

E I G H T Y E I G H T



1993

OWNER'S MANUAL

## Table of Contents

	<i>The Power of Intelligent Engineering.</i>	3
	<i>How to Use this Manual</i>	6
<b>Part 1</b>	<i>Seats &amp; Safety Belts</i>	11
<b>2</b>	<i>Features &amp; Controls</i>	45
<b>3</b>	<i>Comfort Controls &amp; Audio Systems</i>	127
<b>4</b>	<i>Your Driving and the Road</i>	147
<b>5</b>	<i>Problems on the Road</i>	193
<b>6</b>	<i>Service &amp; Appearance Care</i>	221
<b>7</b>	<i>Maintenance Schedule</i>	275
<b>8</b>	<i>Customer Assistance Information</i> <i>Includes "Reporting Safety Defects" on page 302</i>	297
<b>9</b>	<i>Index</i>	311
	<i>Service Station Information</i>	<i>Last Page</i>



## **Important Notes About this Manual**

Please keep this manual in your Oldsmobile, so it will be there if you ever need it when you're on the road. If you sell the vehicle, please leave this manual in it so the new owner can use it.

This manual includes the latest information at the time it was printed. We reserve the right to make changes in the product after that time without further notice.

## **Note to Canadian Owners**

For vehicles first sold in Canada, substitute the name "General Motors of Canada Limited" for Oldsmobile Division whenever it appears in this manual.

## **For Canadian Owners Who Prefer a French Language Manual**

**Aux propriétaires canadiens:** Vous pouvez vous procurer un exemplaire de ce guide en français chez votre concessionnaire ou au DGN Marketing Services Ltd., 1500 Bonhill Rd., Mississauga, Ontario L5T 1C7.

Published by  
**Oldsmobile Division**  
General Motors Corporation  
920 Townsend Street  
Lansing, Michigan 48921

The word *Oldsmobile* and the Oldsmobile rocket emblem are registered trademarks of General Motors Corporation.

The word *Delco* is a registered trademark of General Motors Corporation.

## The Power of Intelligent Engineering

Engineering with a purpose. It's at the heart of every Oldsmobile. Your new Oldsmobile continues a 96-year tradition of engineering excellence.

That tradition was born in Lansing, Michigan, on August 21, 1897, when Ransom E. Olds began building a horseless carriage "in as nearly a perfect manner as possible." Soon, Oldsmobiles rolled off the nation's first assembly line.

Innovation and refinement have always set Oldsmobiles apart. In 1939, Oldsmobile introduced the celebrated Hydra-Matic transmission, a four-speed forerunner of today's advanced systems. In 1948, the high-spirited Rocket V8 engine set standards for performance.



1941

1931



## A Step Ahead

In 1966, Toronado made front-wheel-drive news, including Motor Trend's "Car of the Year." Still breaking new ground, the 1974 "Toro" became the first car equipped with a production "air bag."


Recent Oldsmobile engineering has created exciting advancements like the responsive Quad 4 engine. Versions of the 4-cylinder, 16-valve Quad 4 propelled Oldsmobiles on roads and racetracks to new standards of economy and performance.

Today, the all-wheel-drive security of SmartTrak in the Oldsmobile Bravada continues that proud tradition of meaningful technology.

1965



1960

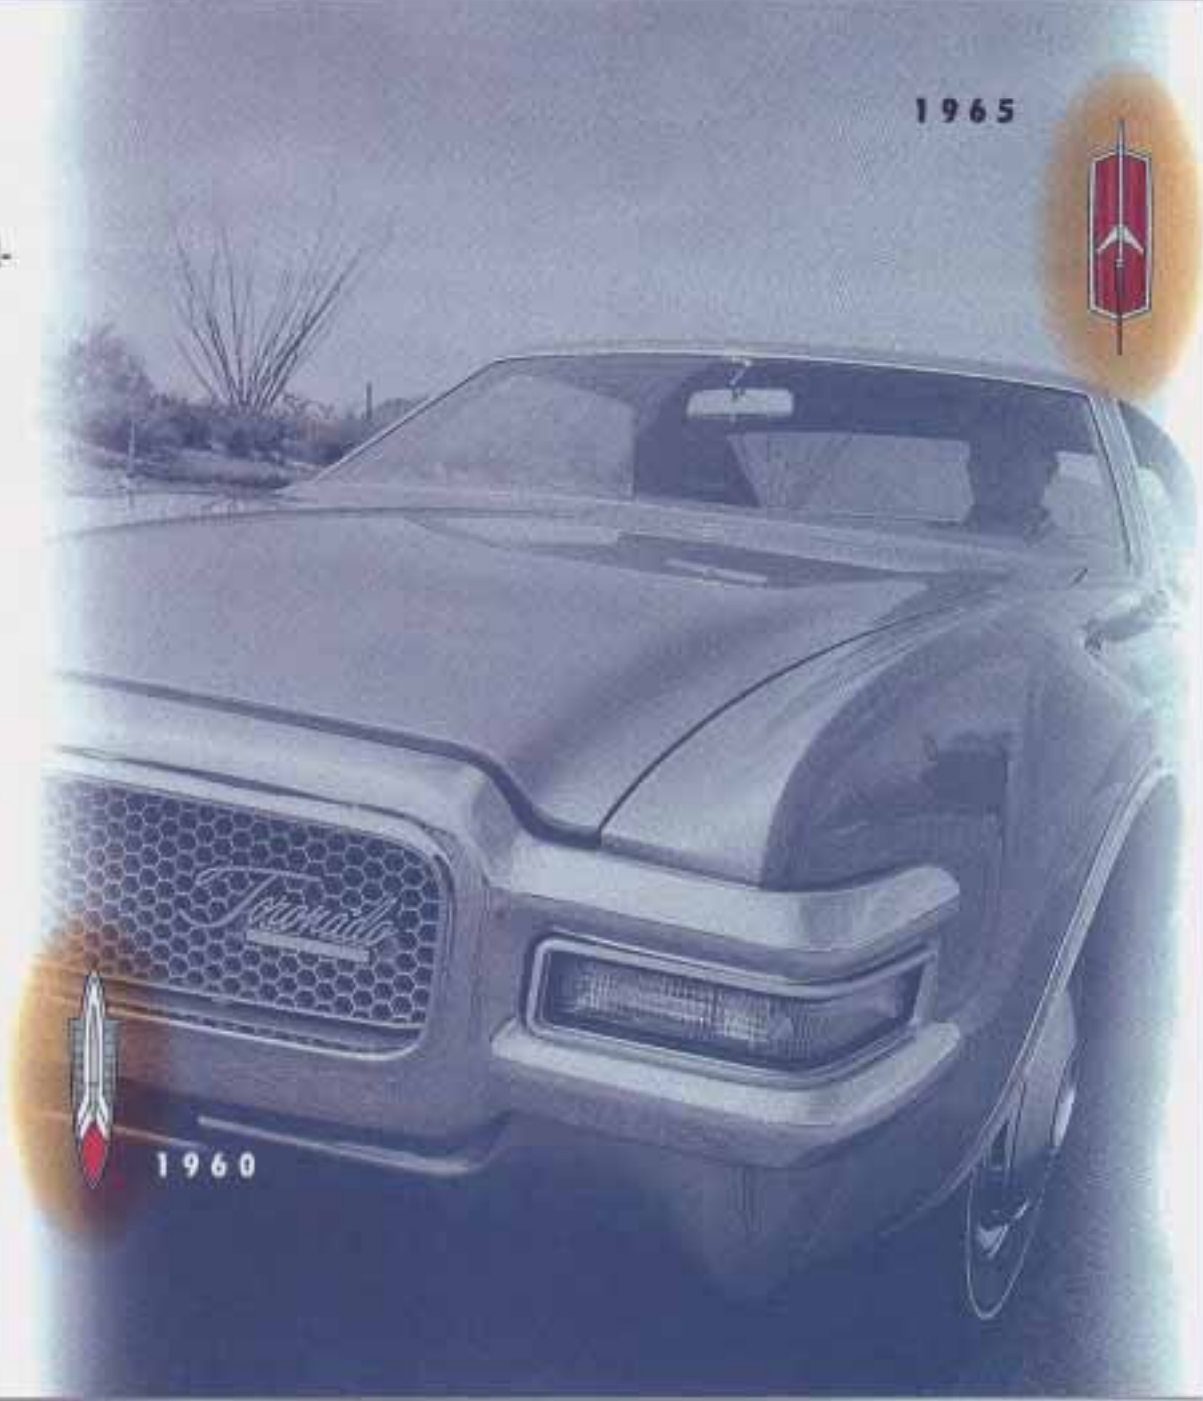



## The Security of Owner Satisfaction

---

The quality we built into your new Oldsmobile gives us the confidence to back it with the Oldsmobile Edge—the most comprehensive owner satisfaction program in the industry. The Edge gives you 24-hour roadside assistance, Bumper-to-Bumper Plus Warranty protection, even free transportation while your vehicle is in for warranty service. With the Oldsmobile Edge, we've pledged to make your ownership experience a great one.

J. D. Rock  
General Manager





## How to Use this Manual

MANY PEOPLE READ THEIR OWNER'S manual from beginning to end when they first receive their new vehicle. This will help you learn about the features and controls for your vehicle. In this manual, you'll find that pictures and words work together to explain things quickly.

There are nine parts with color-tabbed pages to help you find each of the parts of this manual. Each part begins with a brief list of contents, so you can usually tell at a glance if that part contains the information you want.

You can bend the manual slightly to reveal the color tabs that help you find a part.

### **Part 1: Seats & Safety Belts**

This part tells you how to use your seats and safety belts properly.

### **Part 2: Features & Controls**

This part explains how to start and operate your Oldsmobile.

### **Part 3: Comfort Controls & Audio Systems**

This part tells you how to adjust the ventilation and comfort controls and how to operate your audio system.



### **Part 4: Your Driving and the Road**

Here you'll find helpful information and tips about the road and how to drive under different conditions.

### **Part 5: Problems on the Road**

This part tells you what to do if you have a problem while driving, such as a flat tire or engine overheating.

### **Part 6: Service & Appearance Care**

Here the manual tells you how to keep your Oldsmobile running properly and looking good.

### **Part 7: Maintenance Schedule**

This part tells you when to perform vehicle maintenance and what fluids and lubricants to use.

### **Part 8: Customer Assistance Information**

This part tells you how to contact Oldsmobile for assistance and how to get service publications. It also gives you information on *Reporting Safety Defects*.

### **Part 9: Index**

Here's an alphabetical listing of almost every subject in this manual. You can use it to quickly find something you want to read.

### **Service Station Information:**

This is a quick reference of service information. You can find it on the last page of this manual.





## How to Use this Manual

### *Safety Warnings and Symbols*

You will find a number of safety cautions in this book. We use yellow and the word CAUTION to tell you about things that could hurt you if you were to ignore the warning.

#### **CAUTION**



These mean there is something that could hurt you or other people.

In the yellow caution area, we tell you what the hazard is. Then we tell you what to do to help avoid or reduce the hazard. Please read these cautions. If you don't, you or others could be hurt.

You will also find a red circle with a slash through it in this book. This safety symbol means:

*Don't*  
*Don't do this*  
*Don't let this happen*



### *Vehicle Damage Warnings*

Also, in this book you will find these blue notices:

#### **NOTICE**

These mean there is something that could damage your vehicle.

In the blue notice area, we tell you about something that can damage your vehicle. Many times, this damage would not be covered by your warranty, and it could be costly. But the notice will tell you what to do to help avoid the damage.

When you read other manuals, you might see CAUTION and NOTICE warnings in different colors or in different words. In this manual, we've used the familiar words and colors that Oldsmobile has used for years.

You'll also see warning labels on your vehicle. They use the same colors, and the words CAUTION or NOTICE.

## ***Vehicle Symbols***

These are some of the symbols you will find on your vehicle. For example, these symbols are used on an original battery:

<i>Caution Possible Injury</i>	
<i>Protect Eyes by Shielding</i>	
<i>Caustic Battery Acid Could Cause Burns</i>	
<i>Avoid Sparks or Flames</i>	
<i>Spark or Flame Could Explode Battery</i>	

These symbols are important for you and your passengers whenever your vehicle is driven:

<i>Fasten Safety Belts</i>	
<i>Door Lock/Unlock</i>	

These symbols have to do with your lights:

<i>Master Lighting Switch</i>	
<i>Turn Signal Direction</i>	
<i>Hazard Warning Flashers</i>	
<i>Headlight High Beam</i>	
<i>Parking Lights</i>	



## How to Use this Manual

### **Vehicle Symbols (CONT.)**

These symbols are on some of your controls:

*Windshield Wipers*



*Windshield Washer*



*Windshield Defroster*



*Rear Window Defogger*



*Ventilating Fan*



*Power Window*



These symbols are used on warning and indicator lights:

*Engine Coolant Temperature*




*Battery Charging System*



*Fuel*



*Engine Oil Pressure*



*Brake*



*Anti-Lock Brakes*



Here are some other symbols you may see:

*Fuse*



*Lighter*



*Horn*



*Speaker*



*Hood Release*





# Part 1

## Seats & Safety Belts

Here you'll find information about the seats in your Oldsmobile, your Supplemental Inflatable Restraint ("air bag") system and how to use your safety belts properly. You can also learn about some things you should not do with safety belts.

Seats and Seat Controls .....	12
Safety Belts .....	14
How to Wear Safety Belts Properly .....	19
Driver Position .....	19
Supplemental Inflatable Restraint System (Air Bag) .....	23
Safety Belt Use During Pregnancy .....	28
Right Front Passenger Position .....	29
Center Passenger Position .....	29
Rear Seat Passengers .....	30
Children .....	32
Smaller Children and Babies .....	32
Child Restraints .....	33
Larger Children .....	41
Safety Belt Extender .....	42
Replacing Safety Belts After a Crash .....	43



# Seats & Safety Belts



H1104

## ■ *Seats and Seat Controls*

This section tells you about the seats—how to adjust them—and also about reclining seatbacks and head restraints.


### *Manual Front Seat*

#### **CAUTION**



You can lose control of the vehicle if you try to adjust a manual driver's seat while the vehicle is moving. The sudden movement could startle and confuse you, or make you push a pedal when you don't want to. Adjust the driver's seat only when the vehicle is not moving.

Move the control lever under the front of the seat to unlock it. Slide the seat to where you want it. Then release the lever and try to move the seat with your body, to make sure the seat is locked into place.

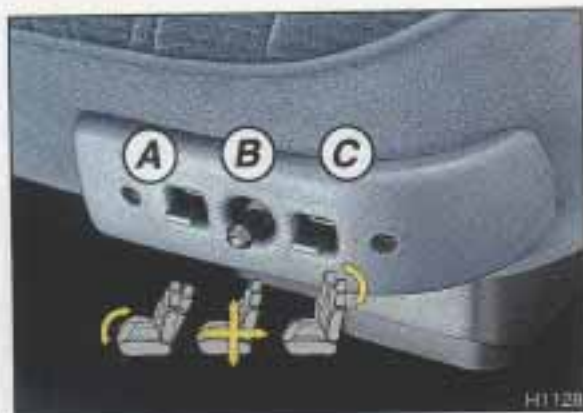

### **Six-Way Power Seat (OPTION)**


To adjust the six-way power seat:

**Front Control (A):** Raise the front of the seat by holding the switch up. Lower the front of the seat by holding the switch down.

**Center Control (B):** Move the seat forward or back by holding the control to the right or left.

Move the seat higher by holding the control up. Lower the seat by holding the control down.

**Rear Control (C):** Raise the rear of the seat by holding the switch up. Lower the rear of the seat by holding the switch down.

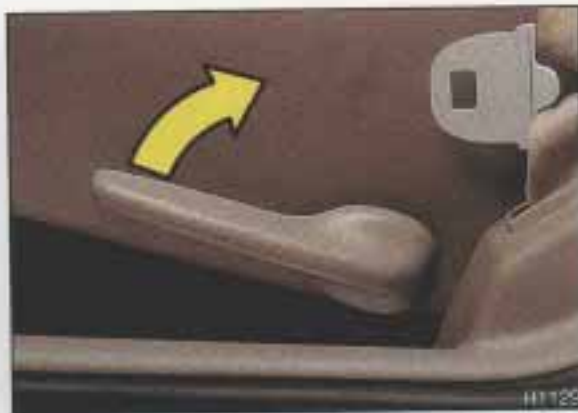

### **Manual Reclining Seatback**

Lift the lever to release the seatback, then tilt the seatback forward or backward, as desired. Release the lever to lock the seatback in place.

But don't have a seatback reclined if your vehicle is moving.



### **CAUTION**



Sitting in a reclined position when your vehicle is in motion can be dangerous. Even if you buckle up, your safety belts can't do their job when you're reclined like this.

The shoulder belt can't do its job because it won't be against your body. Instead, it will be in front of you. In a crash you could go into it, receiving neck or other injuries.

The lap belt can't do its job either. In a crash the belt could go up over your abdomen. The belt forces would be there, not at your pelvic

*(Continued)*

# Seats & Safety Belts



## Manual Reclining Seatback (CONT.)

### CAUTION



*(Continued)*

bones. This could cause serious internal injuries.

For proper protection when the vehicle is in motion, have the seatback upright. Then sit well back in the seat and wear your safety belt properly.

## Head Restraints

Slide the head restraint up or down so that the top of the restraint is closest to the top of your ears.

This position reduces the chance of a neck injury in a crash.

## ■ Safety Belts: *They're For Everyone*

This part of the manual tells you how to use safety belts properly. It also tells you some things you should not do with safety belts. And it explains the Supplemental Inflatable Restraint, or "air bag" system.



## CAUTION



Don't let anyone ride where they can't wear a safety belt properly. If you are in a crash and you're not wearing a safety belt, your injuries can be **much** worse. You can hit things inside the vehicle or be ejected from it. You can be seriously injured or killed. In the same crash, you might not be if you are buckled up. Always fasten your safety belt, and check that your passengers' belts are fastened properly too.



This figure lights up when you turn the key to **Run** or **Start** when your safety belt isn't buckled, and you'll hear a chime, too. It's the reminder to buckle up. In many states and Canadian provinces, the law says to wear safety belts. Here's why: **They work.**



You never know if you'll be in a crash. If you do have a crash, you don't know if it will be a bad one.

A few crashes are very mild. In them, you won't get hurt even if you're not buckled up. And some crashes can be so serious, like being hit by a train, that even buckled up a person wouldn't survive. But most crashes are in between. In many of them, people who buckle up can survive and sometimes walk away. Without belts they could be badly hurt or killed.

After 25 years of safety belts in vehicles, the facts are clear. In most crashes buckling up does matter . . . a lot!

# Seats & Safety Belts



## ***Why Safety Belts Work***


When you ride in or on anything, you go as fast as it goes.

- 1. For example, if the bike is going 10 mph (16 km/h), so is the child.**


- 2. When the bike hits the block, it stops. But the child keeps going!**

- 3. Take the simplest "car." Suppose it's just a seat on wheels.**



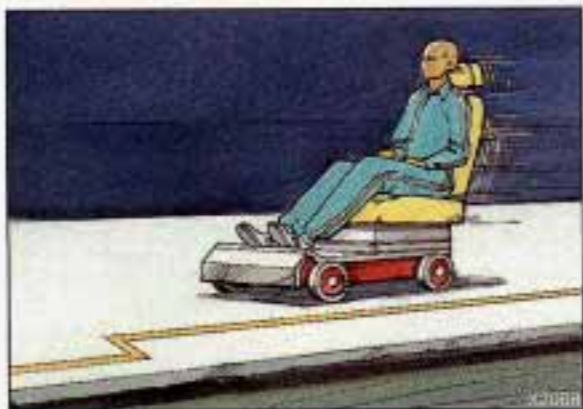

**4. Put someone on it.**

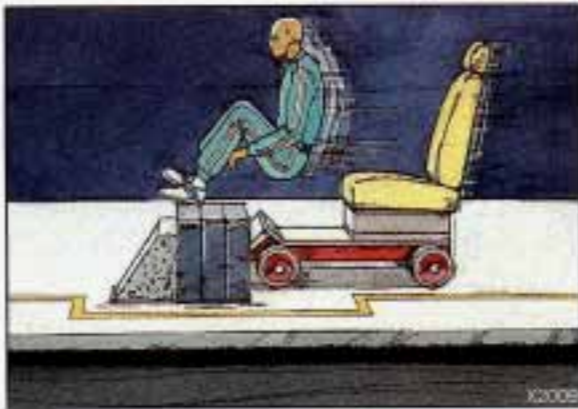

**5. Get it up to speed. Then stop the "car." The rider doesn't stop.**



**6. The person keeps going until stopped by something. In a real vehicle, it could be the windshield...**



**7. or the instrument panel...**



**8. or the safety belts!**

With safety belts, you slow down as the vehicle does. You get more time to stop. You stop over more distance, and your strongest bones take the forces. That's why safety belts make such good sense.



## Seats & Safety Belts

### *Here Are Questions Many People Ask About Safety Belts—and the Answers*

**Q:** Won't I be trapped in the vehicle after an accident if I'm wearing a safety belt?

**A:** You **could** be—whether you're wearing a safety belt or not. But you can easily unbuckle a safety belt, even if you're upside down. And your chance of being conscious during and after an accident, so you **can** unbuckle and get out, is **much** greater if you are belted.

**Q:** Why don't they just put in air bags so people won't have to wear safety belts?

**A:** "Air bags," or Supplemental Inflatable Restraint systems, are in some vehicles today and will be in more of them in the future. But they are supplemental systems only—so they work **with** safety belts, not instead of them. Every "air bag" system ever offered for sale has required the use of safety belts. Even if you're in a vehicle that has "air bags," you still have to buckle up to get the most protection. That's true not only in frontal collisions, but especially in side and other collisions.

**Q:** If I'm a good driver, and I never drive far from home, why should I wear safety belts?

**A:** You may be an excellent driver, but if you're in an accident—even one that isn't your fault—you and your passengers can be hurt. Being a good driver doesn't protect you from things beyond your control, such as bad drivers.

Most accidents occur within 25 miles (40 km) of home. And the greatest number of serious injuries and deaths occur at speeds of less than 40 mph (65 km/h).

Safety belts are for everyone.



### **Safety Belt Reminder Light**

When the key is turned to **Run** or **Start**, a light will come on for about eight seconds to remind people to fasten their safety belts. Unless the driver's safety belt is buckled, a chime will also sound.

### ■ **How to Wear Safety Belts Properly—Adults**


This section is only for people of adult size.

#### **CAUTION**



There are special things to know about safety belts and children. And there are different rules for babies and smaller children. If a child will be riding in your Oldsmobile, see the *Index* under *Children and Safety Belts*. Follow those rules for everyone's protection.


First, you'll want to know which restraint systems your vehicle has. We'll start with the driver position.

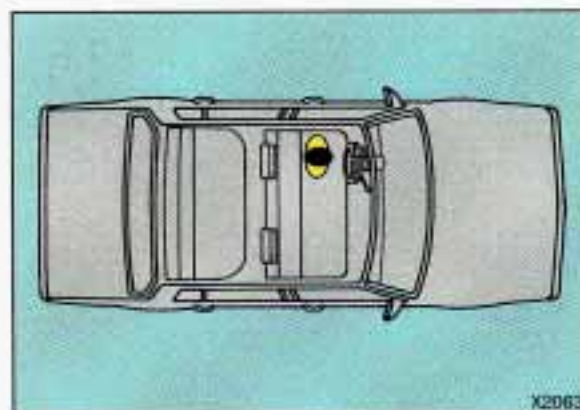

### **Driver Position**

This section describes the driver's restraint system.

## Seats & Safety Belts

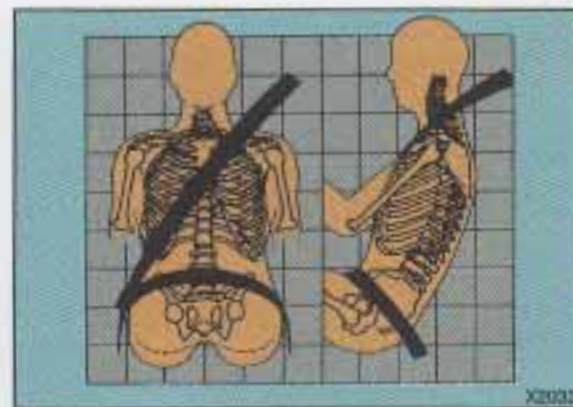

### Lap-Shoulder Belt

The driver has a lap-shoulder belt. Here's how to wear it properly.

1. Close and lock the door.
2. Adjust the seat (to see how, see the *Index* under *Seat Controls*) so you can sit up straight.

3. Pick up the latch plate and pull the belt across you. Don't let it get twisted.

4. Push the latch plate into the buckle until it clicks.

If the belt isn't long enough, see the *Index* under *Safety Belt Extender*.

Make sure the release button on the buckle faces upward or outward so you would be able to unbuckle it quickly if you ever had to.

The lap part of the belt should be worn low and snug on the hips, just touching the thighs. In a crash, this applies force to the strong pelvic bones. And you'd be less likely to slide under the lap belt. If you slid under it, the belt would apply force at your abdomen. This could cause serious or even fatal injuries. The shoulder belt should go over the shoulder and across the chest. These parts of the body are best able to take belt restraining forces.

The safety belt locks if there's a sudden stop or crash.





### **Shoulder Belt Height Adjuster**

You can move the shoulder belt adjuster to the height that is right for you.



To move it up or down, squeeze the release handle. When you release the handle, try to move it down a little to make sure it has locked into position.

You can move the adjuster up from a lower position by pushing the bottom of the release handle.



Adjust the height so that the shoulder portion of the belt is properly positioned on your shoulder, away from your face and neck.

To help you find a height that is right for you, follow these guidelines:

#### **For a Tall Person:**

Use the upper or upper-middle position.


#### **For a Person of Average Height:**

Use a position somewhere in the middle.

#### **For a Short Person:**

Use the lower or lower-middle position.

# Seats & Safety Belts

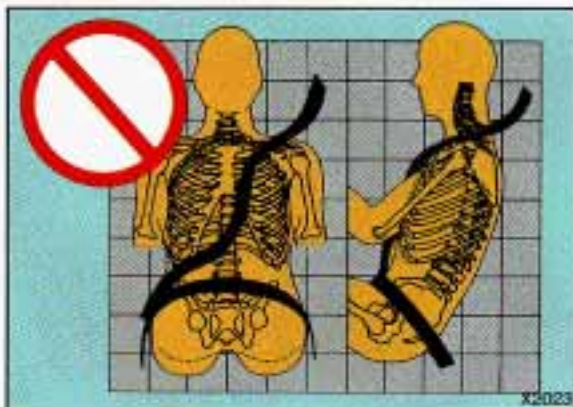

## Lap-Shoulder Belt (CONT.)


**Q:** What's wrong with this?

**A:** The shoulder belt is too loose. It won't give nearly as much protection this way.

### CAUTION



You can be seriously hurt if your shoulder belt is too loose. In a crash, you would move forward too much, which could increase injury. The shoulder belt should fit against your body.

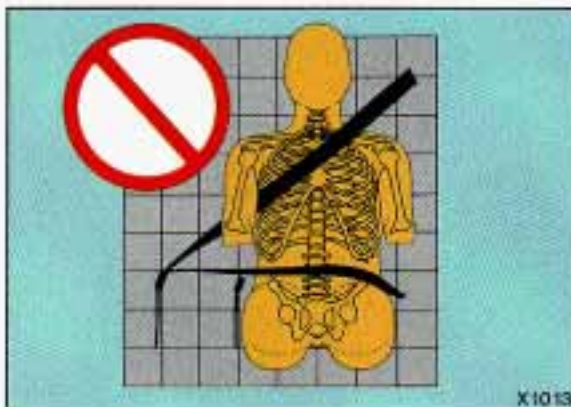


**Q:** What's wrong with this?

**A:** The belt is buckled in the wrong place.

### CAUTION



You can be seriously injured if your belt is buckled in the wrong place like this. In a crash, the belt would go up over your abdomen. The belt forces would be there, not at the pelvic bones. This could cause serious internal injuries. Always buckle your belt into the buckle nearest you.

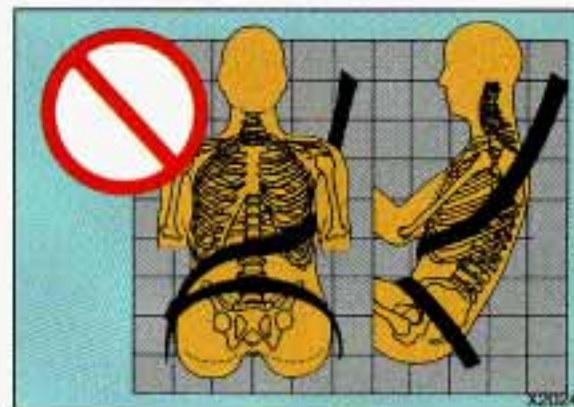

**Q:** What's wrong with this?


**A:** The shoulder belt is worn under the arm. It should be worn over the shoulder at all times.

### CAUTION



You can be seriously injured if you wear the shoulder belt under your arm. In a crash, your body would move too far forward, which would increase the chance of head and neck injury. Also, the belt would apply too much force to the ribs, which aren't as strong as shoulder bones. You could also severely injure internal organs like your liver or spleen.



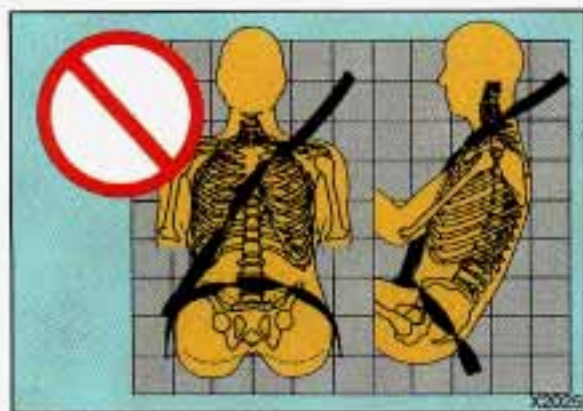

**Q: What's wrong with this?**

**A: The belt is twisted across the body.**

### **CAUTION**



You can be seriously injured by a twisted belt. In a crash, you wouldn't have the full width of the belt to spread impact forces. If a belt is twisted, make it straight so it can work properly, or ask your dealer to fix it.



To unlatch the belt, just push the button on the buckle. The belt should go back out of the way.

Before you close the door, be sure the belt is out of the way. If you slam the door on it, you can damage both the belt and your vehicle.



### ■ ***Supplemental Inflatable Restraint System (Air Bag)***

This section explains the driver's Supplemental Inflatable Restraint (SIR) system, commonly referred to as an air bag.




# Seats & Safety Belts


## ■ Supplemental Inflatable Restraint System (Air Bag) (Cont.)

Here are the Most Important Things to Know:

### CAUTION

 Even with an air bag, if you're not wearing a safety belt and you're in a crash, your injuries may be much worse. Air bags are not designed to inflate in rollovers or in rear, side or low-speed frontal crashes. You need to wear your safety belt to reduce the chance of hitting things inside the vehicle or being ejected from it. Always wear your safety belt, even with an air bag.

### CAUTION

 Air bags inflate with great force, faster than the blink of an eye. If you're too close to an inflating air bag, it could seriously injure you. Safety belts help keep you in position for an air bag inflation in a crash. Always wear your safety belt, even with an air bag, and sit as far back as you can while still maintaining control of your vehicle.

**INFL. REST.**

C1079

**INFLATABLE  
RESTRAINT**

C1080

**AIR BAG**

C1103

### *Air Bag System Light*

There is an air bag readiness light on the instrument panel. Depending on what cluster you have, it will read **AIR BAG**, **INFL. REST.** or **INFLATABLE RESTRAINT**. The system checks itself and the light tells you if there is a problem.



You will see this light flash for a few seconds when you turn your ignition to **Run** or **Start**. Then the light should go out, which means the system is ready.

### **CAUTION**



If the air bag readiness light doesn't come on when you start your vehicle, or stays on, or comes on when you are driving, your air bag system may not work properly. Have your vehicle serviced right away.

### **How the Air Bag System Works**

**Q: Where is the air bag?**

**A:** The driver's air bag is in the middle of the steering wheel.

**Q: When is an air bag expected to inflate?**

**A:** The air bag is designed to inflate in moderate to severe frontal or near-frontal crashes. The air bag will only inflate if the velocity of the impact is above the designed threshold level. When impacting straight into a wall that does not move or deform, the threshold level for most GM vehicles is between 9 and 14 mph (14 and 23 km/h). However, this velocity threshold depends on the vehicle design and may be several miles-per-hour faster or slower. In addition,

this threshold velocity will be considerably higher if the vehicle strikes an object such as a parked car which will move and deform on impact. The air bag is also not designed to inflate in rollovers, side impacts, or rear impacts where the inflation would provide no occupant protection benefit.

In any particular crash, the determination of whether the air bag should have inflated cannot be based solely on the level of damage on the vehicle(s). Inflation is determined by the angle of the impact and the vehicle's deceleration, of which vehicle damage is only one indication. Repair cost is not a good indicator of whether an air bag should have deployed.



# Seats & Safety Belts

## ***How the Air Bag System Works*** *(CONT.)*

**Q:** What makes an air bag inflate?

**A:** In a frontal impact of sufficient severity, sensors strategically located on the vehicle detect that the vehicle is suddenly stopping as a result of a crash. These sensors complete an electrical circuit, triggering a chemical reaction of the sodium azide sealed in the inflator. The reaction produces nitrogen gas, which inflates the cloth bag. The inflator, cloth bag, and related hardware are all part of the air bag inflator module packed inside the steering wheel.

**Q:** How does an air bag restrain?

**A:** In moderate to severe frontal or near-frontal collisions, even belted occupants can contact the steering wheel. The air bag supplements the protection provided by safety belts. Air bags distribute the force of the impact more evenly over the occupant's upper body, stopping the occupant more gradually. But air bags would not provide protection in many types of collisions, including rollovers and rear and side impacts, primarily because an occupant's motion is not toward the air bag. Air bags should never be regarded as anything more than a supplement to safety belt protection in moderate to severe frontal and near-frontal collisions.

**Q:** What will you see after an air bag inflation?

**A:** After the air bag has inflated, it will then quickly deflate. This occurs so quickly that some people may not even realize that the air bag inflated. The air bag will **not** impede the driver's vision or ability to steer the vehicle, nor will it hinder the occupants from exiting the vehicle. There will be small amounts of smoke coming from vents in the deflated air bag. Some components of the air bag module in the steering wheel hub may be hot for a short time, but the portion of the bag that comes into contact with you will not be hot to the touch. The nitrogen gas used to inflate the air bag will have vented into the passenger compartment, and



the bag will be deflated within seconds after the collision. Nitrogen makes up about 80% of the air we breathe and is not hazardous. As the nitrogen vents from the bag, small particles are also vented into the passenger compartment.

### **CAUTION**



- Don't attach anything to the steering wheel pad. It might injure the driver if the air bag inflates.
- The air bag is designed to inflate only once. After it inflates, you'll need some new parts for your air bag system. If you don't get them, the air bag system won't be there to help protect you in another crash. A new system will include the air bag module and possibly other parts. The service manual has information about the need to replace other parts.
- Let only qualified technicians work on your air bag system. Improper service can mean that your air bag system won't work properly. See your dealer for service.

### ***Servicing Your Oldsmobile with the Air Bag System***

Please tell or remind anyone who works on your Oldsmobile that it has the air bag system. There are parts of the air bag system in several places around your vehicle. You don't want the system to inflate while someone is working on your vehicle. The air bag system does not need regular maintenance. Your Oldsmobile dealer and the 1993 Eighty Eight Service Manual have information about the air bag system, including repair or disposal.

### **CAUTION**



For up to 10 minutes after the ignition key is turned off and the battery disconnected, an air bag can still inflate during improper service. You can be injured if you are close to an air bag when it inflates. Be sure to follow the proper service procedures.

# Seats & Safety Belts

## ***Servicing Your Oldsmobile with the Air Bag System (CONT.)***

When electrical work is done under the hood or inside your vehicle, the ignition should be in **LOCK**, if possible.

Avoid wires wrapped with yellow tape, or yellow connectors. They are probably part of the air bag system.

But if the ignition has to be on for electrical work, or if the steering column is to be disassembled, the air bag system must be disconnected. To do this:

- Turn off the ignition.
- Remove the SIR (air bag) fuse (see the *Index* under *Fuses & Circuit Breakers*).
- Disconnect the yellow connector at the base of the steering column.

When the work is complete, if the air bag system was disconnected, be sure to reattach everything and replace the fuse before turning the ignition on. When you turn the ignition key on, be sure you see the inflatable restraint light on the instrument panel. If you don't see this light flash and then go out as usual, have your air bag system repaired.




## ***Safety Belt Use During Pregnancy***

Safety belts work for everyone, including pregnant women. Like all occupants, they are more likely to be seriously injured if they don't wear safety belts.


A pregnant woman should wear a lap-shoulder belt, and the lap portion should be worn as low as possible throughout the pregnancy.

The best way to protect the fetus is to protect the mother. When a safety belt is worn properly, it's more likely that the fetus won't be hurt in a crash. For pregnant women, as for anyone, the key to making safety belts effective is wearing them properly.



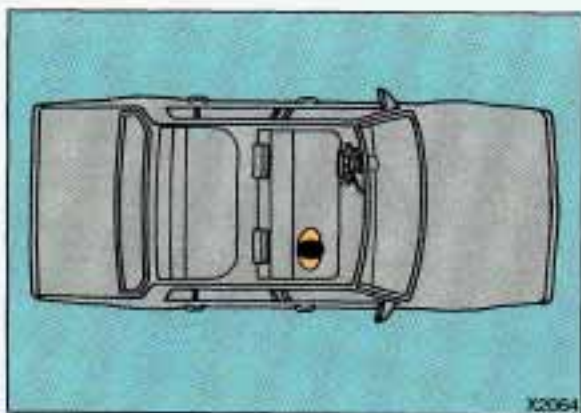

X2064

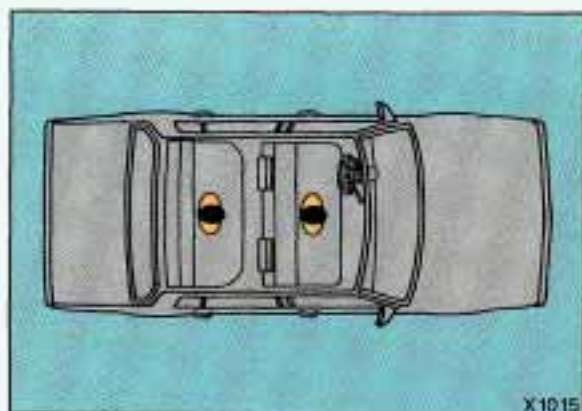

X1015



### ***Right Front Passenger Position***

The right front passenger's safety belt works the same way as the driver's safety belt. See the *Index* under *Driver Position*.

When the lap portion of the belt is pulled out all the way, it will lock. If it does, let it go back all the way and start again.

If your vehicle has a center passenger position, be sure to use the correct buckle when buckling your lap-shoulder belt. If you find that the latch plate will not go fully into the buckle, see if you are using the buckle for the center passenger position.

### ***Center Passenger Position***

If your vehicle has rear and/or front bench seats, someone can sit in the center positions.

When you sit in a center seating position, you have a lap safety belt, which has no retractor.

To make the belt longer, tilt the latch plate and pull it along the belt.



## Seats & Safety Belts



### **Center Passenger Position (CONT.)**

To make the belt shorter, pull its free end as shown until the belt is snug.

Buckle, position and release it the same way as the lap part of a lap-shoulder belt.


If the belt isn't long enough, see the *Index* under *Safety Belt Extender*.

Make sure the release button on the buckle faces upward or outward so you would be able to unbuckle it quickly if you ever had to.

### **Rear Seat Passengers**


It's very important for rear seat passengers to buckle up! Accident statistics show that unbelted people in the rear seat are hurt more often in crashes than those who are wearing safety belts.

Rear passengers who aren't safety belted can be thrown out of the vehicle in a crash. And they can strike others in the vehicle who are wearing safety belts.

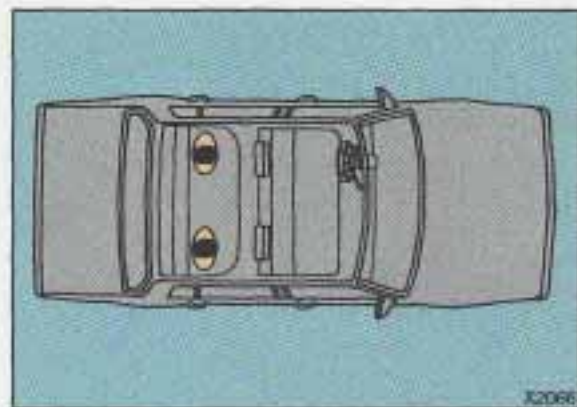

### **Rear Seat Outside Passenger Positions**

The positions next to the windows have lap-shoulder belts.

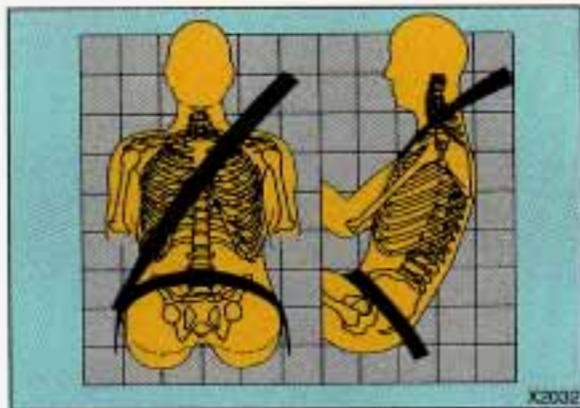

### Here's How to Wear One Properly:

1. Pick up the latch plate and pull it across you. Don't let it get twisted.
2. Push the latch plate into the buckle until it clicks.

When the lap belt is pulled out all the way, it will lock. If it does, let it go back all the way and start again.

If the belt is not long enough, see the *Index* under *Safety Belt Extender*.

Make sure the release button on the buckle faces upward or outward so you would be able to unbuckle it quickly if you ever had to.

The lap part of the belt should be worn low and snug on the hips, just touching the thighs. In a crash, this applies force to the strong pelvic bones. And you'd be less likely to slide under the lap belt. If you slid under it, the belt would apply force at your abdomen. This could cause serious or even fatal injuries. The shoulder belt should go over the shoulder and across the chest. These parts of the body are best able to take belt restraining forces.

The safety belt locks if there's a sudden stop or a crash.

### CAUTION



You can be seriously hurt if your shoulder belt is too loose. In a crash you would move forward too much, which could increase injury. The shoulder belt should fit against your body.



## Seats & Safety Belts



### **Rear Seat Outside Passenger Positions (CONT.)**

To unlatch the belt, just push the button on the buckle.



### ■ **Children**

Everyone in a vehicle needs protection! That includes infants and all children smaller than adult size. In fact, the law in every state and Canadian province says children up to some age must be restrained while in a vehicle.

### **Smaller Children and Babies**

#### **CAUTION**



Smaller children and babies should always be restrained in a child or infant restraint. The instructions for the restraint will say whether it is the right type and size for your child. A very young child's hip bones are so small that a regular belt might not stay low on the hips, as it should. Instead, the belt will likely be over the child's abdomen. In a crash the belt would apply force right on the child's abdomen, which could cause serious or fatal injuries. So, be sure that any child small enough for one is always properly restrained in a child or infant restraint.





## CAUTION



Never hold a baby in your arms while riding in a vehicle. A baby doesn't weigh much—until a crash. During a crash a baby will become so heavy you can't hold it. For example, in a crash at only 25 mph (40 km/h), a 12-pound (5.5 kg) baby will suddenly become a 240-pound (110 kg) force on your arms. The baby would be almost impossible to hold.

*(Continued)*

## CAUTION



*(Continued)*

Secure the baby in an infant restraint.

## Child Restraints

Be sure to follow the instructions for the restraint. You may find these instructions on the restraint itself or in a booklet, or both. These restraints use the belt system in your vehicle, but the child also has to be secured within the restraint to help reduce the chance of personal injury. The instructions that come with the infant or child restraint will show you how to do that.

# Seats & Safety Belts

## Where to Put the Restraint

Accident statistics show that children are safer if they are restrained in the rear rather than the front seat. We at General Motors therefore recommend that you put your child restraint in the rear seat unless the child is an infant and you're the only adult in the vehicle. In that case, you might want to secure the restraint in the front seat where you can keep an eye on the baby.

Wherever you install it, be sure to secure the child restraint properly.

### CAUTION




An unsecured child restraint can move around in a collision or sudden stop and injure people in the vehicle. Be sure to properly secure any child restraint in your vehicle—even when no child is in it.



## Top Strap

If your child restraint has a top strap, it should be anchored. If you need to have an anchor installed, you can ask your Oldsmobile dealer to put it in for you. If you want to install an anchor yourself, your dealer can tell you how to do it.

Vehicles first sold in Canada have child restraint anchor bracket hardware in the glove box, along with instructions for installing it. This should be used only with a child restraint, and only to secure a child restraint at the center rear seating position. Additional anchor brackets for child restraints at one or both of the rear outside seating positions are available at Oldsmobile dealerships in Canada.

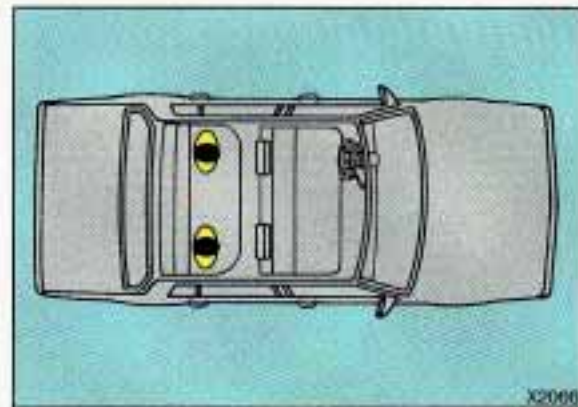

## Securing a Child Restraint in a Rear Outside Position

You'll be using the lap-shoulder belt. See the earlier section about the *Top Strap* if the child restraint has one.





- 1.** Put the restraint on the seat. Follow the instructions for the child restraint.
- 2.** Secure the child in the child restraint as the instructions say.
- 3.** Pull out the vehicle's safety belt and run the lap part through or around the restraint. The child restraint instructions will show you how.  
See if the shoulder belt would go in front of the child's face or neck. If so, put it behind the child restraint.



- 4.** Buckle the belt. Make sure the release button faces upward or outward, so you'll be able to unbuckle it quickly if you ever need to.

- 5.** Pull the rest of the lap belt all the way out of the retractor to set the lock.



## Seats & Safety Belts




### ***Securing a Child Restraint in a Rear Outside Position (CONT.)***

6. To tighten the belt, feed the lap belt into the retractor while you push down on the child restraint.



7. Push and pull the child restraint in different directions to be sure it is secure.

To remove the child restraint, just unbuckle the vehicle's safety belt and let it go back all the way. The safety belt will move freely again and be ready to work for an adult or larger child passenger.

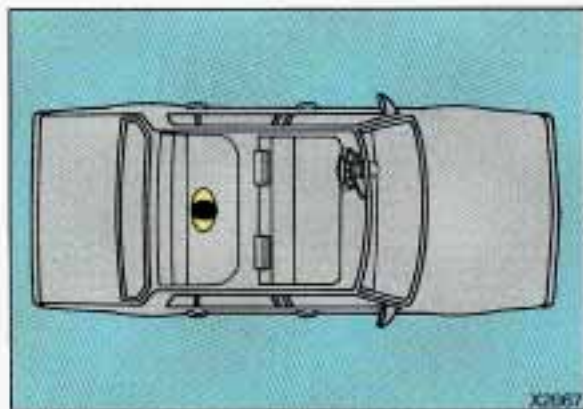

### ***Securing a Child Restraint in a Center Seat Position***

When you secure a child restraint in a center seating position, you'll be using the lap belt. See the earlier section about the *Top Strap* if the child restraint has one.




- 1.** Make the belt as long as possible by tilting the latch plate and pulling it along the belt.
- 2.** Put the restraint on the seat. Follow the instructions for the child restraint.
- 3.** Secure the child in the child restraint as the instructions say.



- 4.** Run the vehicle's safety belt through or around the restraint. The child restraint instructions will show you how.
- 5.** Buckle the belt. Make sure the release button faces upward or outward, so you'll be able to unbuckle it quickly if you ever need to.
- 6.** To tighten the belt, pull its free end while you push down on the child restraint.



## Seats & Safety Belts

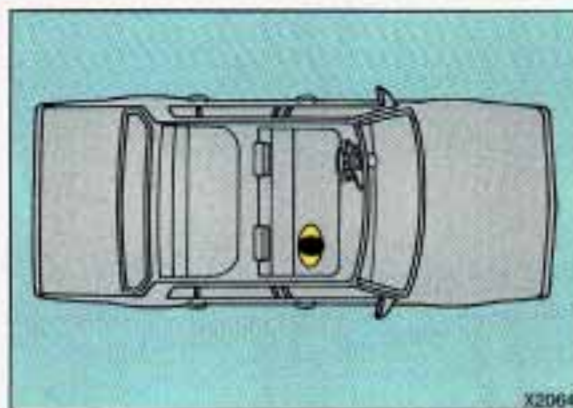

X2064

### **Securing a Child Restraint in the Right Front Seat**

You'll be using the lap-shoulder belt. See the *Index* under *Top Strap* if the child restraint has one.

### **Securing a Child Restraint in a Center Seat Position (CONT.)**

7. Push and pull the child restraint in different directions to be sure it is secure. If the child restraint isn't secure, turn the latch plate over and buckle it again. Then see if it is secure. If it isn't, secure the restraint in a different place in the vehicle and contact the child restraint maker for their advice.

To remove the child restraint, just unbuckle the vehicle's safety belt. It will be ready to work for an adult or larger child passenger.

- 1.** Put the restraint on the seat. Follow the instructions for the child restraint.
- 2.** Secure the child in the child restraint as the instructions say.
- 3.** Pull out the vehicle's safety belt and run the lap part through or around the restraint. The child restraint instructions will show you how.  
See if the shoulder belt would go in front of the child's face or neck. If so, put it behind the child restraint.



- 4.** Buckle the belt. Make sure the release button faces upward or outward, so you'll be able to unbuckle it quickly if you ever need to.



- 5.** Pull the rest of the lap belt all the way out of the retractor to set the lock.



## Seats & Safety Belts



### ***Securing a Child Restraint in the Right Front Seat (CONT.)***

6. To tighten the belt, feed the lap belt back into the retractor while you push down on the child restraint.



7. Push and pull the child restraint in different directions to be sure it is secure.

To remove the child restraint, just unbuckle the vehicle's safety belt and let it go back all the way. The safety belt will move freely again and be ready to work for an adult or larger child passenger.



### Larger Children

Children who have outgrown child restraints should wear the vehicle's safety belts. If you have the choice, a child should sit next to a window so the child can wear a lap-shoulder belt and get the additional restraint a shoulder belt can provide.

Accident statistics show that children are safer if they are restrained in the rear seat. But they need to use the safety belts properly.

- Children who aren't buckled up can be thrown out in a crash.



- Children who aren't buckled up can strike other people who are.



### CAUTION



**Never do this.**

Here two children are wearing the same belt. The belt can't properly spread the impact forces. In a crash, the two children can be crushed together and seriously injured. A belt must be used by only one person at a time.



## Seats & Safety Belts



### **Larger Children (CONT.)**

**Q:** What if a child is wearing a lap-shoulder belt, but the child is so small that the shoulder belt is very close to the child's face or neck?

**A:** Move the child toward the center of the vehicle, but be sure that the shoulder belt still is on the child's shoulder, so that in a crash the child's upper body would have the restraint that belts provide.

If the child is so small that the shoulder belt is still very close to the child's face or neck, you might want to place the child in the center seat position, the one that has only a lap belt.

### **CAUTION**



**Never do this.**

Here a child is sitting in a seat that has a lap-shoulder belt, but the shoulder part is behind the child. If the child wears the belt in this way, in a crash the child might slide under the belt. The belt's force would then be applied right on the child's abdomen. That could cause serious or fatal injuries.

Wherever the child sits, the lap portion of the belt should be worn low and snug on the hips, and just touching the child's thighs. This applies belt force to the child's pelvic bones in a crash.

### **Safety Belt Extender**

If the vehicle's safety belt will fasten around you, you should use it. But if a safety belt isn't long enough to fasten, your dealer will order you an extender. It's free. When you go in to order it, take the heaviest coat you will wear, so the extender will be long enough for you. The extender will be just for you, and just for the seat in your vehicle that you choose. Don't let someone else use it, and use it only for the seat it is made to fit. To wear it, just attach it to the regular safety belt.

### ***Checking Your Restraint Systems***

Now and then, make sure all your belts, buckles, latch plates, retractors, anchorages and reminder systems are working properly. Look for any loose parts or damage. If you see anything that might keep a restraint system from doing its job, have it repaired.


### ***Replacing Safety Belts After a Crash***

If you've had a crash, do you need new belts?

After a very minor collision, nothing may be necessary. But if the belts were stretched, as they would be if worn during a more severe crash, then you need new belts.

If belts are cut or damaged, replace them. Collision damage also may mean you will have to have safety belt parts, like the retractor, replaced or anchorage locations repaired—even if the belt wasn't being used at the time of the collision.


If your seat adjuster won't work after a crash, the special part of the safety belt that goes through the seat to the adjuster may need to be replaced.

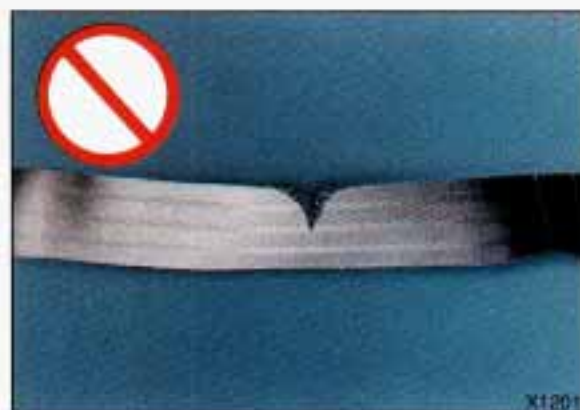

**Q:** What's wrong with this?

**A:** The belt is torn.

#### **CAUTION**

 Torn or frayed belts may not protect you in a crash. They can rip apart under impact forces. If a belt is torn or frayed, get a new one right away.

## Notes





Here you can learn about the many standard and optional features on your Oldsmobile, and information on starting, shifting and braking. Also explained are the instrument panel and the warning systems that tell you if everything is working properly—and what to do if you have a problem.

## Part 2

# Features & Controls


Keys .....	46
Locks .....	47
Glove Box .....	55
Ignition Switch .....	56
Starting Your Engine .....	57
Engine Block Heater .....	58
Shifting the Transaxle .....	60
Parking Brake .....	65
Shifting into Park .....	66
Windows .....	71
Turn Signal and Lane Change Indicator .....	72
Windshield Wipers .....	73
Windshield Washer .....	74
Cruise Control .....	75
Headlights .....	79
Interior Lights .....	82
Mirrors .....	83
Sun Visors .....	85
Ashtrays and Lighter .....	87
Instrument Panel .....	88
Gages .....	97
Warning Lights .....	104
Driver Information System .....	116

# Features & Controls



## Keys

### CAUTION

 Leaving young children in a vehicle with the ignition key is dangerous for many reasons. A child or others could be badly injured or even killed. They could operate power windows or other controls or even make the vehicle move. Don't leave the keys in a vehicle with young children.



The ignition keys are for the ignition only.



The door keys are for the doors and all other locks.

When a new Oldsmobile is delivered, the dealer removes the plugs from the keys and gives them to the first owner. However, the ignition key may not have a plug.

Each plug has a code on it that tells your dealer or a qualified locksmith how to make extra keys. Keep the plugs in a safe place. If you lose your keys, you'll be able to have new ones made easily using these plugs. If your ignition keys don't have plugs, go to your Oldsmobile dealer for the correct key code if you need a new ignition key.


There are 15 alternative PASS-Key® blanks, to help discourage theft. Your dealer can help determine which blank you need.

### NOTICE

Your Oldsmobile has a number of new features that can help prevent theft. But you can have a lot of trouble getting into your vehicle if you ever lock your keys inside. You may even have to damage your vehicle to get in. So be sure you have extra keys.

## Door Locks

### CAUTION

 Unlocked doors can be dangerous.

Passengers—especially children—can easily open the doors and fall out. When a door is locked, the inside handle won't open it.

Outsiders can easily enter through an unlocked door when you slow down or stop your vehicle.

This may not be so obvious: You increase the chance of being thrown out of the vehicle in a crash if the doors aren't locked. Wear safety belts properly, lock your doors, and you will be far better off whenever you drive your vehicle.



There are several ways to lock and unlock your vehicle.

#### From the Outside:

Use your door key or Remote Lock Control, if your vehicle has this option.

#### From the Inside:

To lock the door, slide the locking lever down.

To unlock the door, slide the locking lever up.



## Features & Controls



### **Power Door Locks (OPTION)**

With power door locks, you can lock or unlock all the doors of your vehicle from the driver or front passenger door lock switch.

The switch on each rear door works only that door's lock. It won't lock (or unlock) all of the doors—that's a safety feature.

### **Leaving Your Vehicle**

If you are leaving the vehicle, open your door and set the locks from inside, then get out and close the door.



### **Remote Lock Control (OPTION)**

If your Oldsmobile has this option, you can lock and unlock your doors or unlock your trunk from about 15 feet (4.5 m) away using the key chain transmitter supplied with your vehicle.

#### **Operation**

The driver's door will unlock when **UNLOCK** is pressed. If pressed again within 25 seconds, all doors will unlock. All doors will lock when **LOCK** is pressed.

The trunk will unlock when the opened trunk symbol is pressed, but only when the ignition is off.

Press any button to illuminate the interior lights (see *Illuminated Entry System* later in this section).

### **Matching Transmitters to Your Vehicle**

Each key chain transmitter is coded to prevent another transmitter from unlocking your vehicle. If a transmitter is lost or stolen, a replacement can be purchased through your dealer.

Remember to bring the remaining transmitter with you when you go to your dealer. When the dealer matches the replacement transmitter to your vehicle, the remaining transmitter must also be matched. Once the new transmitter is coded, the lost transmitter will not unlock your vehicle.

You can match a transmitter to as many different vehicles as you own, provided they are equipped with **exactly the same model system**. (General Motors offers several different models of these systems on their vehicles.) Each vehicle can have only two transmitters matched to it. See your dealer to match transmitters to another vehicle.


Your Remote Lock Control operates on a radio frequency subject to Federal Communications Commission (FCC) Rules.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Should interference to this system occur, try this:

- Check to determine if battery replacement is necessary. See the instructions on battery replacement later in this section.
- Check the distance. You may be too far from your vehicle. This product has a maximum range.
- Check the location. Other vehicles or objects may be blocking the signal.
- See your Oldsmobile dealer or a qualified technician for service.

Changes or modifications to this system by other than an authorized service facility could void authorization to use this equipment.

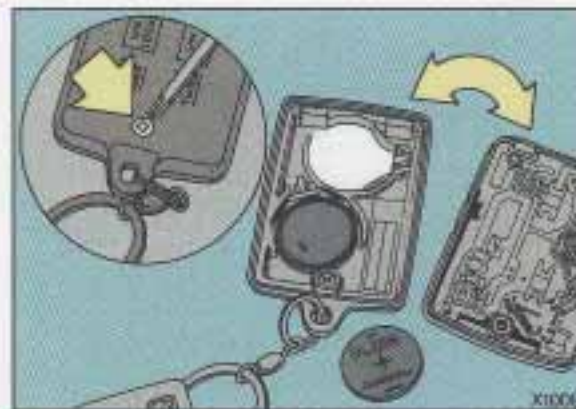

### **Battery Replacement**

Under normal use, the batteries in your key chain transmitter should last about two years.

You can tell the batteries are weak if the transmitter won't work at the normal range in any location. If you have to get close to your vehicle before the transmitter works, it's probably time to change the batteries.

#### **To Replace Batteries in the Remote Lock Control:**

1. Remove the screw from back cover.
2. Lift the front cover off, bottom half first.
3. Remove and replace the two batteries (2016).
4. Reassemble the transmitter.
5. Check the transmitter operation.



## Features & Controls



### **Rear Door Security Locks**

Your Oldsmobile is equipped with rear door security locks that help prevent passengers from opening the rear doors of your vehicle from the inside. To use one of these locks:

1. Move the lever on the door all the way up to the **ENGAGED** position.
2. Close the door.
3. Do the same thing to the other rear door lock.

The rear doors of your vehicle cannot be opened from inside when this feature is in use. If you want to open a rear door when the security lock is on:

1. Unlock the door from the inside.

2. Then open the door from the outside.

If you don't cancel the security lock feature, adults or older children who ride in the rear won't be able to open the rear door from the inside. You should let adults and older children know how these security locks work, and how to cancel the locks.





To cancel the rear door lock:

1. Unlock the door from the inside and open the door from the outside.

2. Move the lever all the way down.
  3. Do the same for the other rear door.
- The rear door locks will now work normally.

## ***Theft***

Vehicle theft is big business, especially in some cities. Although your Oldsmobile has a number of theft-deterrent features, we know that nothing we put on it can make it impossible to steal. However, there are ways you can help.

### **Key in the Ignition:**

If you walk away from your vehicle with the keys inside, it's an easy target for joy riders or professional thieves—so don't do it. When you park your Oldsmobile and open the driver's door, you'll hear a tone reminding you to remove your key from the ignition and take it with you. Always do this. Your steering wheel will be locked, and so will your ignition and transaxle.

## Features & Controls



### ***Theft (CONT.)***

#### **Parking at Night:**

Park in a lighted spot, close all windows and lock your vehicle. Remember to keep your valuables out of sight. Put them in a storage area, or take them with you.

#### **Parking Lots:**


If you park in a lot where someone will be watching your vehicle, it's best to lock it up and take your keys. But what if you have to leave your ignition key? What if you have to leave something valuable in your vehicle?

- Put your valuables in a storage area, like your trunk or glove box.
- Lock the glove box.
- Lock all the doors except the driver's.
- Then take the door key with you.

#### ***PASS-Key II™***

Your vehicle is equipped with the PASS-Key II™ (Personalized Automotive Security System) theft-deterrent system. PASS-Key II™ is a passive theft-deterrent system. This means you don't have to do anything different to arm or disarm the system. It works when you insert or remove the key from the ignition. PASS-Key II™ uses a resistor pellet in the ignition key that matches a decoder in your vehicle.

When the PASS-Key II™ system senses that someone is using the wrong key, it shuts down the vehicle's starter and fuel systems. For about three minutes, the starter won't work and fuel won't go to the engine. If someone tries to start your vehicle again or uses another key during this time, the vehicle will not start. This discourages someone from randomly trying different keys with different resistor pellets in an attempt to make a match.

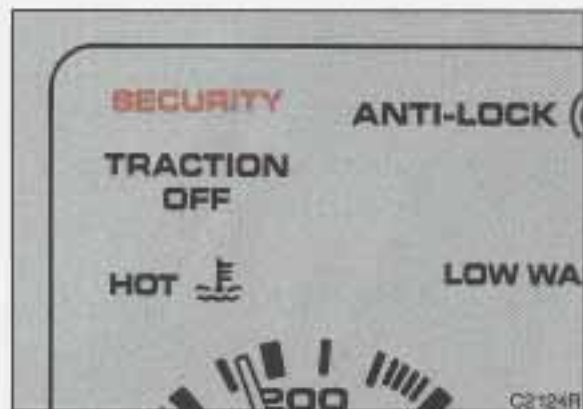

The ignition key must be clean and dry before it's inserted in the ignition or the engine may not start. If the engine does not start and the **SECURITY** light is on, or if you have the information center and you get the **PLEASE CLEAN KEY AND TRY AFTER 3 MINUTES** message, the key may be dirty or wet.

If this happens, turn the ignition off. Clean and dry the key. Wait about three minutes and try again. The security light may remain on during this time. If the starter still won't work, and the key appears to be clean and dry, wait about three minutes and try the other ignition key. At this time, you may also want to check the fuse (see the *Index* under *Fuses & Circuit Breakers*). If the starter won't work with the other key, your vehicle needs service. If your vehicle

does start, the first ignition key may be faulty. See your Oldsmobile dealer or a locksmith who can service the **PASS-Key II™**

If you accidentally use a key that has a damaged or missing resistor pellet, the starter won't work and the **SECURITY** light will flash or, if you have the information center, the **PLEASE CLEAN KEY AND TRY AFTER THREE MINUTES** message will appear. But you don't have to wait three minutes before trying one of the other ignition keys. See your Oldsmobile dealer or a locksmith who can service the **PASS-Key II™** to have a new key made.

If you're ever driving and the **SECURITY** light comes on, or with the information center you get the **PASS-KEY MALFUNCTION** message, you will be able to restart your engine if you turn it off. Your **PASS-Key II™** system, however, is not working properly and must be serviced by your Oldsmobile dealer. Your vehicle is not protected by the **PASS-Key II™** system.


If you lose or damage a **PASS-Key II™** ignition key, see your Oldsmobile dealer or a locksmith who can service **PASS-Key II™** to have a new key made.

### ***Illuminated Entry System (OPTION)***

When you lift the handle of either front door, lights inside your vehicle will go on. These lights will go off after about 20 seconds, or when you start your engine. The lights will also go on when you press any button on the optional Remote Lock Control transmitter. If a door is left ajar, your interior lights will turn off after ten minutes to save your battery.



## Features & Controls

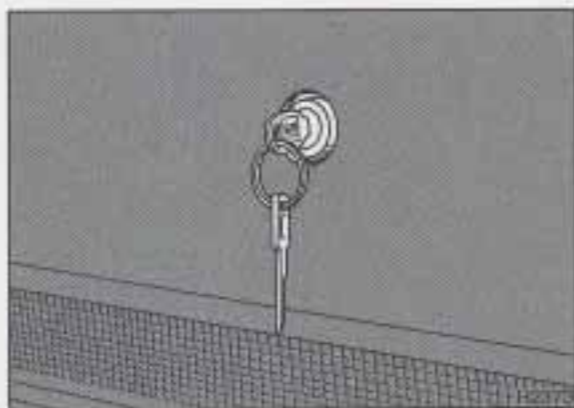

### **Trunk Lock**

To unlock the trunk from the outside, insert the door key and turn it.



### **Remote Trunk Release (OPTION)**

Press the release button located to the left of the steering column to release the trunk lid. The ignition must be on, the Trunk Security override switch in the **UNLOCK** position, and the transaxle in **P** (Park).

The system also works with the Remote Lock Control, and in Retained Accessory Power.



### **Trunk Security Override (OPTION)**

This feature is available with vehicles equipped with Remote Trunk Release. To the left of the glove box, under the glove box door, is an override switch that is useful if you want to leave valuables in the trunk when using a commercial parking lot.

Move the switch to **LOCK** to override the Remote Trunk Release. If you lock your glove box door and take the door key with you (and your Remote Lock Control if so equipped), this will help keep someone from getting into your trunk. Move the switch to **UNLOCK** to again make the Remote Trunk Release usable.



### **Convenience Net (OPTION)**

Your vehicle may have a convenience net. You'll see it just inside the back wall of the trunk.

Put small loads, like grocery bags, behind the net to help keep them from falling over during sharp turns or quick starts and stops.

The net isn't for larger, heavier loads. Store them in the trunk as far forward as you can. You can unhook the net so that it will lie flat when you're not using it.



### **Glove Box**

Use the door key to lock and unlock the glove box. To open, lift the latch release on the left side of the glove box door.

## **New Vehicle "Break-In"**


### **NOTICE**

Your modern Oldsmobile doesn't need an elaborate "break-in." But it will perform better in the long run if you follow these guidelines:

- Don't drive at any one speed—fast or slow—for the first 500 miles (804 km). Don't make full-throttle starts.
- Avoid making hard stops for the first 200 miles (322 km) or so. During this time your new brake linings aren't yet broken in. Hard stops with new linings can mean premature wear and earlier replacement. Follow this "breaking-in" guideline every time you get new brake linings.



## Features & Controls

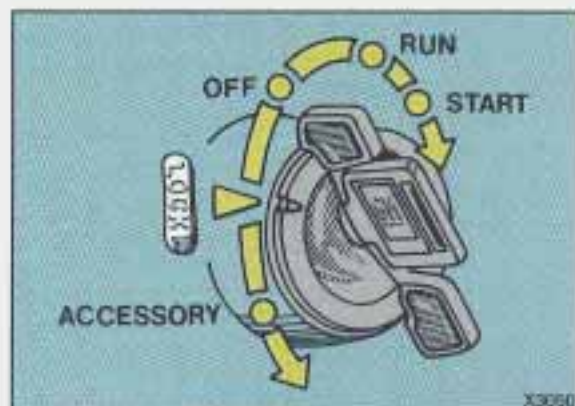

### Ignition Switch

With the ignition key in the ignition switch, you can turn the switch to five positions:

**Accessory:** An “on” position in which you can operate your electrical power accessories. Press in the ignition switch as you turn the top of it toward you.

**Lock:** The only position in which you can remove the key. This locks your steering wheel, ignition and transaxle.

**Off:** Unlocks the steering wheel, ignition, and transaxle, but does not send electrical power to any accessories. Use this position if your vehicle must be pushed or towed, but never try to push-start your vehicle. A warning chime will sound if you open the driver’s door when the ignition is off and the key is in the ignition.

**Run:** An “on” position to which the switch returns after you start your engine and release the switch. The switch stays in the **Run** position when the engine is running. But even when the engine is not running, you can use **Run** to operate your electrical power accessories, and to display some instrument panel warning lights.

**Start:** Starts the engine. When the engine starts, release the key. The ignition switch will return to **Run** for normal driving.

Note that even if the engine is not running, the positions **Accessory** and **Run** are “on” positions that allow you to operate your electrical accessories, such as the radio.

#### Key Reminder Warning:

If you leave your key in the ignition, in the **Off** position, you will hear a warning tone when you open the driver’s door.

**Retained Accessory Power:** If you have the optional Remote Lock Control, after you turn your ignition off and even remove the key, you will still have electrical power to such accessories as the radio, power windows and trunk release for up to 10 minutes. But if you open a door, power is shut off.

### NOTICE

If your key seems stuck in **Lock** and you can’t turn it, be sure it is all the way in. If it is, then turn the steering wheel left and right while you turn the key hard. But turn the key only with your hand. Using a tool to force it could break the key or the ignition switch. If none of this works, then your vehicle needs service.



## Starting Your Engine

Move your shift lever to **P** (Park) or **N** (Neutral). Your engine won't start in any other position—that's a safety feature. To restart when you're already moving, use **N** (Neutral) only.

### NOTICE

Don't try to shift to **P** (Park) if your Oldsmobile is moving. If you do, you could damage the transaxle. Shift to **P** (Park) only when your vehicle is stopped.

1. Don't push the accelerator pedal before starting your engine. In some other vehicles you might need to do this, but because of your vehicle's computer systems, you don't.

2. Turn your ignition key to **Start**.  
When the engine starts, let go of the key. The idle speed will go down as your engine gets warm.
3. If it doesn't start right away, hold your key in **Start** for about three seconds at a time until your engine starts. Wait about 15 seconds between each try to help avoid draining your battery.

### NOTICE

Holding your key in **Start** for longer than 15 seconds at a time will cause your battery to be drained much sooner. And the excessive heat can damage your starter motor.

4. If your engine still won't start (or starts but then stops), it could be flooded with too much gasoline. Try pushing your accelerator pedal all the way to the floor and holding it there as you hold the key in **Start** for about three seconds. If the engine starts briefly but then stops again, do the same thing, but this time keep the pedal down for five or six seconds. This clears the extra gasoline from the engine. After waiting about 15 seconds, repeat the normal starting procedure.



## Starting Your Engine (CONT.)

### NOTICE

Your engine is designed to work with the electronics in your vehicle. If you add electrical parts or accessories, you could change the way the fuel injection system operates. Before adding electrical equipment, check with your dealer. If you don't, your engine might not perform properly.

If you ever have to have your vehicle towed, see the part of this manual that tells how to do it without damaging your vehicle. See the *Index* under *Towing Your Oldsmobile*.

## Driving Through Deep Standing Water

### NOTICE

If you drive too quickly through deep puddles or standing water, water can come in through your engine's air intake and badly damage your engine. If you can't avoid deep puddles or standing water, drive through them very slowly.

## Engine Block Heater (OPTION)

In very cold weather, 0°F (-18°C) or colder, the engine block heater can help. You'll get easier starting and better fuel economy during engine warm-up.

### To Use the Block Heater:

1. Turn off the engine.
2. Open the hood and unwrap the electrical cord.
3. Plug it into a normal, grounded 110-volt outlet.

## CAUTION



Plugging the cord into an ungrounded outlet could cause an electrical shock. Also, the wrong kind of extension cord could overheat and cause a fire. You could be seriously injured. Plug the cord into a properly grounded three-prong 110-volt outlet. If the cord won't reach, use a heavy-duty three-prong extension cord rated for at least 15 amps.

## NOTICE

After you've used the block heater, be sure to store the cord as it was before, to keep it away from moving engine parts. If you don't, it could be damaged.

How long should you keep the block heater plugged in? The answer depends on the weather, the kind of oil you have, and some other things. Instead of trying to list everything here, we ask that you contact an Oldsmobile dealer in the area where you'll be parking your vehicle. The dealer can give you the best advice for that particular area.




## Features & Controls



### ■ *Shifting the Automatic Transaxle*

Your automatic transaxle may have a shift lever located on the steering column or on the console between the seats. Both are shown.

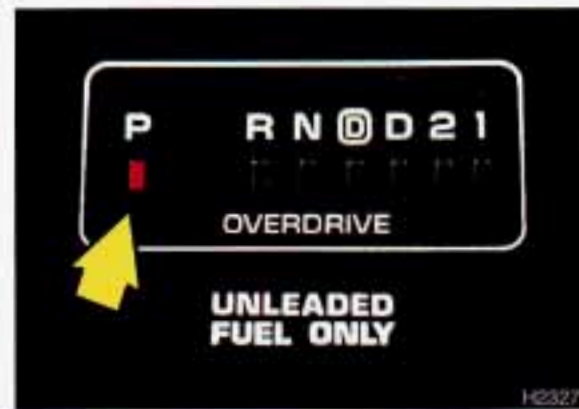

There are several shift positions. In this manual, these are referred to by the commonly used symbols in the right column below:

<b>Park</b>	<b>P</b>
<b>Reverse</b>	<b>R</b>
<b>Neutral</b>	<b>N</b>
<b>Overdrive</b>	<b>D</b>
<b>Drive</b>	<b>D</b>
<b>Second</b>	<b>2</b>
<b>First</b>	<b>1</b>

### *Park*

**P (Park):** This locks your front wheels. It's the best position to use when you start your engine because your vehicle can't move easily.



## CAUTION



It is dangerous to get out of your vehicle if the shift lever is not fully in **P** (Park) with the parking brake firmly set. Your vehicle can roll.

Don't leave your vehicle when the engine is running unless you have to. If you have left the engine running, the vehicle can move suddenly. You or others could be injured. To be sure your vehicle won't move, when you're on fairly level ground, always set your parking brake and move the shift lever to **P** (Park). See the *Index* under *Shifting Into P (Park)*. If you are parking on a hill, or if you're pulling a trailer, also see the *Index* under *Parking on Hills* or *Towing a Trailer*.

Ensure the shift lever is fully in **P** (Park) range before starting the engine. Your Oldsmobile has a brake-transaxle shift interlock. You have to fully **apply** your regular brakes **before** you can shift from **P** (Park) when the ignition key is in the **On** position. If you cannot shift out of **P** (Park), ease pressure on the shift lever—push the shift lever all the way into **P** (Park) and also release the shift lever button on floor shift console models as you maintain brake application. Then move the shift lever into the gear you wish. (Press the shift lever button before moving the shift lever on floor shift console models.) See the *Index* under *Shifting Out of P (Park)*.

## Features & Controls



### Reverse

**R (Reverse):** Use this gear to back up.

#### NOTICE

Shifting to **R** (Reverse) while your vehicle is moving forward could damage your transaxle. Shift to **R** only after your vehicle is stopped.



To rock your vehicle back and forth to get out of snow, ice or sand without damaging your transaxle, see the *Index* under *If You're Stuck: In Sand, Mud, Ice or Snow*.



### Neutral

**N (Neutral):** In this position, your engine doesn't connect with the wheels. To restart when you're already moving, use **N** (Neutral) only. Also, use **N** when your vehicle is being towed.





H2109



H2330



H2110

## CAUTION



Shifting out of **P** (Park) or **N** (Neutral) while your engine is “racing” (running at high speed) is dangerous. Unless your foot is firmly on the brake pedal, your vehicle could move very rapidly. You could lose control and hit people or objects. Don't shift out of **P** (Park) or **N** (Neutral) while your engine is racing.

## NOTICE

Damage to your transaxle caused by shifting out of **P** (Park) or **N** (Neutral) with the engine racing isn't covered by your warranty.

## Forward Gears

**D** (Automatic Overdrive): This position is for normal driving. If you need more power for passing, and you're:

- Going less than about 35 mph (56 km/h), push your accelerator pedal about halfway down.
- Going about 35 mph (56 km/h) or more, push the accelerator all the way down.

You'll shift down to the next gear and have more power.

## NOTICE

If your vehicle seems to start up rather slowly, or if it seems not to shift gears as you go faster, something may be wrong with a transaxle system sensor. If you drive very far that way, your vehicle can be damaged. So, if this happens, have your vehicle serviced right away. Until then, you can use **2** (Second Gear) when you are driving less than 35 mph (56 km/h) and **D** (Overdrive) for higher speeds.

# Features & Controls

## Foward Gears (CONT.)

**D (Third Gear):** This is like **D**, but you never go into Overdrive. Here are some times you might choose **D** instead of **D**:

- When driving on hilly, winding roads.
- When towing a trailer, so there is less shifting between gears.
- When going down a steep hill.

**2 (Second Gear):** This position gives you more power but lower fuel economy. You can use **2** on hills. It can help control your speed as you go down steep mountain roads, but then you would also want to use your brakes off and on.

## NOTICE

Don't drive in **2** (Second Gear) for more than 5 miles (8 km), or at speeds over 55 mph (88 km/h), or you can damage your transaxle. Use **D** or **D** as much as possible.

Don't shift into **2** unless you are going slower than 65 mph (105 km/h), or you can damage your engine.

**1 (First Gear):** This position gives you even more power (but lower fuel economy) than **2**. You can use it on very steep hills, or in deep snow or mud. If the selector lever is put in **1**, the transaxle won't shift into first gear until the vehicle is going slowly enough.

## NOTICE

If your front wheels can't rotate, don't try to drive. This might happen if you were stuck in very deep sand or mud or were up against a solid object. You could damage your transaxle.

Also, if you stop when going uphill, don't hold your vehicle there with only the accelerator pedal. This could overheat and damage the transaxle. Use your brakes or shift into **P** (Park) to hold your vehicle in position on a hill.





## ***Parking Brake***

### **To Set the Parking Brake:**

Hold the regular brake pedal down with your right foot. Push down the parking brake pedal with your left foot. If the ignition is on, the brake system warning light will come on.



### **To Release the Parking Brake:**

Hold the regular brake pedal down. Pull the **BRAKE RELEASE** lever.

If you try to drive off with the parking brake on, the brake light stays on and a chime sounds until you release the parking brake or recycle the ignition.

## **NOTICE**

Driving with the parking brake on can cause your rear brakes to overheat. You may have to replace them, and you could also damage other parts of your vehicle.

### **If You are on a Hill:**

See the *Index* under *Parking on Hills*. That section shows how to turn your front wheels.

### **If You are Towing a Trailer and are Parking on Any Hill:**

See the *Index* under *Towing a Trailer*. That section shows what to do first to keep the trailer from moving.



# Features & Controls

## ■ *Shifting Into P (Park)*

### **CAUTION**



It can be dangerous to get out of your vehicle if the shift lever is not fully in **P** (Park) with the parking brake firmly set. Your vehicle can roll. If you have left the engine running, the vehicle can move suddenly. You or others could be injured. To be sure your vehicle won't move, when you're on fairly level ground, use the steps that follow. If you are parking on a hill, or if you're pulling a trailer, also see the *Index* under *Parking on Hills* or *Towing a Trailer*.

## ***Steering Column Shift Lever***

1. Hold the brake pedal down with your right foot and set the parking brake.

2. Move the shift lever into the **P** (Park) position as follows:
- Pull the lever toward you.





- Move the lever up as far as it will go.
3. Move the ignition key to **Lock**.
  4. Remove the key and take it with you. If you can walk away from your vehicle with the ignition key in your hand, your vehicle is in **P (Park)**.

### ***Console Shift Lever***

1. Hold the brake pedal down with your right foot and set the parking brake.



2. Move the shift lever into the **P (Park)** position as follows:
  - Hold in the button on the lever;
  - Push the lever all the way toward the front of your vehicle.
3. Move the ignition key to **Lock**.
4. Remove the key and take it with you. If you can walk away from your vehicle with the ignition key in your hand, your vehicle is in **P (Park)**.

# Features & Controls

## Leaving Your Vehicle With the Engine Running

### CAUTION



It is dangerous to leave your vehicle with the engine running. Your vehicle could move suddenly if the shift lever is not fully in **P** (Park) with the parking brake firmly set. And, if you leave the vehicle with the engine running, it could overheat and even catch fire. You or others could be injured. Don't leave your vehicle with the engine running unless you have to.

If you have to leave your vehicle with the engine running, be sure your vehicle is in **P** (Park) and your parking brake is firmly set before you leave it. After you've moved the shift lever into the **P** (Park) position, hold the regular brake pedal down. Then, see if you can move the shift lever away from **P** (Park) without first pulling it toward you (or, if you have the console shift lever, without first pushing the button).

If you can, it means that the shift lever wasn't fully locked into **P** (Park).

### Shifting Out of P (Park)

Your Oldsmobile has a brake-transaxle shift interlock. You have to fully **apply** your regular brake **before** you can shift from **P** (Park) when the ignition is in the **On** position. See the *Index* under *Shifting the Automatic Transaxle*.

If you cannot shift out of **P** (Park), ease pressure on the shift lever—push the shift lever all the way into **P** (Park) as you maintain brake application. Then move the shift lever into the gear you wish. (Press the shift lever button before moving the shift lever on floor shift console models.)

If you ever hold the brake pedal down but still can't shift out of **P** (Park), try this:


1. Turn the key to **Off**. Open and close the driver's door to turn off the Retained Accessory Power feature.
2. Apply and hold the brake until the end of step 4.
3. Shift to **N** (Neutral).
4. Start the vehicle and then shift to the drive gear you want.
5. Have the vehicle fixed as soon as you can.






### ***Parking Over Things That Burn***

#### **CAUTION**

 Things that can burn could touch hot exhaust parts under your vehicle and ignite. Don't park over papers, leaves, dry grass or other things that can burn.

### ***Engine Exhaust***

#### **CAUTION**

 Engine exhaust can kill. It contains the gas carbon monoxide (CO), which you can't see or smell. It can cause unconsciousness and death.

You might have exhaust coming in if:

- Your exhaust system sounds strange or different.
- Your vehicle gets rusty underneath.
- Your vehicle was damaged in a collision.
- Your vehicle was damaged when driving over high points on the road or over road debris.
- Repairs weren't done correctly.
- Your vehicle or exhaust system had been modified improperly.

If you ever suspect exhaust is coming into your vehicle:

- Drive it only with all the windows down to blow out any CO; and
- Have it fixed **immediately**.

# Features & Controls

## Running Your Engine While You're Parked

It's better not to park with the engine running. But if you ever have to, here are some things to know.

### CAUTION



Idling the engine with the air system control **OFF** could allow dangerous exhaust into your vehicle (see the earlier **CAUTION** under *Engine Exhaust*).

Also, idling in a closed-in place can let deadly carbon monoxide (CO) into your vehicle even if the fan switch is at the highest setting. One place this can happen is a garage. Exhaust—with CO—can come in easily. **Never** park in a garage with the engine running.

Another closed-in place can be a blizzard. (See the *Index* under *Blizzard*.)

It can be dangerous to get out of your vehicle if the shift lever is not fully in **P** (Park) with the parking brake firmly set. Your vehicle can roll. Don't leave your vehicle when the engine is running unless you have to. If you've left the engine running, the vehicle can move suddenly. You or others could be injured. To be sure your vehicle won't move, even when you're on fairly level ground, always set your parking brake and move the shift lever to **P** (Park).


If you are parking on a hill, or if you're pulling a trailer, also see the *Index* under *Parking on Hills* or *Towing a Trailer*.



## Horn

You can sound the horn by pressing the horn symbols on your steering wheel.



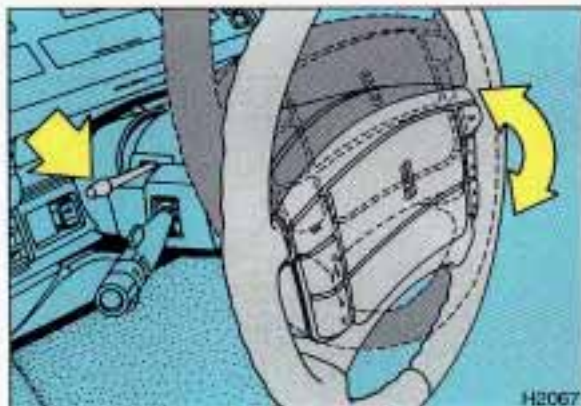

### ***Tilt Steering Wheel***

A tilt steering wheel allows you to adjust the steering wheel before you drive. You can also raise it to the highest level to give your legs more room when you exit and enter the vehicle.

To tilt the wheel, hold the steering wheel and pull the lever. Move the steering wheel to a comfortable level, then release the lever to lock the wheel in place.



### ***Power Windows***

Switches on the driver's armrest control each of the windows when the ignition is on. In addition, each passenger door has a control switch for its own window.

When the driver's window switch is held rearward for more than a half second, the window will lower completely. The window can be opened in smaller amounts by pressing the switch rearward and releasing it immediately.

To stop the window while it is lowering, press the switch again, then release. To raise the window, hold the switch forward.



### ***Window Lock***

Press the right side of the switch to disable all passenger window switches. This is a useful feature when you have children as passengers.



# Features & Controls




## ■ Turn Signal/Headlight Beam Lever

The lever on the left side of the steering column includes your:

- Turn Signal and Lane Change Indicator
- Headlight High-Low Beam
- Windshield Wipers
- Windshield Washer
- Cruise Control (Option)

The High-Low Beam feature is discussed under *Headlights*. See the *Index* under *Headlights*.

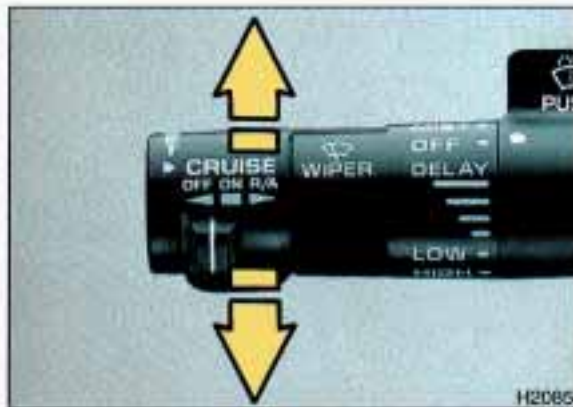


## Turn Signal and Lane Change Indicator

The turn signal has two upward (for Right) and two downward (for Left) positions. These positions allow you to signal a turn or a lane change.

To signal a turn, move the lever all the way up or down. When the turn is finished, the lever will return automatically.


If you leave the turn signal on, a chime will sound after you drive  $\frac{3}{4}$  of a mile.

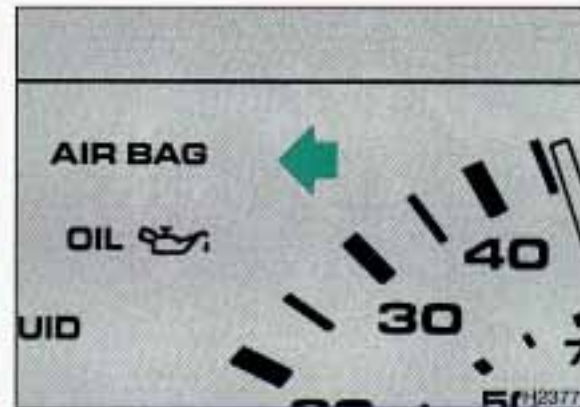

A green arrow on the instrument panel will flash in the direction of the turn or lane change.

To signal a lane change, just raise or lower the lever until the green arrow starts to flash. Hold it there until you complete your lane change. The lever will return by itself when you release it.

As you signal a turn or a lane change, if the arrows don't flash but just stay on, a signal bulb may be burned out and other drivers won't see your turn signal.

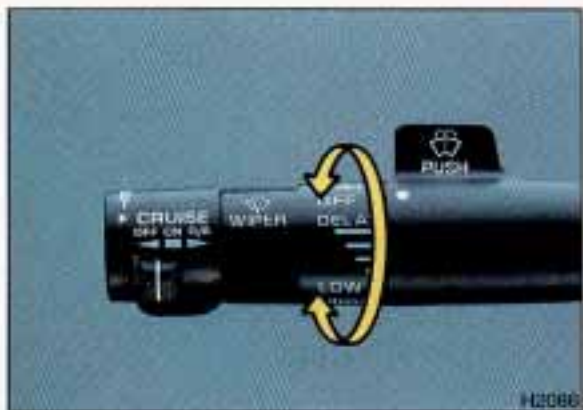

### Windshield Wipers

You control the windshield wipers by turning the band marked **WIPER**.

For a single wiping cycle, turn the band to **MIST**. Hold it there until the wipers start, then let go. The wipers will stop after one cycle. If you want more cycles, hold the band on **MIST** longer.



For steady wiping at low speed, turn the band away from you to the **LOW** position. For high speed wiping, turn the band further, to **HIGH**. To stop the wipers, move the band to **OFF**.

You can set the wiper speed for a long or short delay between wipes. This can be very useful in light rain or snow. Turn the band to choose the delay time. The closer to **LOW**, the shorter the delay.


If a bulb is burned out, replace it to help avoid an accident.

If the green arrows don't go on at all when you signal a turn, check the fuse (see the *Index* under *Fuses & Circuit Breakers*) and for burned-out bulbs.

If you have a trailer towing option with added wiring for the trailer lights, a different turn signal flasher is used. With this flasher installed, the signal indicator will flash even if a turn signal bulb is burned out. Check the front and rear turn signal lights regularly to make sure they are working.




## Features & Controls

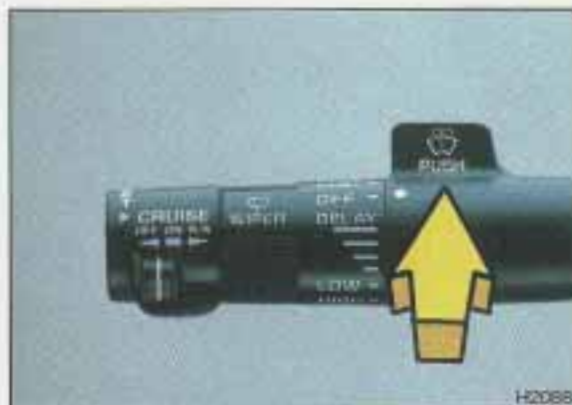

### Windshield Wipers (CONT.)

#### CAUTION

 Damaged wiper blades may prevent you from seeing well enough to drive safely. To avoid damage, be sure to clear ice and snow from the wiper blades before using them. If they're frozen to the windshield, carefully loosen or thaw them. If your blades do become damaged, get new blades or blade inserts.

Heavy snow or ice can overload your wipers. A circuit breaker will stop them until the motor cools. Clear away snow or ice to prevent an overload.

### Windshield Washer

At the top of the turn signal/headlight beam lever there's a paddle with the word **PUSH** on it. To spray washer fluid on the windshield, push the paddle for less than one second. The wipers will clear the window and then either stop or return to your preset speed. For more washer cycles, push and hold the paddle.

If the fluid level in the windshield washer is low, vehicles with the Standard Cluster have a **LOW WASH FLUID** light that will come on. On vehicles with the Electronic Cluster or LSS Cluster, if the fluid level in the windshield washer bottle is low, the message **WASHER FLUID LOW** will appear in the information center. See the *Index* under *Low Washer Fluid Warning*.

#### CAUTION



- Driving without washer fluid can be dangerous. A bad mud splash can block your vision. You could hit another vehicle or go off the road. Check your washer fluid level often.
- In freezing weather, don't use your washer until the windshield is warmed. Otherwise the washer fluid can form ice on the windshield, blocking your vision.



## NOTICE

- When using concentrated washer fluid, follow the manufacturer's instructions for adding water.
- Don't mix water with ready-to-use washer fluid. Water can cause the solution to freeze and damage your washer fluid tank and other parts of the washer system. Also, water doesn't clean as well as washer fluid.
- Fill your washer fluid tank only  $\frac{3}{4}$  full when it's very cold. This allows for expansion, which could damage the tank if it is completely full.
- Don't use radiator antifreeze in your windshield washer. It can damage your washer system and paint.



## ■ Cruise Control (OPTION)

With cruise control, you can maintain a speed of about 25 mph (40 km/h) or more without keeping your foot on the accelerator. This can really help on long trips.

Cruise control does not work at speeds below about 25 mph (40 km/h).

When you apply your brakes, the cruise control shuts off.

## CAUTION



- Cruise control can be dangerous where you can't drive safely at a steady speed. So, don't use your cruise control on winding roads or in heavy traffic.
- Cruise control can be dangerous on slippery roads. On such roads, fast changes in tire traction can cause needless wheel spinning, and you could lose control. Don't use cruise control on slippery roads.

# Features & Controls



## To Set Cruise Control

1. Move the cruise control switch to **ON**.

### CAUTION



If you leave your cruise control switch **ON** when you're not using cruise, you might hit a button and go into cruise when you don't want to. You could be startled and even lose control. Keep the cruise control switch **OFF** until you want to use it.

2. Get up to the speed you want.

3. Push in the **SET** button at the end of the lever and release it. (The **CRUISE** light on the Electronic Cluster and LSS Cluster will come on.)
4. Take your foot off the accelerator pedal.

## To Resume a Set Speed

Suppose you set your cruise control at a desired speed and then you apply the brake. This, of course, shuts off the cruise control. But you don't need to reset it. Once you're going about 25 mph (40 km/h) or more, you can move the cruise control switch from **ON** to **R/A** (which stands for Resume/Accelerate) for about half a second. You'll go right back up to your chosen speed and stay there.

## CAUTION



If you hold the switch at **R/A** longer than half a second, the vehicle will keep going faster until you release the switch or apply the brake. You could be startled and even lose control. So unless you want to go faster, don't hold the switch at **R/A**.

### *To Increase Speed While Using Cruise Control*

There are two ways to go to a higher speed. Here's the first:

1. Use the accelerator pedal to get to the higher speed.
2. Push the button at the end of the lever, then release the button and the accelerator pedal. You'll now cruise at the higher speed.

Here's the second way to go to a higher speed:

- Move the cruise switch from **ON** to **R/A**. Hold it there until you get up to the speed you want, and then release the switch.
- To increase your speed in very small amounts, move the switch to **R/A** for less than half a second and then release it. Each time you do this, your vehicle will go about 1 mph (1.6 km/h) faster.

The accelerate feature will only work after you turn on the cruise control by pushing the **SET** button.



## *Features & Controls*

### ***To Reduce Speed While Using Cruise Control***

There are two ways to reduce your speed while using cruise control:

- Push in the button at the end of the lever until you reach the lower speed you want, then release it.
- To slow down in very small amounts, push the button for less than half a second. Each time you do this, you'll go 1 mph (1.6 km/h) slower.

### ***Passing Another Vehicle While Using Cruise Control***

Use the accelerator pedal to increase your speed. When you take your foot off the pedal, your vehicle will slow down to the cruise control speed you set earlier.

### ***Using Cruise Control on Hills***

How well your cruise control will work on hills depends upon your speed, load, and the steepness of the hills. When going up steep hills, you may have to step on the accelerator pedal to maintain your speed. When going downhill, you may have to brake or shift to a lower gear to keep your speed down. Of course, applying the brake takes you out of cruise control. Many drivers find this to be too much trouble and don't use cruise control on steep hills.



### To Get Out of Cruise Control

There are three ways to turn off the cruise control:


- Step lightly on the brake pedal; OR
- Turn on the traction control switch, if you have this option. When the traction control switch is turned on, it will turn off the cruise control. See the *Index* under *Traction Control*.
- Move the cruise switch to **OFF**. (The **CRUISE** light will go out, if you have it.)

### To Erase Cruise Control Memory


When you turn off the cruise control or the ignition, or shift into **P** (Park), your cruise control set speed memory is erased.



### Headlights

Push the switch marked  to turn on:

- Parking Lights
- Side Marker Lights
- Taillights
- Instrument Panel Lights

Push the  portion of the switch to turn on the headlights, together with:

- Parking Lights
- Side Marker Lights
- Taillights
- Instrument Panel Lights

Push the bottom of the switch (**LIGHTS OFF**) to turn off the lights.

# Features & Controls

## Operation of Lights

Although your vehicle's lighting system (headlamps, parking lamps, fog lamps, side marker lamps and tail lamps) meets all applicable federal lighting requirements, certain states and provinces may apply their own lighting regulations that may require special attention before you operate these lamps. For example, some jurisdictions may require that you operate your lower beam lamps with fog lamps at all times, or that headlamps be turned on whenever you must use your windshield wipers. In addition, most jurisdictions prohibit driving solely with parking lamps, especially at dawn or dusk. It is recommended that you check with your own state or provincial highway authority for applicable lighting regulations.

## Lights On Reminder

If you open the door while leaving the lights on, you will hear a warning tone.



## Cornering Lights (OPTION)

The cornering lights are designed to come on when you signal a turn. This will provide more light for cornering at night.

## Daytime Running Lights (CANADA ONLY)

The Canadian federal government has decided that Daytime Running Lights (DRL) are a useful feature, in that DRL can make your vehicle more visible to pedestrians and other drivers during daylight hours. DRL are required on new vehicles sold in Canada.

Your DRL work with a light sensor on top of the instrument panel. Don't cover it up. The low beam headlights will come on at reduced brightness in daylight when:

- The ignition is on
- The headlight switch is off, and
- The transaxle is not in **P** (Park).



At dusk, the exterior lights will come on automatically and the low beams will change to full brightness. At dawn, the exterior lights will go out and the low beams will change to the reduced brightness of DRL (if the headlight switch is off).

Of course, you may still turn on the headlights any time you need to.

To idle your vehicle with the DRL off, shift the transaxle into **P** (Park). The DRL will stay off until you shift out of **P** (Park).

At night, you can turn off all exterior lights when you are in **P** (Park) by moving the Twilight Sentinel control all the way past **MIN** to turn it off, if it was on. If it was off, move the control to the right to turn it on, then back off. The lights will come back on when you put the transaxle in gear.



### **Headlight High-Low Beam Changer**

To change the headlights from low beam to high or high to low, pull the turn signal lever all the way toward you. Then release it.

When the high beams are on, a blue light on the instrument panel also will be on.



### **Instrument Panel Intensity Control**

You can brighten or dim your instrument cluster lights by rotating the **INTERIOR** control between **LO** and **HI** when your lights are on. Rotate the control all the way past **HI** and you will turn on the interior courtesy lights.

## Features & Controls



### **Front Reading Lights (OPTION)**

These lights and the interior courtesy lights will come on when you open a door. They will turn off when you turn on the ignition, or if the door is left open, they will turn off after about ten minutes.

To turn on the reading lights when the doors are closed, press the lens of the light you want on. Press it again to turn the light off.

To avoid draining your vehicle's battery, be sure to turn off all front and rear reading lights when leaving your vehicle.



### **Sunglasses Storage (OPTION)**

Some models have a storage compartment for glasses in your overhead console. Press the release button to lower the door. Place your glasses inside the door. To close the door, raise it and press it into position.



### **Rear Reading Lights (OPTION)**

These lights go on when you open a door. To turn on a reading light when the doors are closed, press the lens of the light you want on. Press it again to turn the light off.



### ***Inside Manual Day/Night Rearview Mirror***

To reduce glare from lights behind you, pull the lever toward you to the night position.



### ***Electrochromic Day/Night Rearview Mirror (OPTION)***

This mirror automatically changes to reduce glare when set in the **MIN** or **MAX** positions. One photocell on the back of the mirror senses when it is becoming dark outside. Another photocell is built into the mirror surface to sense headlights behind you.

The mirror will darken gradually to reduce glare. This change may take a few moments.



### **Setting the Sensitivity:**

**MIN:** The mirror will gradually reduce glare when headlights behind you are very close. This is a good position for city driving, where there may be light from many sources.

**MAX:** The mirror will begin to gradually reduce glare when headlights are far behind you. This is a good setting for rural driving.

The mirror goes to a clear position whenever you shift to **R** (Reverse).

**OFF:** Shuts off the Day/Night function. The mirror will stay in the Day setting.

To keep the photocells operating well, occasionally clean them with a cotton swab and glass cleaner.




## Features & Controls



### Convex Outside Mirror

Your right side mirror is convex. A convex mirror's surface is curved so you can see more from the driver's seat.

#### **CAUTION**

 If you aren't used to a convex mirror, you can hit another vehicle. A convex mirror can make things (like other vehicles) look farther away than they really are. If you cut too sharply into the right lane, you could hit a vehicle on your right. Check your inside mirror or glance over your shoulder before changing lanes.



### Manual Remote Control Mirrors

The outside rearview mirrors should be adjusted so you can just see the side of your vehicle when you are sitting in a comfortable driving position.

Adjust the driver's side outside mirror with the control lever on the driver's door.



### Power Remote Control Mirrors (OPTION)

The controls on the driver's door armrest control both outside rearview mirrors. Flip the center switch to the left to select the driver side rearview mirror, or to the right to select the passenger side rearview mirror. Then press the control pad to adjust each mirror so that you can just see the side of your vehicle when you are sitting in a comfortable driving position.

To lock the controls, leave the selector switch in the middle position.



### ***Sun Visors***

To block out glare, you can swing down the visors. You can also remove them from the center mount and swing them to the side, while the auxiliary sunshade remains to block glare from the front.



### ***Visor Vanity Mirrors***

#### **Standard Mirror:**

Open the cover to expose the vanity mirror.

#### **Lighted Mirrors:**

If your vehicle has the optional lighted vanity mirrors, the lights come on when you open the cover. These can even be used for reading. You can adjust the brightness of the lights with the switch.



### ***Front Storage Armrest (OPTION)***

The front armrest opens into a storage area for cassette tapes, gloves, etc. To open it, lift the front edge. You can store coins in the removable coin holder, and the dual cup holder flips forward for use.

The cup holder is designed to “break away” should it receive excessive pressure. If it breaks away, snap the edges back into place.

## Features & Controls



### **Front Storage Armrest (LSS ONLY)**

There are two levels of storage in the armrest. To raise the top cover, pull up the front edge.



To open the lower storage compartment, press the release lever under the front edge of the lower cover.



### **Rear Storage Armrest (OPTION)**

To open, fold down the armrest console, press the latch on the underside and pull up the top.

In addition to storage space there is a fold-out cup holder. The cup holder is designed to “break away” should it receive excessive pressure. If it breaks away, snap the edges back into place.





### ***Ashtrays and Lighter***

Pull out the front ashtray to reveal the ashtray and lighter.

To clean the ashtray, open it fully and lift it out by pulling on the snuffer.

To use the lighter, just push it in all the way and let go. When it's ready, it will pop back by itself.

#### **NOTICE**

Don't hold a cigarette lighter in with your hand while it is heating. If you do, it won't be able to back away from the heating element when it's ready. That can make it overheat, damaging the lighter and the heating element.



To clean the rear ashtray, open it, push down on the snuffer and pull out.

#### **NOTICE**

Don't put papers and other things that burn into your ashtrays. If you do, cigarettes or other smoking materials could set them on fire, causing damage.



### ***Accessory Power Outlets (LSS ONLY)***


The power outlets on the center console can be used to plug in electrical equipment such as a cellular telephone, CB radio, etc. Follow the proper installation instructions that are included with any electrical equipment you install.

#### **NOTICE**

When using the accessory power outlet, the maximum load of any electrical equipment should not exceed 15 amps.

# Features & Controls

## Eighty Eight Royale

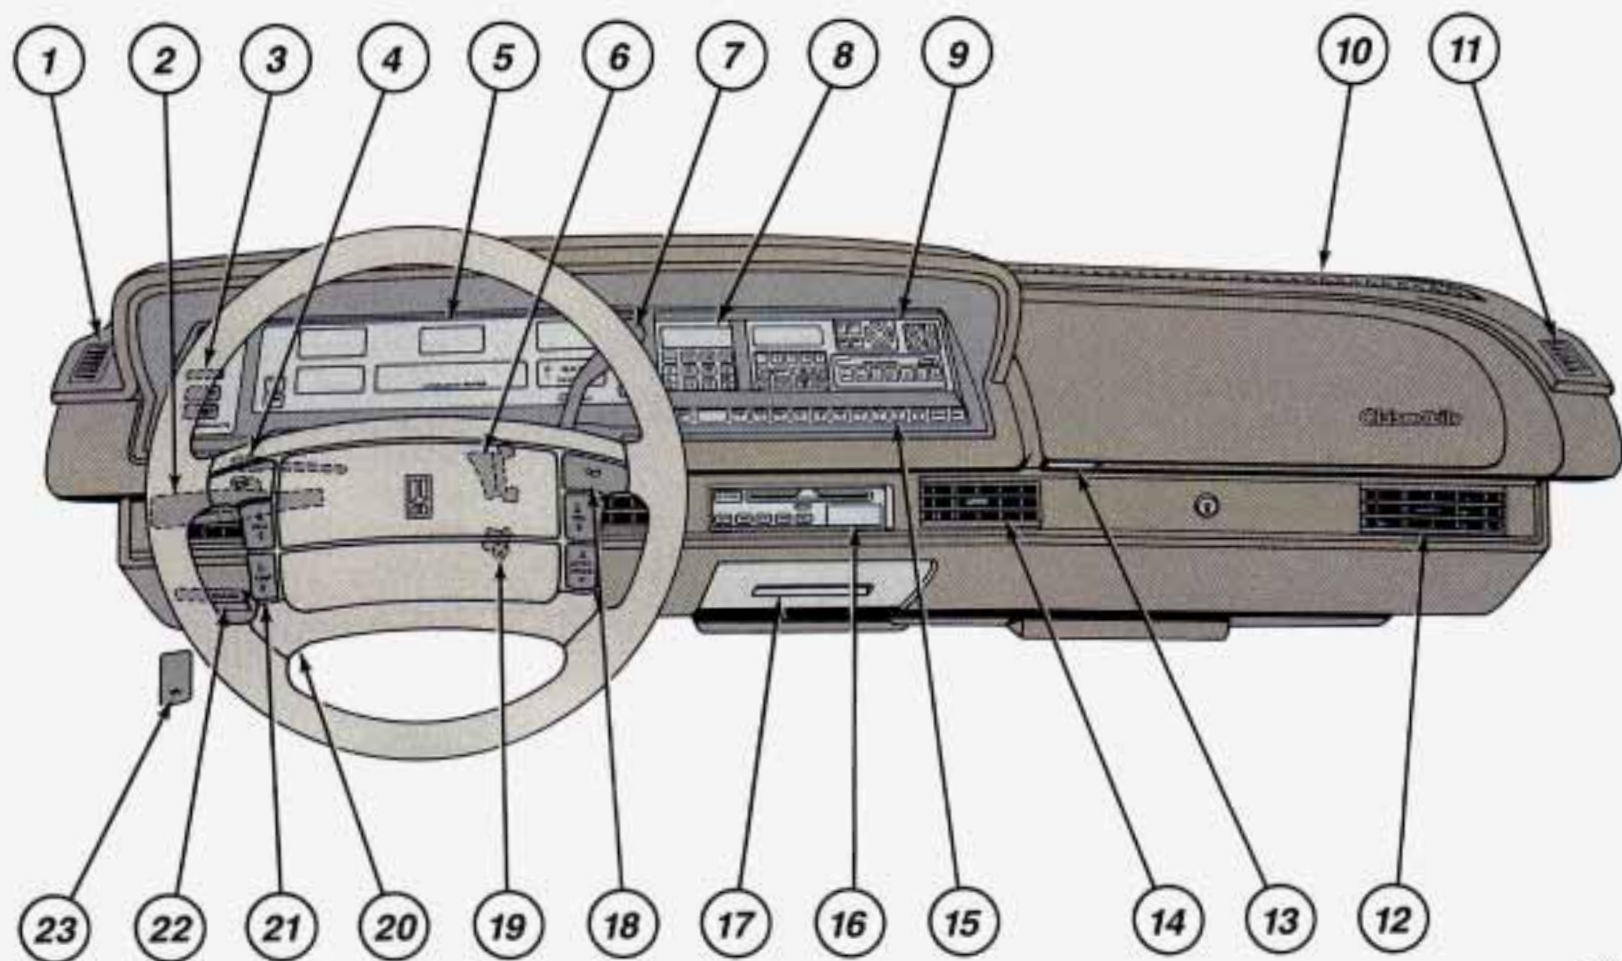

### ***The Instrument Panel— Your Information System***

Your instrument panel is designed to let you know at a glance how your vehicle is running. You'll know how fast you're going, how much fuel you're using, and many other things you'll need to drive safely and economically.


The main components of your instrument panel are:

1. Side Window Vent
2. Turn Signal/Headlight Beam Lever
3. Light Controls
4. Tilt Steering Wheel Lever
5. Instrument Cluster
6. Ignition Switch
7. Gearshift Lever
8. Climate Controls
9. Audio System
10. Defroster Outlets
11. Side Window Vent
12. Upper Air Outlet
13. Glove Box Release
14. Upper Air Outlet
15. Rear Window Defogger/Driver Information Center (Option)
16. Compact Disc Player (Option)
17. Ashtray and Lighter
18. Horn
19. Hazard Warning Flashers Switch
20. Fuse Panel (under instrument panel)
21. Steering Wheel Touch Controls (Option)
22. Parking Brake Release
23. Hood Release



# Features & Controls

## Royale LSS

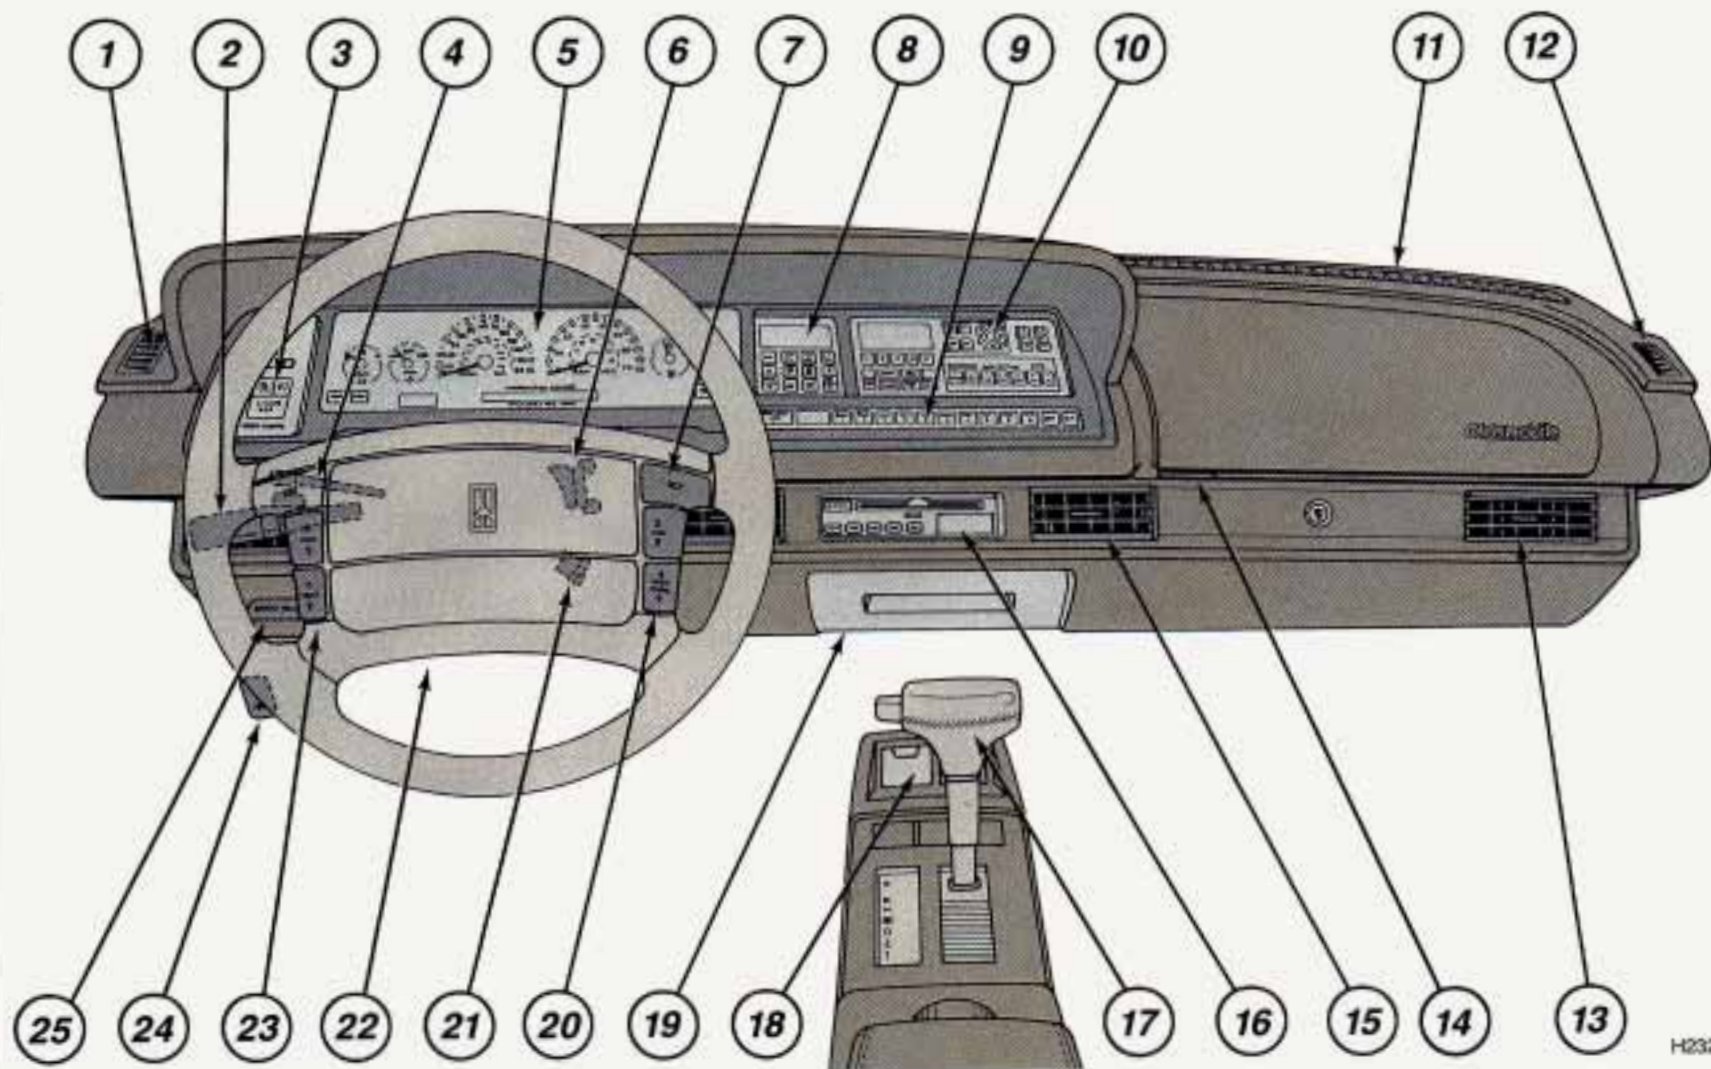

### ***The Instrument Panel— Your Information System***

The instrument panel is designed to let you know at a glance how your vehicle is running. You'll know how fast you're going, how much fuel you're using, and many other things you'll need to drive safely and economically.

The main components of your instrument panel are:

1. Side Window Vent
2. Turn Signal/Headlight Beam Lever
3. Light Controls
4. Tilt Steering Wheel Lever

5. Instrument Cluster/Gages
6. Ignition Switch
7. Horn
8. Climate Controls
9. Rear Window Defogger/Driver Information Center
10. Audio System
11. Defroster Outlets
12. Side Window Vent
13. Upper Air Outlet
14. Glove Box Release
15. Upper Air Outlet

16. CD Player (Option)
17. Gearshift Lever
18. Auxiliary Power Outlets
19. Ashtray and Lighter
20. Steering Wheel Touch Controls for Audio System
21. Hazard Warning Flashers Switch
22. Fuse Panel (under instrument panel)
23. Steering Wheel Touch Controls for Climate Control System
24. Hood Release
25. Parking Brake Release

# Features & Controls

## ■ Instrument Panel Clusters


Your Oldsmobile is equipped with one of these instrument panel clusters, which includes indicator warning lights and gages that are explained on the following pages. Be sure to read about those that apply to the instrument panel cluster for your vehicle.

### STANDARD CLUSTER





## ELECTRONIC CLUSTER

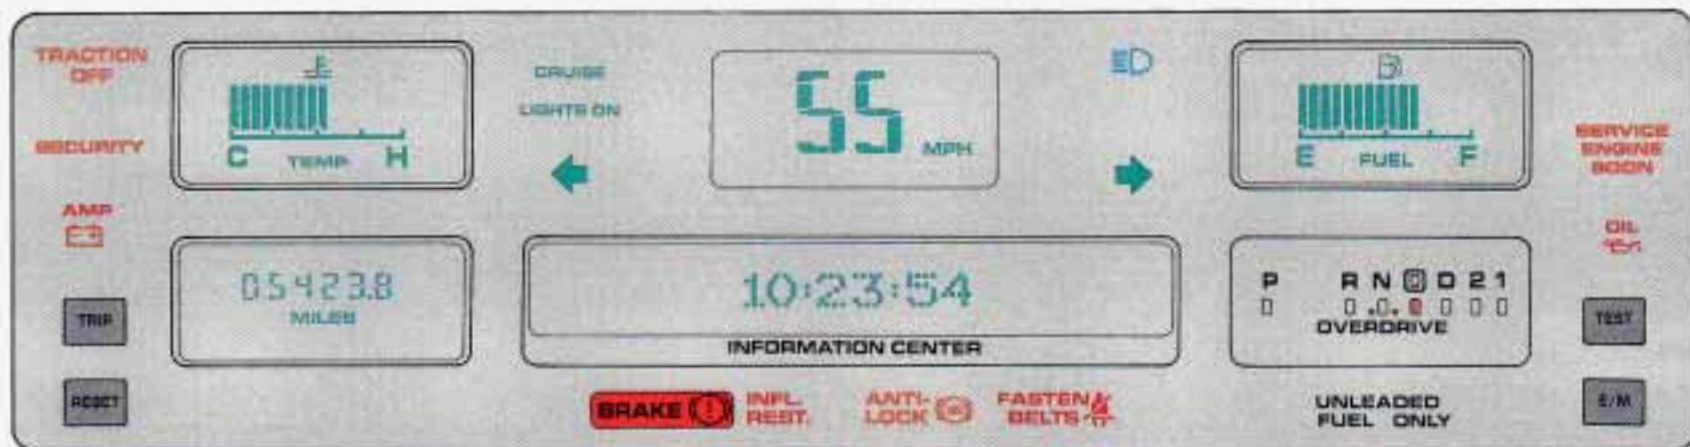

H2318

## ROYALE LSS CLUSTER




C2234

## Features & Controls



### **Speedometer** **(STANDARD CLUSTER)**

Your speedometer lets you see your speed in both miles per hour (mph) and kilometers per hour (km/h).

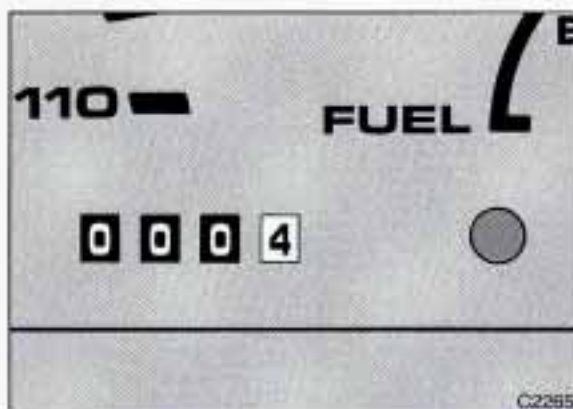


### **Odometer and Trip Odometer** **(STANDARD CLUSTER)**

Your odometer shows how far your vehicle has been driven in either miles (used in the U.S.) or kilometers (used in Canada). Your trip odometer tells how far you have driven since you last reset it. To set it to zero, press the trip button located next to the trip odometer below the fuel gage.



Your Oldsmobile has a tamper resistant odometer. If you see silver lines between the numbers, you'll know someone has probably tampered with it and the numbers may not be true.

You may wonder what happens if your vehicle needs a new odometer installed. If the new one can be set to the mileage total of the old odometer, then it must be. But if it can't, then it's set at zero and a label must be put on the driver's door to show the old mileage reading when the new odometer was installed.

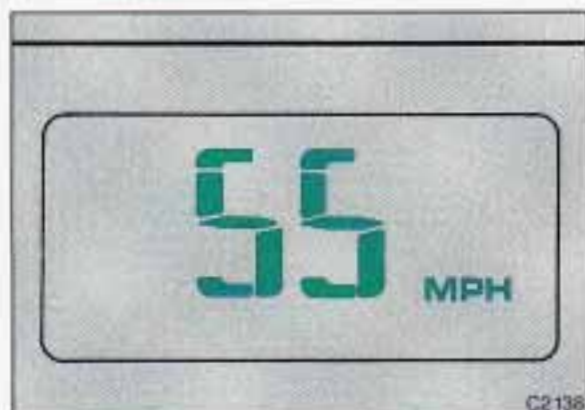

### ***Speedometer*** ***(ELECTRONIC CLUSTER)***

Your speed is displayed in either miles per hour (mph) or kilometers per hour (km/h).

Press the **E/M** (English/Metric) button on the right side of the instrument cluster to switch the display between miles per hour (mph) and kilometers per hour (km/h).



### ***Odometer*** ***(ELECTRONIC CLUSTER)***

Your odometer shows how far your vehicle has been driven in either miles (used in the U.S.) or kilometers (used in Canada).

Your Oldsmobile has a tamper resistant odometer. The odometer will read **ERROR** if someone has tampered with it.

You may wonder what happens if your vehicle needs a new odometer installed. If the new one can be set to the mileage total of the old odometer, then it must be. But if it can't, then it's set at zero and a label must be put on the driver's door to show the old mileage reading when the new odometer was installed.

### ***Trip Odometer*** ***(ELECTRONIC CLUSTER)***

Your trip odometer tells how far you have driven since you last reset it. To set it to zero, display the trip odometer by pressing the **TRIP** button, then press the **RESET** button. Both buttons are located on the left side of the instrument cluster.




## Features & Controls



### **Speedometer (LSS CLUSTER)**

Your speed is displayed in both miles per hour (mph) and kilometers per hour (km/h).

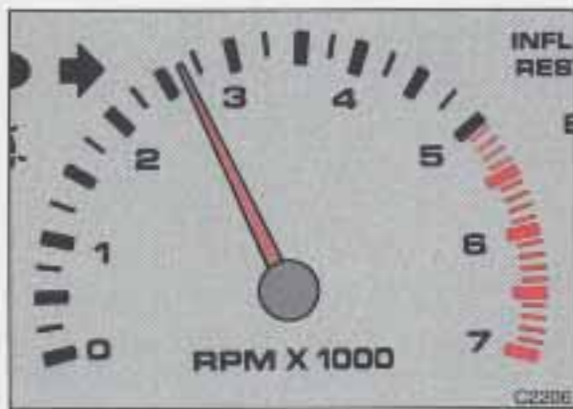


### **Tachometer (LSS CLUSTER)**

Your tachometer displays the engine speed in rpms (revolutions per minute). If your engine speed equals or exceeds the safe limit for operation, the message **ENGINE RPM WARNING** is displayed in the information center.

### **NOTICE**

Do not operate the engine with the tachometer in the red area, or when the message **ENGINE RPM WARNING** is displayed. Engine damage may occur.

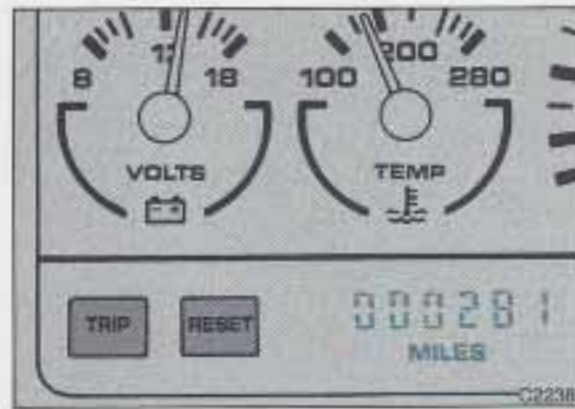


### **Odometer (LSS CLUSTER)**

Your odometer shows how far your vehicle has been driven in either miles (used in the U.S.) or kilometers (used in Canada).

Your Oldsmobile has a tamper resistant odometer. The odometer will read **ERROR** if someone has tampered with it.

You may wonder what happens if your vehicle needs a new odometer installed. If the new one can be set to the mileage total of the old odometer, then it must be. But if it can't, then it's set at zero and a label must be put on the driver's door to show the old mileage reading when the new odometer was installed.

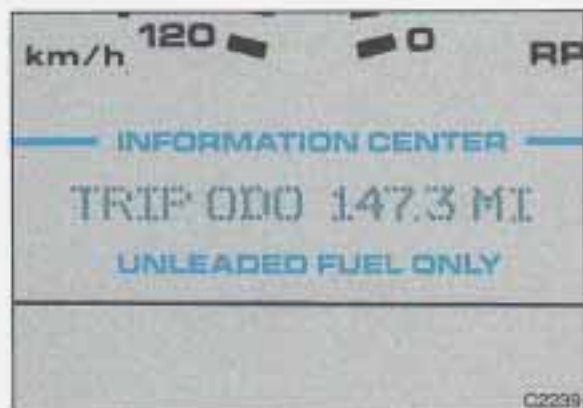


### ***Trip Odometer (LSS CLUSTER)***

Your trip odometer shows how far you have driven since you last reset it. It will be displayed in the Driver Information Center when you press the **TRIP** button. To reset it to zero, first press **TRIP** to display the trip odometer, then press the **RESET** button.

### ■ ***Standard Cluster Gages***

This section explains the fuel and coolant temperature gages for your cluster. Gages can indicate when there may be or is a problem with one of your vehicle's functions. Often gages and warning lights work together to let you know when there's a problem with your vehicle. Also be sure to read about the warning lights with your cluster that are explained later in this part.

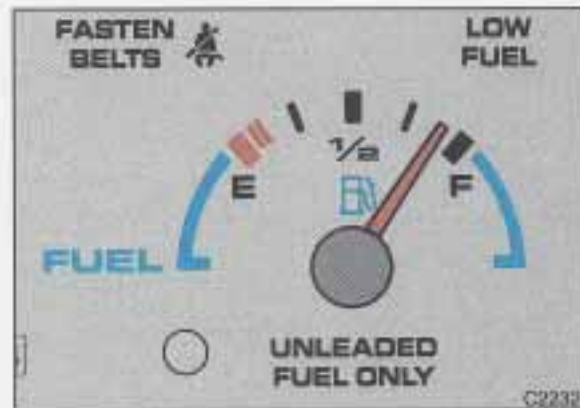

### ***Fuel Gage (STANDARD CLUSTER)***

Your fuel gage tells you about how much fuel you have left, when the ignition is on. When the indicator nears **E** (Empty), some vehicles have an optional low fuel indicator that will go on in the instrument panel. You will have a little fuel left but should get more soon.

Here are four things that some owners ask about. None of these show a problem with your fuel gage:

- At the gas station, the gas pump shuts off before the gage reads **F** (Full).
- It takes a little more or less fuel to fill up than the gage indicated. For example, the gage may have indicated

## Features & Controls



### **Fuel Gage (CONT.)**

the tank was half full, but it actually took a little more or less than half the tank's capacity to fill the tank.

- The gage moves a little when you turn a corner or speed up.
- The gage doesn't go back to **E** when you turn off the ignition.

For your fuel tank capacity, see *Service Station Information* on the last page of this manual.

### **Engine Coolant Temperature Gage (STANDARD CLUSTER)**

This gage shows the engine coolant temperature. If the gage pointer moves into the red warning zone, your engine is too hot!

It means that your engine coolant has overheated. The **HOT** indicator on your instrument cluster will also go on. If you have been operating your vehicle under normal driving conditions, you should pull off the road, stop your vehicle and turn off the engine as soon as possible.


**HOT COOLANT CAN BURN YOU BADLY!**

In *Problems on the Road*, this manual shows what to do. See the *Index* under *Engine Overheating*.

### ■ **Electronic Cluster Gages**

This section explains the fuel and coolant temperature gages for your cluster and how they work together with the messages from your Driver Information Center. Working together, the gages, the warning lights explained later in this section, and the information center messages warn you when there may be or is a problem with one of your vehicle's functions. They can signal that something is wrong before it becomes serious enough to cause an expensive repair or replacement. Heeding your gages and warning messages could also save you or your passengers from injury.



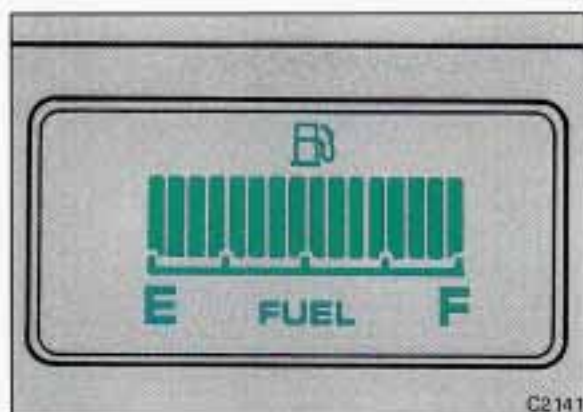

### **Fuel Gage (ELECTRONIC CLUSTER)**

Your fuel gage bars light up when the ignition is on to show you about how much fuel you have left.

When the fourth bar goes off, you have 3 gallons (11 L) of fuel remaining. The message **LOW FUEL** will be displayed and a chime will sound.

Press the **TEST** or **RESET** button to stop the warnings.


When you see one of the warning messages, check the section that tells you what to do about it. Please follow the manual's advice. Waiting to do repairs can be costly—and even dangerous.

To turn off messages except **ENGINE RPM WARNING**, **OIL PRESSURE LOW**, and the engine overheat warnings, press the **TEST** or **RESET** button on the far right of the Driver Information System. Unless the condition causing the warning is corrected, the warning message will appear each time you turn on the ignition.

Here are five things that some owners ask about. None of these show a problem with your fuel gage:

- At the gas station, the gas pump shuts off before the gage reads **F** (Full).
- The top bar does not go out until you have driven a long distance—about 30 miles (48 kilometers).
- It takes a little more or less fuel to fill up than the gage indicated. For example, the gage may have indicated the tank was half full, but it actually took a little more or less than half the tank's capacity to fill the tank.

## Features & Controls

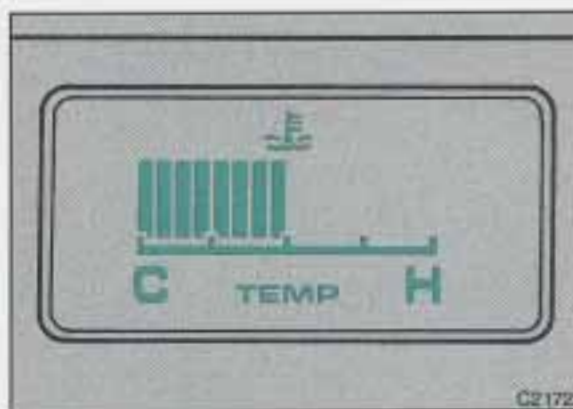

### **Fuel Gage (CONT.)**

- The gage moves a little when you turn a corner or speed up.
- The tank is not necessarily empty when the last bar goes out. There is a 1 to 1.5 gallon (4 to 5.6 L) fuel reserve.

For your fuel tank capacity, see *Service Station Information* on the last page of this manual.

### **Engine Coolant Temperature Gage (ELECTRONIC CLUSTER)**

This gage has bars that show the approximate engine coolant temperature. The temperature will vary with the outside temperature and driving conditions, but the display should normally stay near the center.

If all bars light up, your engine is too hot! It indicates the coolant temperature is about 255°F (124°C). A fast-pulsed chime will sound and the **HOT** indicator will come on. Also, the message **HOT...IDLE ENGINE** will appear in the information center.

If the coolant temperature is over 261°F (127°C), the message **HOT...STOP ENGINE** will appear. It means your engine coolant has overheated. If you have been operating your vehicle under normal driving conditions, you should pull off the road, stop your vehicle and turn off the engine as soon as possible.

**HOT COOLANT CAN BURN YOU BADLY!**

In *Problems on the Road*, this manual shows what to do. See the *Index* under *Engine Overheating*.


If your coolant level is low, the message **COOLANT LEVEL LOW** will appear. Add coolant. See the *Index* under *Engine Coolant*.

## ■ *Royale LSS Cluster Gages*

This section explains the gages for your cluster and how they work together with the messages from your Driver Information System. Working together, the gages, the warning lights explained later in this section, and the information center messages warn you when there may be or is a problem with one of your vehicle's functions. They can signal that something is wrong before it becomes serious enough to cause an expensive repair or replacement. Heeding your gages and warning messages could also save you or your passengers from injury.

When you see one of the warning messages, check the section that tells you what to do about it. Please follow the manual's advice. Waiting to do repairs can be costly—and even dangerous.

To turn off messages except **ENGINE RPM WARNING**, **OIL PRESSURE LOW**, and the engine overheat warnings, press **TEST** or the **RESET** button on the far right of the Driver Information System switchbank. Unless the condition causing the warning is corrected, the warning message will appear each time you turn on the ignition.

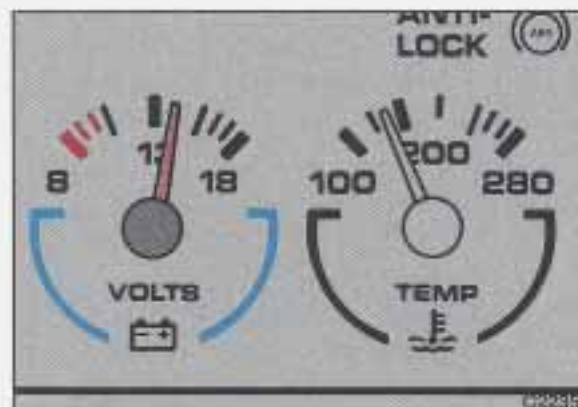


### *Voltmeter (ROYALE LSS)*

Your charging system gage will show the approximate rate of charge when the engine is running. (When the engine is not running, and the ignition is on, the display measures the voltage output of your battery.)

The reading will change as the rate of charge changes (with engine speed, etc.), but readings between the red warning zones indicate the normal operating range. Readings in either red zone indicate a possible problem with your charging system. See your Oldsmobile dealer, especially if the messages **BATTERY VOLTS HIGH**, **BATTERY VOLTS LOW**, or **CHECK CHARGE SYSTEM** appear in the information center.



## Features & Controls

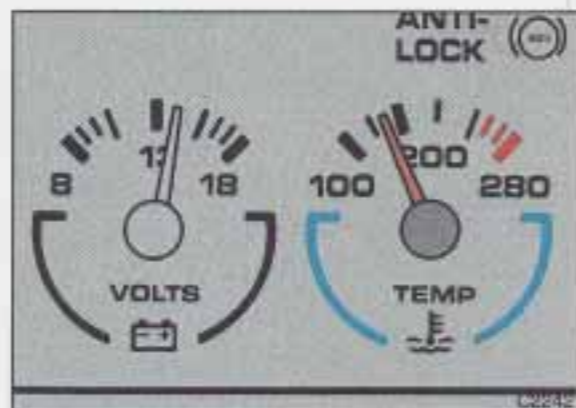

### Engine Coolant Temperature Gage (ROYALE LSS)

This gage shows the engine coolant temperature.


If the gage pointer moves into the red warning zone, your engine is too hot! A fast-pulsed chime will sound and the **HOT** indicator will come on. Also, the message **HOT. . . IDLE ENGINE** will appear in the information center.

If the coolant temperature is over 261°F (127°C), the message **HOT. . . STOP ENGINE** will appear. It means that your engine coolant has overheated. If you have been operating your vehicle under normal driving conditions, you should pull off the road, stop your vehicle and turn off the engine as soon as possible.

**HOT COOLANT CAN BURN YOU BADLY!**

In *Problems on the Road*, the Owner's Manual shows what to do. See the *Index* under *Engine Overheating*.

If your coolant level is low, the message **COOLANT LEVEL LOW** will appear. Add coolant. See the *Index* under *Engine Coolant*.

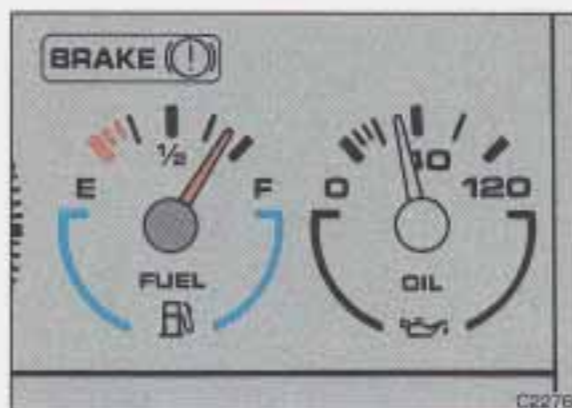

### Fuel Gage (ROYALE LSS)


Your fuel gage tells you about how much fuel you have left, when the ignition is on.

When you have between 2.6 and 3.8 gallons (9-14 L) of fuel remaining, the message **LOW FUEL** will be displayed and a chime will sound.

When fuel range is less than 50 miles (80 km), the message **LOW FUEL RANGE** will be displayed, and a chime will sound.

Press **TEST** or **RESET** to stop each warning.

Here are four things that some owners ask about. None of these show a problem with your fuel gage:

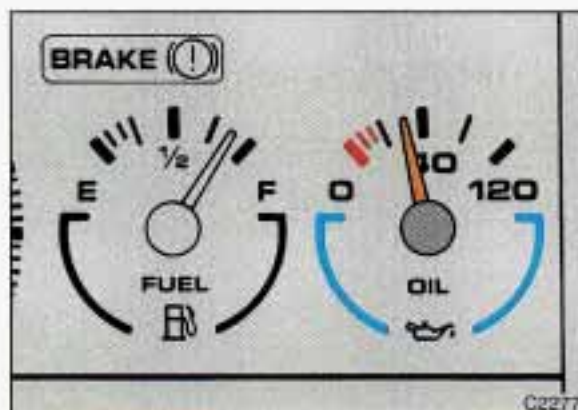

- At the gas station, the gas pump shuts off before the gage reads **F** (Full).
- It takes a little more or less fuel to fill up than the gage indicated. For example, the gage may have indicated the tank was half full, but it actually took a little more or less than half the tank's capacity to fill the tank.
- The gage moves a little when you turn a corner or speed up.
- The tank is not necessarily empty when the pointer is over the **E** mark. There is up to 1.5 gallons (5.6 L) of reserve in the tank.

For your fuel tank capacity, see *Service Station Information* on the last page of this manual.


### **Oil Pressure Gage (ROYALE LSS)**

Your oil pressure gage shows the oil pressure in psi (pounds per square inch) when the engine is running. Oil pressure may vary with engine speed, outside temperature and oil viscosity. In fact, while the engine is warming up, the oil pressure will be higher than at the normal operating temperature. Readings above the red warning zone indicate the normal operating range.

If the gage reads in the red warning zone, a warning chime will sound and the warning message **OIL PRESSURE LOW** will appear in the information center. (To turn the warning off, press **TEST** or **RESET**.) Driving your vehicle with low oil pressure can cause extensive engine damage. If the oil level is low,

the message **CHECK OIL LEVEL** will appear in the information center.

### **CAUTION**

 Don't keep driving if the oil pressure is low. If you do, your engine can become so hot that it catches fire. You or others could be burned. Check your oil as soon as possible and have your vehicle serviced.

### **NOTICE**

Damage to your engine from neglected oil problems can be costly and is not covered by your warranty.



# Features & Controls

## ■ Warning Lights

This section describes warning lights that are available or optional on the Standard Cluster, the Electronic Cluster and the LSS Cluster. Also be sure to read about the warning lights later in this section that apply to your specific cluster. The pictures will help you locate them.

Warning lights and gages can signal that something is wrong before it becomes serious enough to cause an expensive repair or replacement. Paying attention to your warning lights and gages could also save you or others from injury.

Warning lights go on when there may be or is a problem with one of your vehicle's functions. As you will see in the details on the next few pages, some warning lights come on briefly when

you turn the ignition key just to let you know they're working. If you are familiar with this section, you should not be alarmed when this happens.

When one of the warning lights comes on and stays on when you are driving, check the section that tells you what to do about it. Please follow the manual's advice. Waiting to do repairs can be costly—and even dangerous. So please get to know your warning lights and gages. They're a big help.


Your vehicle may also have a Driver Information System that works along with the warning lights and gages. See the *Index* under *Driver Information System*.



## Malfunction Indicator Lamp (Service Engine Soon Light)

A computer monitors operation of your fuel, ignition and emission controls systems. This light should come on when the ignition is on but the engine is not running, as a check to show you it is working. If it does not come on at all, have it fixed right away. If it stays on, or it comes on while you are driving, the computer is indicating that you have a problem. You should take your vehicle in for service soon.



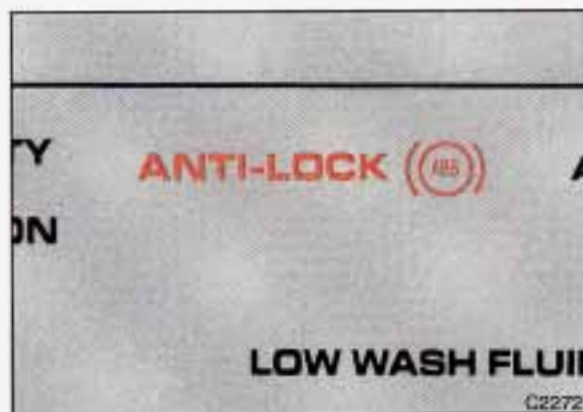

## NOTICE

If you keep driving your vehicle with this light on, after a while the emission controls won't work as well, your fuel economy won't be as good, and your engine may not run as smoothly. This could lead to costly repairs not covered by your warranty.

### ***Anti-Lock Brake System Warning Light***


With anti-lock, this light will go on when you start your engine and may stay on for several seconds or so. That's normal. If the light doesn't come on, have it fixed so it will be ready to warn you if there is a problem.

If the light stays on or comes on when you're driving, stop as soon as possible and turn the key off. Then start the engine to reset the system. If the light still stays on, or if it comes on again while you're driving, your Oldsmobile needs service. Unless the regular brake system warning light is also on, you will still have brakes, but not anti-lock brakes. If the regular

brake system warning light is also on, see the *Index* under *Brake System Warning Light*.

The anti-lock brake system warning light may also come on when you are driving with a compact spare tire. If this happens, the light means you won't have anti-lock until you replace the compact spare with a full-size tire. If the warning light stays on after you replace the compact spare with a full-size tire, or if it comes on again when you're driving, your Oldsmobile needs service.

## Features & Controls

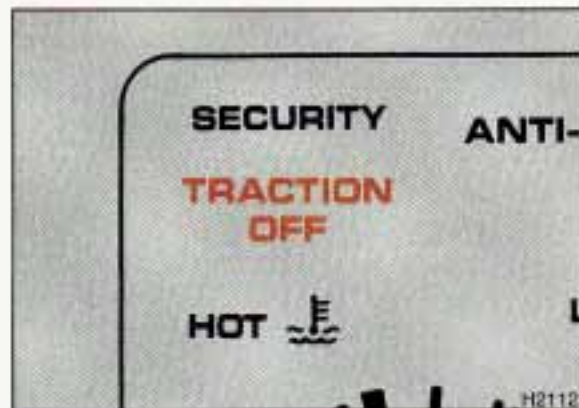

### **Traction Control System Warning Light (OPTION)**

The **TRACTION OFF** warning light means that the system is not working. This warning light may come on for the following reasons:

- If your transaxle overheats, the traction control system automatically shuts off for about three minutes. The warning light will come on and stay on during that time.
- If your brakes overheat, the traction control system will go off and the warning light will come on until your brakes cool down.

- If you turn the system off by pressing the switch to the right of the steering column while the vehicle is stopped, the warning light will come on and stay on. To turn the system back on, bring the vehicle to a stop and press the switch again. The warning light should go off. The system will also turn itself on if you turn your ignition off and back on again.

If the **TRACTION OFF** warning light comes on and stays on for an extended period of time, even when you've switched the system on, your vehicle needs service.

Also see the *Index* under *Traction Control*.

### **CAUTION**



If you let your tires spin at high speed when the **TRACTION OFF** warning light is on, they can explode and you or others could be injured. And, spinning your tires with the **TRACTION OFF** warning light on can cause the transaxle to overheat or can cause other problems. That could cause an engine fire or other damage. When you're stuck, spin the wheels as little as possible. Don't spin the wheels above 35 mph (56 km/h) as shown on the speedometer.




## NOTICE

Spinning your wheels when the **TRACTION OFF** warning light is on can destroy parts of your vehicle as well as the tires. If you spin your wheels too fast while shifting your transaxle back and forth, you can destroy your transaxle. When you're stuck, spin the wheels as little as possible.

### ■ *Standard Cluster Warning Lights*

If you have the Standard Cluster, you have many warning lights that tell you about problems with the important systems of your vehicle. Be sure to read about the warning lights with your cluster.

Also see Malfunction Indicator Lamp (Service Engine Soon Light), Anti-Lock Brake System Warning Light, and Traction Control System Warning Light under *Warning Lights* earlier in this part.

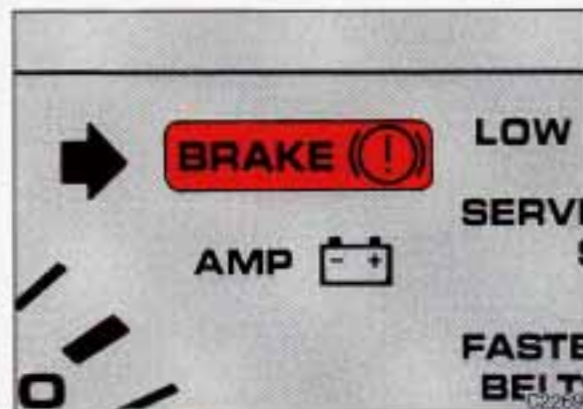

### *Brake System Warning Light (STANDARD CLUSTER)*

Your Oldsmobile's hydraulic brake system is divided into two parts. If one part isn't working, the other part can still work and stop you. For good braking, though, you need both parts working well. If the warning light goes on, there could be a brake problem. Have your brake system inspected right away.

This light should come on as you start the vehicle. If it doesn't come on then, have it fixed so it will be ready to warn you if there's a problem.

This light will also come on when you set your parking brake, and the light will stay on if your parking brake doesn't release fully. If you try to drive off with the parking brake set, a chime



## Features & Controls


### Brake System Warning Light (CONT.)

will also come on until you release the parking brake. If the light and chime stay on after your parking brake is fully released, it means you have a brake problem. If the light and chime come on while driving, pull off the road and stop carefully. You may notice that the pedal is harder to push. Or, the pedal may go closer to the floor. It may take longer to stop. If the light is still on, have the vehicle towed for service. (See the *Index* under *Towing Your Oldsmobile*.)

#### CAUTION




Your brake system may not be working properly if the brake warning light is on. Driving with the brake warning light on can lead to an accident. If the light is still on after you've pulled off the road and stopped carefully, have the vehicle towed for service.

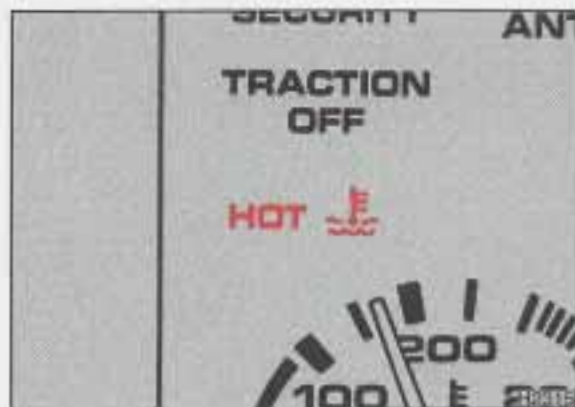

### Engine Coolant Temperature Warning Light (STANDARD CLUSTER)

This light tells you that your engine coolant has overheated or your radiator cooling fans are not working. If you have been operating your vehicle under normal driving conditions, you should pull off the road, stop your vehicle and turn the engine off as soon as possible. **HOT COOLANT CAN BURN YOU BADLY!**

In *Problems on the Road*, this manual shows what to do. See the *Index* under *Engine Overheating*.

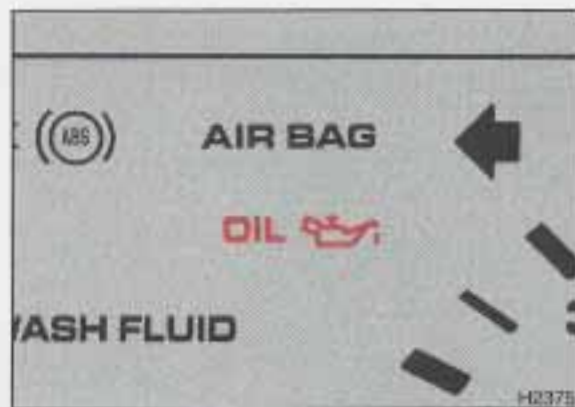

### Oil Warning Light (STANDARD CLUSTER)

If you have a problem with your oil, this light may stay on after you start your engine, or come on when you are driving. A warning chime may also sound. These indicate that oil is not going through your engine quickly enough to keep it cool. The engine could be low on oil, or could have some other oil problem. Have it fixed right away.

The oil light could also come on in other situations:

- When the ignition is on but the engine is not running, the light will come on as a test to show you it is working, but the light will go out when you turn the ignition to **Start**. If it doesn't come on

with the ignition on, you may have a problem with the fuse or bulb. Have it fixed right away.

- If you make a hard stop, the light may come on for a moment. This is normal.


## CAUTION



Don't keep driving if the oil pressure is low. If you do, your engine can become so hot that it catches fire. You or others could be burned. Check your oil as soon as possible and have your vehicle serviced.

## NOTICE

Damage to your engine from neglected oil problems can be costly and is not covered by your warranty.

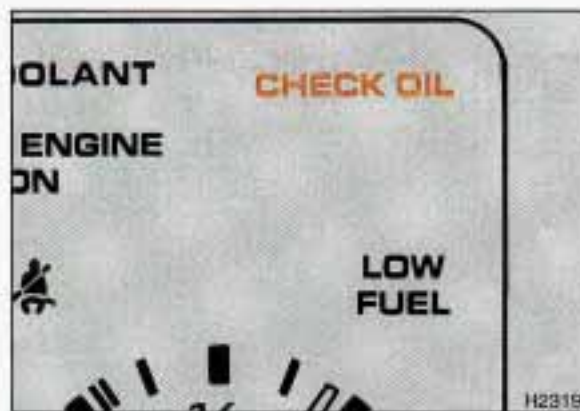

### Check Oil Warning Light (STANDARD CLUSTER)

When this light comes on, it indicates that the engine oil level is 1 to 1½ quarts (.95L to 1.4L) low. It will go on for one to three seconds when the ignition is turned to the **RUN** position, as a bulb check. It will then go off. Even if you have a low oil level, it will go off for 15 to 25 seconds. Then, if the oil level is low, the **CHECK OIL** light will go on for 20 to 40 seconds. If the oil level is okay, the light will remain off.

If the **CHECK OIL** light goes on after the 15 to 25 second delay, check the dipstick level. If it reads low, the engine oil should be brought up to the proper level (see the *Index* under *Engine Oil*). The light will remain off after the engine

oil has been brought to the proper level and the ignition has been off for eight minutes. The eight-minute delay allows the majority of the oil to drain back into the oil pan to prevent a false low condition.

If the ignition is turned on less than 20 seconds after the last ignition cycle, the oil level system will display the information from the previous check. If the ignition is off for more than 20 seconds, but less than eight minutes, the oil level system will only display a bulb check because the oil has not completely drained back into the oil pan. If the ignition is off for more than eight minutes, the system will make a new check of the oil level.




## Features & Controls



### Low Coolant Warning Light (STANDARD CLUSTER)

If this light comes on, your system is low on coolant and the engine may overheat. See the *Index* under *Engine Coolant* and have your vehicle serviced as soon as you can.


The **LOW COOLANT** warning light will also come on when you turn on the ignition, but your engine is not running, as a check to show you it is working. If it doesn't come on then, have it fixed right away.

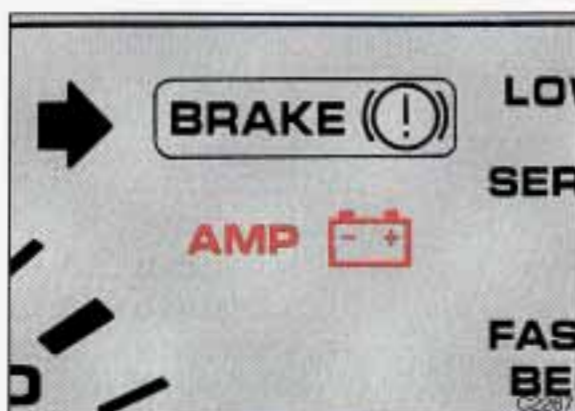

### Battery Warning Light (STANDARD CLUSTER)

This light will come on briefly when you start the vehicle, as a check to show you it is working, then it should go out. If it stays on, or comes on while you are driving, you may have a problem with the electrical charging system. It could indicate that you have a loose generator drive belt, or another electrical problem. Have it checked right away. Driving while this light is on could drain your battery.

If you must drive a short distance with the light on, be certain to turn off all your accessories, such as the radio and climate control.

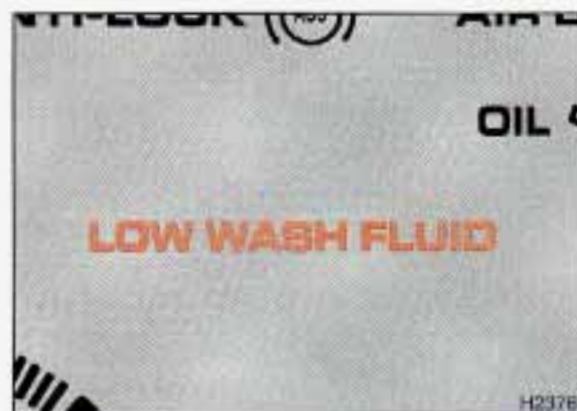

### Low Washer Fluid Warning Light (STANDARD CLUSTER)

The **LOW WASH FLUID** light will come on when your windshield washers are working, or you turn on the ignition, and the fluid container is less than one-third full.

### CAUTION




Driving without washer fluid can be dangerous. A bad mud splash can block your vision. You could collide with another vehicle. Check your washer fluid often.



## ■ *Electronic Cluster Warning Lights*

If you have the Electronic Cluster, many of your warning lights work together with warning messages displayed in the information center. Warning messages will interrupt normal displays. Press the **TEST** or **RESET** button on the far right of the Driver Information System switchbank to stop most warnings and return to normal displays.

**TEST** is also used to monitor previously received messages: If no warning message is currently displayed, press **TEST** to cycle through previously received warnings. But if a new warning occurs, that message will override the cycle. If there were no message warnings, your information center will display **MONITORED SYSTEMS OK**.

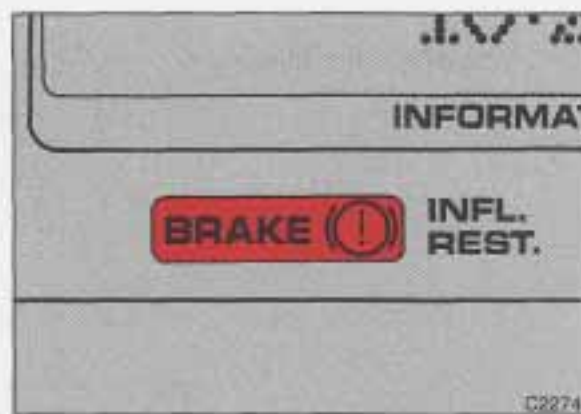

### *Brake System Warning Light (ELECTRONIC CLUSTER)*

Your Oldsmobile's hydraulic brake system is divided into two parts. If one part isn't working, the other part can still work and stop you. For good braking, though, you need both systems working well. If the warning light goes on, there could be a brake problem. If the problem is low brake fluid, the message **BRAKE FLUID LOW** will appear in the information center and a warning chime will sound. Press **TEST** or **RESET** to stop the warning. Have your brake system inspected right away.

This light should come on as you start your vehicle. If it doesn't come on then, have it fixed so it will be ready to warn you if there's a problem.

This light will also come on when you set your parking brake, and the light will stay on if your parking brake doesn't release fully. If you try to drive off with the parking brake set, a chime will sound and the message **PARK BRAKE ON** will appear in the information center until you release the parking brake. You can stop the chime by pressing **TEST** or **RESET**, but the message will remain in the information center. If the light stays on after your parking brake is fully released, it means you have a brake problem. If the light and chime come on while driving, pull

## Features & Controls

### Brake System Warning Light (CONT.)

off the road and stop carefully. You may notice that the pedal is harder to push. Or, the pedal may go closer to the floor. It may take longer to stop. If the light is still on, have the vehicle towed for service. See the *Index* under *Towing Your Oldsmobile*.

#### CAUTION



Your brake system may not be working properly if the brake warning light is on. Driving with the brake warning light on can lead to an accident. If the light is still on after you've pulled off the road and stopped carefully, have the vehicle towed for service.



### Battery Warning Light (ELECTRONIC CLUSTER)

This light will come on briefly when you start the vehicle, as a check to show you it is working, then it should go out. If it stays on, or comes on while you are driving, you may have a problem with the electrical charging system. It could indicate that you have a loose generator drive belt, or another electrical problem. The warning light may be accompanied by the message **BATTERY VOLTS LOW**, or **BATTERY VOLTS HIGH**, or **CHECK CHARGE SYSTEM** in the information center. Have the system checked right away.

Driving while this light is on could drain your battery. If you must drive a short distance with the light on, be certain to turn off all your accessories, such as the radio and air conditioner.



### **Oil Warning Light** (ELECTRONIC CLUSTER)

If you have a problem with your oil, this light may stay on after you start your engine, or come on when you are driving. A warning chime may also sound. These indicate that oil is not going through your engine quickly enough to keep it cool. If the oil level is low, the message **CHECK OIL LEVEL** will appear in the information center. If the oil pressure is low, the message **OIL PRESSURE LOW** will appear. Have your system fixed right away.

The oil light could also come on in three other situations:

- When the ignition is on but the engine is not running, the light will come on as a test to show you it is working, but the light will go out when you turn the ignition to **Start**. If it doesn't come on with the ignition on, you may have a problem with the fuse or bulb. Have it fixed right away.
- Sometimes when the engine is idling at a stop, the light may blink on and off. This is normal.
- If you make a hard stop, the light may come on for a moment. This is normal.

### **CAUTION**



Don't keep driving if the oil pressure is low. If you do, your engine can become so hot that it catches fire. You or others could be burned. Check your oil as soon as possible and have your vehicle serviced.

### **NOTICE**

Damage to your engine from neglected oil problems can be costly and is not covered by your warranty.



### ■ *Royale LSS Cluster* *Warning Lights*

If you have the LSS Cluster, many of your warning lights work together with warning messages displayed in the information center. Warning messages will interrupt normal displays. Press the **TEST** or **RESET** button on the far right of the Driver Information System switchbank to stop most warnings and return to normal displays.

**TEST** is also used to monitor previously received messages: If no warning message is currently displayed, press **TEST** to cycle through previously received warnings. But if a new warning occurs, that message will override the

cycle. If there were no message warnings, your information center will display **MONITORED SYSTEMS OK**.

Also see Malfunction Indicator Lamp (Service Engine Soon Light), Anti-Lock Brake System Warning Light, and Traction Control System Warning Light under *Warning Lights* earlier in this part.

Your vehicle also has a driver information system that works along with the warning lights and gages. See the *Index* under *Driver Information System*.



### *Brake System Warning Light* *(LSS CLUSTER)*

Your Oldsmobile's hydraulic brake system is divided into two parts. If one part isn't working, the other part can still work and stop you. For good braking, though, you need both systems working well. If the warning light goes on, there could be a brake problem. If the problem is low brake fluid, the message **BRAKE FLUID LOW** will appear in the information center and a warning chime will sound. Press **TEST** or **RESET** to stop the warning. Have your brake system inspected right away.

This light should come on as you start the vehicle. If it doesn't come on then, have it fixed so it will be ready to warn you if there's a problem.

This light will also come on when you set your parking brake, and the light will stay on if your parking brake doesn't release fully. If you try to drive off with the parking brake set, a chime will sound and the message **PARK BRAKE ON** will appear in the information center until you release the parking brake. You can stop the chime by pressing **TEST** or **RESET**, but the message will remain. If the light and

chime stay on after your parking brake is fully released, it means you have a brake problem. If the light and chime come on while driving, pull off the road and stop carefully. You may notice that the pedal is harder to push. Or, the pedal may go closer to the floor. It may take longer to stop. If the light is still on, have the vehicle towed for service. (See the *Index* under *Towing Your Oldsmobile*.)

## CAUTION



Your brake system may not be working properly if the brake warning light is on. Driving with the brake warning light on can lead to an accident. If the light is still on after you've pulled off the road and stopped carefully, have the vehicle towed for service.

## Features & Controls



### ■ *Driver Information System* (OPTION)

The Driver Information System provides useful information on:

- Date and Time
- Fuel Economy
- Fuel Remaining/Fuel Used
- Fuel Range
- Average Speed
- Remaining Oil Life and Oil Change Information
- Engine Coolant Temperature
- Tachometer (Engine RPM)
- Battery Voltage
- Distance to Destination
- Estimated Time of Arrival
- Elapsed Time
- Oil Pressure
- Exterior Lamp Outages

### *Control Buttons*

There are 12 buttons that control the functions of the Driver Information System.

**ECON:** Average Fuel Economy and Instantaneous Fuel Economy

**FUEL:** Amount of Fuel Used since last fuel-used reset, and Fuel Remaining.

**RANGE:** Fuel Range

**SPEED:** Average Speed

**OIL:** Oil Life Index and Next Required Oil Change

**GAGES:** Coolant Temperature, Oil Pressure, Tachometer, and Battery Voltage information.

**DEST:** Miles or Kilometers to Destination and Trip Complete messages.

**ETA:** Estimated Time of Arrival and Time to Destination information.

**E/T:** Elapsed Time since last reset.

**DT/TM:** Date and Time of Day

**ENTER/OFF:** This button is used to input numbers and turn off the display.

**RESET:** This button is used with other buttons to reset the system. Press once to enter the reset mode. Press again to abort the reset. It can also be used to stop most warning messages in the information center.





### ***E/M (English/Metric) Button***

Use the E/M button on the instrument panel to change your instrument panel and information center displays between English and Metric measure.

### ***Test Button***

Press to acknowledge, or stop, a message. Also press to cycle through all messages received since the ignition was turned on.

### ***Using the Driver Information System***

When you turn on the ignition, the Driver Information System (DIS) displays one of the following messages for five seconds:

- GOOD MORNING**  
(12:00 AM to 11:59 AM)
- GOOD AFTERNOON**  
(12:00 PM to 5:59 PM)
- GOOD EVENING**  
(6:00 PM to 11:59 PM)

Following this message, the message **MONITORED SYSTEMS OK** will appear for five seconds if there is no problem detected, then the screen will return to the mode displayed before the engine was turned off. The following pages describe how to use all the features of your Driver Information System.

## Features & Controls



### Fuel Economy

The **ECON** button displays average fuel economy and instantaneous fuel economy calculated for your specific driving conditions. Press **ECON** to display average fuel economy, such as:

25.2 AVG MI/GAL or  
9.3 AVG L/100 KM

Press **ECON** again to display instantaneous fuel economy, such as:

28 INST MI/GAL or  
8.4 INST L/100 KM

Press again to return to average fuel economy.

The average fuel economy is viewed as a long term approximation of your driving over all driving conditions.



### Fuel

Press **FUEL** to see how much fuel has been used since you last pressed the reset button. The display will show a reading such as:

10.4 GALLONS USED or  
39.4 LITERS USED

Press **FUEL** a second time to see how much fuel remains. You'll see a display such as:

2.7 GALLONS REMAIN or  
10.2 LITERS REMAIN

To learn how much fuel will be used from a specific starting point, first press **FUEL** to display fuel used, then press **RESET**.

Don't confuse fuel used with the amount of fuel in your tank.

Note that when **0.0 GALLONS (0.0 LITERS)** is displayed, you have reached the fuel tank reserve capacity. The amount of fuel remaining will range from 0 to 1 gallon (0 to 3.7 L).



### ***Fuel Range***

Fuel range calculates the remaining distance you can drive without refueling. It's based on fuel economy and the fuel remaining in the tank. Press **RANGE** to display fuel range, such as:

FUEL RANGE 235 MI or  
FUEL RANGE 378 KM



### ***Average Speed***

The calculation for average speed begins when **SPEED** is reset. Press **SPEED** to display the average speed, such as:

AVG SPEED 56 MPH or  
AVG SPEED 90 KM/H

To reset the average speed, press **SPEED** and then **RESET**.



### ***Oil Change Reminder***

Press the **OIL** button for information on engine oil life, such as:

OIL LIFE 84%

This is an estimate of the oil's remaining useful life. It will show 100% when the system is reset after an oil change. The system then predicts remaining oil life using inputs from coolant temperature, engine rpm and vehicle speed. It will alert you to change oil on a schedule consistent with your vehicle's driving conditions.



## Features & Controls



### ***Oil Change Reminder (CONT.)***

When remaining oil life is 10% or less, the system will calculate the approximate distance to the next oil change. Then, when you first start the vehicle each day, a tone will sound and the display will show the approximate distance to the next oil change, such as:

**CHANGE OIL 155 MI or  
CHANGE OIL 250 KM**



The distance will go down as you continue driving. When the oil life is zero a tone will sound and the display will show:

### **CHANGE OIL NOW**

To reset the oil life display after each oil change:

- 1.** With the ignition on, press the **TEST** or **RESET** button and release it.
- 2.** Press the **OIL** button and release it. The oil life status should be displayed.
- 3.** Press **RESET** and hold it for at least five seconds.

This will reset the **OIL LIFE** to 100%.

Be careful not to reset the **OIL LIFE** accidentally at any time other than when the oil has just been changed. It can't be reset accurately until the next oil change.

The Driver Information System does not replace the need to maintain your vehicle as recommended in the Maintenance Schedule in this manual. Also, the Oil Change Reminder will not detect dusty conditions or engine malfunctions that may affect the oil. If you drive in dusty areas, change your oil after every 3,000 miles (5 000 km) or three months, whichever comes first, unless the DIS instructs you to do so sooner. Also, the Oil Change Reminder does not measure how much oil you have in your engine. So, be sure to check your oil level often. See the *Index* under *Engine Oil*.



### **Check Oil Level Warning**

If the engine oil level is 1 to 1½ quarts (.95L to 1.4L) low, the display will show:

**CHECK OIL LEVEL**

The message appears only if the engine is running. If the message appears, check the oil dipstick level. If it reads low, your oil level should be brought up to the proper level (see the *Index* under *Engine Oil*). After bringing the oil to the proper level, the ignition must be off for eight minutes to allow the majority of oil to drain into the oil pan.



### **Gages**

Pressing this button will display coolant temperature, such as:

**COOLANT 204°F or  
COOLANT 95.4°C**

If the coolant temperature is too hot, the coolant temperature warning messages will appear in the information center (see *Coolant Temperature Gage* earlier in this section).

Pressing **GAGES** again will display the oil pressure, such as:

**OIL PRESSURE 50 PSI**

Pressing **GAGES** again will display battery voltage, such as:

**BATTERY 14.7 VOLTS**

Pressing **GAGES** again will display the tachometer, such as:

**TACHOMETER 2550 RPM**

All displays are continuously updated.

## Features & Controls



### ***Distance to Destination***

This feature acts as a reverse trip odometer by counting backward from an estimated distance which you enter before starting your trip. It also uses that information to determine the estimated time of arrival.

To set, press **DEST**, then **RESET** and enter a maximum of four digits for the length of your trip. (Always use whole miles or kilometers.) Then press **ENTER**. You can enter as many digits as possible, but the system will only accept the last four digits you enter as your distance to destination.

The system will display the total distance to destination, such as:

**365 MI TO DEST** or  
**587 KM TO DEST**

When the system counts down to zero distance remaining, even if you're in another display, a tone will sound and the display will show:

**TRIP COMPLETE**

The trip complete message will go off when you press the **TEST** or **RESET** button, or when you turn your ignition off, then on. The display returns to the mode displayed prior to the interruption.



### ***Estimated Time of Arrival (ETA)***

**ETA** is based on the average speed, the date and time of the day, and the estimated distance to your destination.

After you have entered your distance to destination, press **ETA** to display estimated time of arrival, such as:

**ETA TUE 12:56 PM**

Press **ETA** again to display the time to destination. The display will show the current time as the hours and minutes to destination, such as:

**12:50 TIME TO DEST**



If the time to destination calculation is 7 days or greater, the display will read:

**TRIP OVER 7 DAYS**

When the trip is complete a tone will sound and the display will show:

**TRIP COMPLETE**

The trip complete message will go off when you press the **TEST** or **RESET** button, or when you turn your ignition off, then on. The display returns to the mode displayed prior to the interruption.



### ***Elapsed Time (E/T)***

When the ignition is on, the Driver Information System can be used as a stopwatch. The display will show hours, minutes, and seconds. The elapsed time indicator will record up to 100 hours, then it will reset to zero and continue counting. Press **E/T**, and the display will show the amount of time that has elapsed since the elapsed time indicator was last reset (not including time the ignition is off), such as:

**01:08:25 ELAPSED**

To reset elapsed time to zero, press **RESET** while the elapsed time is displayed.



### ***Date and Time***

#### **To Display and Set the Date:**

To display the date, press **DATE/TIME**. To change the date while a date is displayed, press **RESET**. The following display will appear:

**MONTH? MM/DD/YY**

You will have 15 seconds to make each entry. Notice that each key has a number. Push the key to enter that number. Enter the month first, then the day, then the year. (When setting the month and the day for the 1st through the 9th, first enter a zero: 01 for January, 02 for February, etc.) The first **M** will flash until you enter the first digit. The second **M** will flash until you enter the second digit.

## Features & Controls



### ***Date and Time (CONT.)***

When you finish entering the month, the display will change to:

**DAY? MM/DD/YY**

Set day just as you set month. After the day entry is made, the display will change to:

**YEAR? MM/DD/YY**

Set year just as you set month and day. If a valid date is entered, the display will automatically exit to the date mode. It will change to **TIME RESET** after a battery reconnect (loss of power). If an invalid date is entered, the display will change to the beginning of date reset.

### **To Display and Set the Time:**

Press **DATE/TIME** while the date is shown to display the time for five seconds.

The time can be reset immediately after the date has been reset by pressing **RESET** while the time is displayed. You will have 60 seconds to make each entry.

Entering the time is similar to entering the date, but first the display will change to:

**AM (1) PM (2)**


Select **1** for AM or **2** for PM.

Then the display will change to the time setting:

**HOUR? HH:MM**

**MINUTE? HH:MM**

Like the **DATE** entry, the **H**'s and the **M**'s will flash until you enter a digit. When you enter the hour and minute, the time is set.

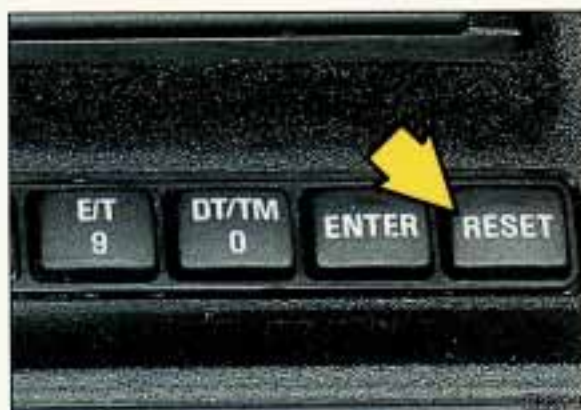

### ***Trip Reset***

You can reset all of the trip features to zero at the same time by pressing the **RESET** button for the Driver Information System and holding it for five seconds while in any of the following display modes:

- Fuel Economy
- Fuel Used
- Elapsed Time
- Average Speed

When you complete a trip reset the display will read **TRIP FUNCTION RESET** for five seconds and then return to whatever display you were in. You must acknowledge the message by pressing the **TEST** or **RESET** button.

### ***Engine Speed Warning***

If your engine speed equals or exceeds the safe limit for operation, the message **ENGINE RPM WARNING** is displayed in the information center.

#### ***NOTICE***

Do not operate the engine at engine speeds displaying the **ENGINE RPM WARNING**. Engine damage may occur.



# Features & Controls

## Other Information Center Messages

The following messages in your information center mean that you could have a problem with your vehicle's electronic systems. See your dealer as soon as possible.

**ECM DATA LINK PROB**  
**COOLANT SENDER PROBLEM**  
**FUEL SENDER PROBLEM**  
**OIL PRES SENDER PROB**

For information on bulb out messages, see the *Index* under *Replacement Bulbs*.

## Canadian & Export Vehicles Only

A message will appear in the information center, in English, for two seconds and then the numeric equivalent will appear for two seconds.

MESSAGE	NO.	MESSAGE	NO.
COOLANT SENDER PROB	2	CHECK OIL LEVEL	48
PASS KEY MALFUNCTION	3	OIL PRESSURE LOW	51
TRAC CONTROL ACTIVE	5	ECM DATA LINK PROB	54
BACK-UP LAMP OUT	8	PARK BRAKE ON	55
BATTERY VOLTS HIGH	9	PASSENGER DOOR AJAR	56
BATTERY VOLTS LOW	10	ENGINE RPM WARNING	57
BRAKE FLUID LOW	12	REAR DOOR AJAR	58
CENTER STOP LAMP OUT	15	REAR LAMP OUT	59
CHANGE OIL NOW	16	REAR STOP LAMP OUT	60
CHANGE OIL xxxx KM	17	REAR TURN LAMP OUT	61
CHANGE OIL xxx MI	18	TAIL LAMP OUT	66
COOLANT LEVEL LOW	19	TRIP COMPLETE	68
DRIVER DOOR AJAR	26	PLEASE CLEAN KEY AND TRY AFTER 3 MINUTES	71 72
FRONT PARK LAMP OUT	28	WASHER FLUID LOW	73
FRONT TURN LAMP OUT	29	OIL PRES SENDER PROB	91
CHECK CHARGE SYSTEM	33	FUEL SENDER PROBLEM	92
HIGH BEAM LAMP OUT	37	DASH CLOCK FAILURE	96
HOT. . . IDLE ENGINE	38	GOOD DAY	97
HOT. . . STOP ENGINE	39	DATE NOT AVAILABLE	98
LOW BEAM LAMP OUT	41	TIME NOT AVAILABLE	99
LOW FUEL	42		
LAMP MON LINK PROB	44		



## *Part 3*

# *Comfort Controls & Audio Systems*

**In this part you'll find out how to operate the comfort control systems and audio systems offered with your Oldsmobile. Be sure to read about the particular system supplied with your vehicle.**

Four Season Climate Control . . . . .	128
Automatic Electronic Climate Control . . . . .	131
Setting the Clock . . . . .	136
AM/FM Stereo Radio . . . . .	137
AM/FM Stereo Radio with Cassette Tape Player . . . . .	138
AM/FM Stereo with Cassette Player and Graphic Equalizer . . . . .	140
Compact Disc Player . . . . .	142
Steering Wheel Touch Controls . . . . .	143
Understanding Radio Reception . . . . .	143
Care of Your Cassette Tape Player . . . . .	144
Care of Your Compact Discs . . . . .	145
Antenna Mast Care . . . . .	145


## Comfort Controls & Audio Systems



### ■ *Four Season Climate Control*

The air conditioner and heater work best if you keep your windows closed while using them. Your vehicle also has the flow-through ventilation system described later in this section.

**Temperature Control:** This lever changes the temperature of the air coming through the system.

 : Selects the force of air you want. Press **HIGH** to raise the fan speed. Press **LOW** to lower the fan speed. The fan is always running unless the selector switch is moved to **OFF**.

### *Air Conditioning*

The selector switch has three air conditioner settings. On very hot days, open the windows long enough to let hot inside air escape. This reduces the time your air conditioner's compressor will have to run, which should help fuel economy.

**MAX:** Provides maximum cooling or quick cool-down on very hot days. This setting recirculates much of the air

inside your vehicle, and it should not be used for long periods because the air may become too cold and dry.

**NORM:** Use for normal cooling on hot days. This setting cools outside air and directs it through the instrument panel outlets.

**BI-LEV (Bi-level):** Use on cool, but sunny days. This setting brings in the outside air, but directs it in two ways. The cool air is directed to the upper portion of your body through the instrument panel outlets, but warmed air is directed through the heater ducts and defroster vents. At times this temperature difference may be more apparent than others.



The air conditioner compressor operates in all three air conditioner positions, and in **DEFOG** and **DEF** (Defrost) when the outside temperature is above freezing. When the air conditioner is on, you may sometimes notice slight changes in your vehicle's engine speed and power. This is normal, because the system is designed to cycle the compressor on and off to keep the desired cooling and help fuel economy.

### **Ventilation**

For mild outside temperatures, when little heating or cooling is needed, set the selector switch to **VENT**. Air flow is through the instrument panel outlets. Set the temperature control lever to the temperature desired.

### **Heating**

When outside temperatures are cold, setting the selector switch to **HEAT** and the temperature control lever toward **WARM** will send heated air through the heater ducts, and some through the defroster vents.

### **Defogging**

Use on cold, humid days with two or more passengers when the windows fog. The air is directed through the heater, defrost, and side window vents.

### **Defrosting**

The **DEF** setting directs most air through the defroster vents, and some through the heater ducts.




### **Defogging Windows with Four Season Climate Control**

Slide the temperature control lever to the far right.

To quickly defog the windshield, set the selector switch to **DEF** and the fan control to **HIGH**.

## Comfort Controls & Audio Systems

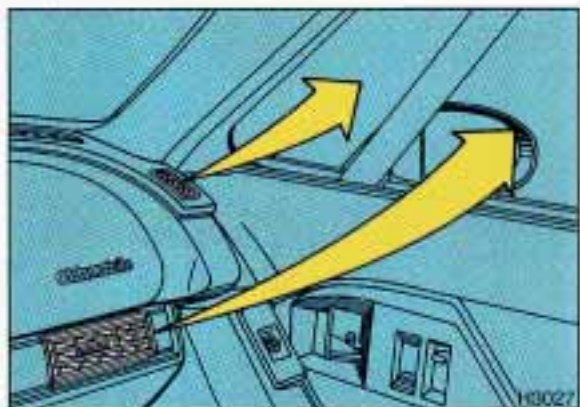

### **Defogging Windows with Four Season Climate Control (CONT.)**

To defog the side windows, set the selector switch to **BI-LEV** and the fan control to **HIGH**. Aim the side vents toward the side windows. For increased air flow to the side vents, close the center vents.



### **Rear Window Defogger (OPTION)**

**REAR DEFOG:** Press to warm the defogger grid on the rear window. The indicator light will glow while the rear window defogger is operating. The rear window defogger will turn off automatically after about 10 minutes of use. If you turn it on again, the defogger will operate for about five minutes only. You can also turn the defogger off by turning off the ignition or pressing the **REAR DEFOG** switch again.

Do not attach a temporary vehicle license across the defogger grid on the rear window.

### **NOTICE**

Don't use a razor blade or something else sharp on the inside of the rear window. If you do, you could cut or damage the warming grid, and the repairs wouldn't be covered by your warranty.






### ■ *Automatic Electronic Climate Control (OPTION)*

With this system, you can control the ventilation, heating and air conditioning in your vehicle, or you can use the automatic setting. Your vehicle also has the flow-through ventilation system described later in this section.

The digital screen displays the outside temperature or the inside temperature setting, the fan speed, and the heating mode you have selected. It will also

display  when the air conditioner compressor is operating.

The air conditioner compressor operates in all modes except heating. However, when the outside temperature is below 40°F (4°C), the compressor will not operate. When the air conditioner is on, you may sometimes notice slight changes in your vehicle's engine speed and power. This is normal, because the system is designed to cycle the compressor on and off to keep the desired cooling and help fuel economy.

**TEMP:** Sets the interior temperature you want. The temperature you set will be displayed on the digital screen for ten seconds after any of the control buttons are pressed. Then the outside temperature will be displayed.

Once you set the temperature, the system will try to maintain that set temperature, whether you are in the auto or manual modes. But if you set the

temperature for 60°F (16°C) or 90°F (32°C), the fan will stay on high speed unless you select a different speed. The system will maintain full cold or full hot operation at these extreme temperature settings.

Your system has a sun sensor on top of the instrument panel that detects direct sunlight and the increased warming caused by it. To keep you comfortable, it may reduce the interior temperature by as much as 5°F (3°C) below the setting on the digital screen, if necessary.

**AUTO:** To allow the system to automatically control the temperature, air distribution and fan speed:

1. Set the temperature you want with the **TEMP** switch.
2. Press the **AUTO** switch. The word **AUTO** will appear on the digital screen.




# Comfort Controls & Audio Systems

## ■ *Automatic Electronic Climate Control (Cont.)*


To maintain proper comfort, the air flow direction will automatically change with increases or decreases in outside temperature, interior temperature, or sun load. After starting a cold engine, there may be up to a four-minute delay before the fan is turned on. The fan will automatically increase in speed as the coolant temperature rises.


Use the following controls when you wish to override the **AUTO** setting:


 : Sets the fan speed. Press the top of the switch to raise the fan speed, the bottom of the switch to lower the fan speed. The fan speed will be displayed on the digital screen (except in the **AUTO** mode).


## *Directional Controls*


When the following buttons are pressed the fan speed will go to **AUTO** unless you select a different speed.


 **BI-LEV:** Use on cool, but sunny days. This setting brings in the outside air, but directs it in two ways. The cool air is directed to the upper portion of your body through the instrument panel outlets, but most warmed air is directed through the heater ducts and a little to the defrost and side window vents. At times this temperature difference may be more apparent than others.

 **UPPER:** Press to direct air flow through the upper air outlets in the instrument panel.

 **HEAT:** Press to direct most of the air flow through the heater ducts, but some air flow through the windshield defroster vents and side window vents.

 **(Defog):** Use on cold, humid days with two or more passengers when windows fog. The air is directed through the heater, defrost, and side window vents.

 **DEF (Defrost):** Press to direct most air to the windshield and side window vents. The fan will automatically go to high. For a lower fan speed, press the fan switch.

 **VENT:** Use on pleasant days to direct outside air into the vehicle.

**OFF:** Press to turn off the system. Even in **Off**, the system will try to maintain the set temperature, with the fan off.

### ***Extended Idling with Automatic Electronic Climate Control***

When the engine idles for a long time, the outside temperature sensor may cause the system to blow air that is too cool. This should stop once the vehicle is moving again. Extended idling is not recommended. See the *Index* under *Engine Exhaust*.



### ***Steering Wheel Touch Controls for Climate Control (OPTION)***

Some heating and cooling controls can be adjusted at the steering wheel. Other touch controls also operate some audio controls. See *Steering Wheel Touch Controls for Audio System Control* later in this section.

**FAN:** Press the upper part of the control to increase the fan speed; press the lower part to reduce the fan speed.

**TEMP:** Press the upper part of the control to raise the inside temperature setting; press the lower part to lower the setting.

## Comfort Controls & Audio Systems



### Rear Window Defogger

**REAR DEFOG:** Press to warm the defogger grid on the rear window. The indicator light will glow while the rear window defogger is operating. The rear window defogger will turn off automatically after about ten minutes of use. If you turn it on again, the defogger will operate for about five minutes only.

You can also turn the defogger off by turning off the ignition or pressing the **REAR DEFOG** switch again.

Do not attach a temporary vehicle license across the defogger grid on the rear window.

### NOTICE


Don't use a razor blade or something else sharp on the inside of the rear window. If you do, you could cut or damage the warming grid, and the repairs wouldn't be covered by your warranty.





### **Rear Outlets (OPTION)**

Slide the center control up to direct air through upper outlets. Slide it down to direct air through lower outlets. The center position will direct air both up and down.

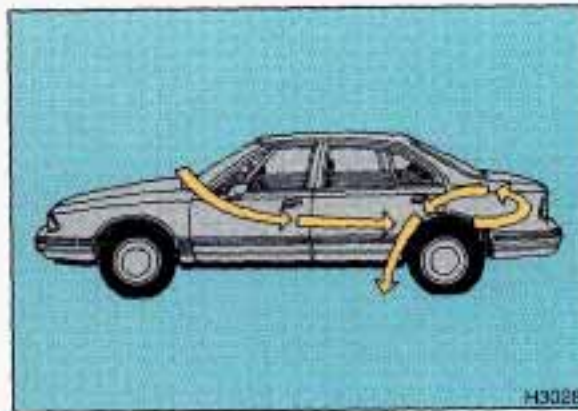

### **Flow-Through Ventilation System**

Your Oldsmobile's flow-through ventilation system supplies outside air into the vehicle when it is moving. Outside air will also enter the vehicle when the heater or the air conditioning fan is running.



### **Ventilation Tips**

- Keep the hood and front air inlet free of ice, snow, or any other obstruction (such as leaves). The heater and defroster will work far better, reducing the chance of fogging the inside of your windows.
- When you enter a vehicle in cold weather, select the **HEAT** setting, then turn the blower fan to high for a few moments before driving off. This will blow moist air from intake ducts toward the floor, not the windshield. It reduces the chance of fogging the inside of your windows.
- Keep the air path under the front seats clear of objects. This helps air to circulate throughout your vehicle.

# Comfort Controls & Audio Systems

## ■ Audio Systems

The following pages describe the audio systems available for your Oldsmobile, and how to get the best performance from them. Please read about the system in your vehicle.

### CAUTION



Hearing damage from loud noise is almost undetectable until it is too late. Your hearing can adapt to higher volumes of sound. Sound that seems normal can be loud and harmful to your hearing. Take precautions by adjusting the volume control on your radio to a safe sound level before your hearing adapts to it.

To help avoid hearing loss or damage:

1. Adjust the volume control to the lowest setting.
2. Increase the volume slowly until you hear comfortably and clearly.

### NOTICE

Before you add any sound equipment to your vehicle—like a tape player, CB radio, mobile telephone or two-way radio—be sure you can add what you want. If you can, it's very important to do it properly. Added sound equipment may interfere with the operation of your vehicle's engine, Delco® radio or other systems, and even damage them. And, your vehicle's systems may interfere with the operation of sound equipment that has been added improperly.

So, before adding sound equipment, check with your dealer and be sure to check Federal rules covering mobile radio and telephone units.



### Setting the Clock

No matter which audio system you have in your vehicle, setting the clock is easy.

1. With the radio off and the ignition on, press **SET**. The **SET** indicator will appear on the digital screen for five seconds.
2. During those five seconds, you must begin to set the clock to the correct hour and minute by depressing the **SCAN** and **SEEK** buttons. **SCAN** sets the hour, **SEEK** (or **SEEK▲** and **SEEK▼**) sets the minute.





### AM/FM Stereo Radio

The digital display indicates information on time or radio station frequency, the AM or FM radio band, whether the station is in stereo, and other radio functions.

**Upper Knob (VOLUME):** This knob does four things:

- Rotate it to turn the system on and off.
- Rotate it to control the volume.
- Press it to recall the station frequency when the radio is on.
- Press it to find out the time when the radio is off.

**Balance:** The control ring behind the upper knob adjusts the left/right speaker balance.

**Lower Knob (TUNE):** This knob does two things:

- Rotate it to tune in radio stations.
- Press it to change between the AM and FM bands.

**Fader:** The control ring behind the lower knob adjusts the front/rear speaker balance.

**SCAN:** When you press **SCAN**, the radio will go to the next station and pause for a few seconds. Press **SCAN** again to stop on a station.

**SEEK:** Press to seek and stop on the next station higher on the radio band.

**TREB (Treble):** Slide the lever up or down to adjust treble response.

**BASS:** Slide the lever up or down to adjust bass response.

### To Preset Radio Stations:

The four pushbuttons labeled 1-4 can be used to set up to 14 stations (seven AM and seven FM).

1. Tune in the station you want.
2. Press **SET**. (The **SET** indicator will appear on the digital screen for five seconds.)
3. While the **SET** indicator is displayed, press one of the four pushbuttons.
4. Repeat steps 1-3 for each of four AM and four FM stations.

Up to three additional stations on each band may be preset by "pairing" pushbuttons:

1. Tune in the desired station.
2. Press **SET**, and within five seconds press any two adjacent pushbuttons at the same time.
3. The station can be tuned in when the same two pushbuttons are pressed at the same time.



## Comfort Controls & Audio Systems



### **AM/FM Stereo Radio with Cassette Tape Player**

The digital display indicates information on time or radio station frequency, the AM or FM radio band, whether the station is in stereo, and other radio functions.

**POWER:** Press to turn the radio on and off when the ignition is on.

**VOL (Volume):** Press the top of the switch to increase volume. Press the bottom of the switch to lower the volume. For a normal listening level preset at the factory, press the center of the switch.

**SCAN:** When you press SCAN, the radio will go to the next station and pause there for a few seconds. Press SCAN again to stop on a station.

**SEEK:** Press SEEK▲ to tune in stations higher on the AM or FM band. Press SEEK▼ to tune in stations lower on either band.

**TUNE:** Press the top of the switch to tune in stations higher on the AM or FM band. Press the bottom of the switch to tune in stations lower on either band.

**RCL:** Press to change the display between the clock and the radio station frequency.

**AM/FM:** Press the AM or FM buttons to select either band. The band you select will appear on the display.

### **Balance Controls**

▶ Adjusts the left/right and front/rear speaker balance to your individual taste. When you change either adjustment, the bottom of the digital screen will display the point of balance you have selected. For a normal setting preset at the factory, press the left/right or front/rear balance symbols at the same time.

**BASS:** Adjusts the bass level up or down.

**TREB:** Adjusts the treble level up or down.

### To Preset Radio Stations:



Using the five pushbuttons numbered 1-5, you can set up to ten radio stations (five AM and five FM).

1. Tune in the station you want.
2. Press **SET**. (The **SET** indicator will appear on the digital screen for five seconds.)
3. While the **SET** indicator is displayed, press one of the five pushbuttons.
4. Repeat steps 1-3 for each of five AM and five FM stations.

### To Play a Cassette Tape:

With the power switch on, insert a tape into the cassette door. Do not use tapes that are longer than 45 minutes on each side.

When the arrow on the **PROG** button is pointed up, the top side of the tape is playing. When the arrow is pointed down, the bottom side of the tape is playing. When a side is finished playing, auto-reverse plays the other side.

This audio system has automatic  Dolby B NR<sup>®</sup> to reduce background noise on Dolby encoded tapes. Dolby<sup>®</sup> Noise Reduction is manufactured under license from Dolby Laboratories Licensing Corporation. Dolby<sup>®</sup> and the  symbol are trademarks of Dolby Laboratories Licensing Corporation.

**FWD (Forward):** Press to advance the tape rapidly. The radio will play while the tape advances. Press again to play the tape.

**REV (Reverse):** Press to rewind the tape. The radio will play while the tape rewinds. Press again to play the tape.

**CRO<sub>2</sub>:** Press to set the tape bias for high bias chrome or metal tapes (a light on the button will go on). Press again to play standard tapes (the light will go out).

**PROG (Program):** Press to change the side of the tape being played.

**SEEK:** Press to search for the next selection on the tape. There must be at least a three-second gap in the tape for **SEEK** to stop.

**REPT (Repeat):** Press to repeat a selection on the tape.

**EJCT (Eject):** Press to eject the tape from the player. The radio will then play.

## Comfort Controls & Audio Systems



### **AM/FM Stereo with Cassette Player and Graphic Equalizer**

The digital display indicates information on time or radio station frequency, the AM or FM radio band, whether the station is in stereo, and other radio functions.

**POWER:** Press to turn the unit on and off when the ignition is on.

**VOL (Volume):** Adjusts the volume up or down, and the bottom of the digital screen displays the setting. For the normal listening level preset at the factory, press the center of the switch.

**SCAN:** When you press **SCAN**, the radio will go to the next station and pause there for a few seconds. Press **SCAN** again to stop on a station.

**SEEK:** Each time you press **SEEK ▲** or **SEEK ▼**, you will tune in the next station up or down on the AM or FM radio band.

**TUNE:** Press this control to tune in stations higher or lower on the AM or FM radio band.

**RCL (Recall):** Press to change between the clock and the radio station frequency displayed on the digital screen, when the radio is on.

**AM/FM:** Press these buttons to select either the AM or FM radio band. The band you select will be displayed on the digital screen.

Your radio has an AMAX-certified receiver. It can produce quality AM stereo sound and receive C-Quam® stereo broadcasts. AMAX reduces noise without reducing the high frequencies you need for the best sound. You don't have to do anything to your Delco/GM radio because AMAX is automatic.

### **Equalizer Controls**

Boost the bass, emphasize a voice in a song, brighten the treble—your equalizer gives you freedom to adjust five separate frequencies of sound to your individual taste. Move a lever up to emphasize a frequency, move it down to de-emphasize. It's best to begin with the levers in the middle position, then adjust each lever as you like.



### Balance Controls

▶ Adjusts the left/right and front/rear speaker balance to your individual taste. When you change either adjustment, the bottom of the digital screen will display the point of balance you have selected. For the normal setting preset at the factory, press the left/right or front/rear balance symbols at the same time.

### To Preset Radio Stations:



The five pushbuttons (numbered 1-5) can be used to preset up to ten radio stations (five AM and five FM stations).

1. Tune the digital display to the station you want.
2. Press **SET**. (The **SET** indicator will appear on the digital screen for five seconds.)
3. While the **SET** indicator is displayed, press one of the five pushbuttons.
4. Repeat steps 1-3 for each of five AM and five FM stations.

### To Play a Cassette Tape:

With the power switch on, insert a tape into the cassette door. Do not use tapes that are longer than 45 minutes on each side.

When the arrow on the **PROG** button is pointed up, the top side of the tape is playing. When the arrow is pointed down, the bottom side of the tape is playing. When a side is finished playing, auto-reverse plays the other side.

This audio system has automatic  Dolby B NR<sup>®</sup> to reduce background noise on Dolby encoded tapes. Dolby<sup>®</sup> Noise Reduction is manufactured under license from Dolby Laboratories Licensing Corporation. Dolby<sup>®</sup> and the  symbol are trademarks of Dolby Laboratories Licensing Corporation.

**FWD (Forward):** Press to advance the tape rapidly. The radio will play while the tape advances. Press again to play the tape.

**REV (Reverse):** Press to rewind the tape. The radio will play while the tape rewinds. Press again to play the tape.

**CRO<sub>2</sub>:** Press to set the tape bias for high bias chrome or metal tapes (a light on the button will go on). Press again to play standard tapes (the light will go out).

**PROG (Program):** Press to change the side of the tape being played.

**SEEK:** Press to search for the next selection on the tape. There must be at least a three-second gap in the tape for **SEEK** to stop.

**REPT (Repeat):** Press to repeat a selection on the tape.

**EJCT (Eject):** Press to eject the tape from the player. The radio will then play.

# Comfort Controls & Audio Systems



## Compact Disc Player

### To Play a Compact Disc:

If you have the optional compact disc player, don't use mini-discs that are called singles. They won't eject. Use only full-size compact discs.

1. Press **POWER** to turn the radio on.
2. Insert a disc partway into the slot, with the label side up. The player will pull it in. In a few seconds, the disc should play.

While a disc is playing, the **CD IN** indicator is displayed on the digital screen, as is the selected track.

If the disc comes back out:

- The disc may be upside down.
- The disc may be dirty, scratched or wet.

- There may be too much moisture in the air (wait about one hour and try again).
- The player may be too hot, or the road may be too rough for the disc to play. If the word **ERR** appears on the display, the player is too hot. Press **RCL** to remove **ERR** from the display. As soon as things get back to normal, the disc should play.

**RCL (Recall):** Press to see how long your selection has been playing.

**COMP (Compression):** Depressing this button makes soft and loud passages more equal in volume. Press again to resume normal play.

**SCAN:** Press to hear the first ten seconds of each track. Press it again to stop the scan. The word **SCAN** appears during a scan.

**STOP:** Press to stop the disc. The radio will play.

**TRAK:** Press ► to advance the disc to the next track. Press ◀ to reverse the disk to the previous gap between tracks.

**EJCT:** Press to eject the disc. The radio will play.



### ***Steering Wheel Touch Controls for Audio System (OPTION)***

Some audio system functions described in the previous pages can also be operated with the Steering Wheel Touch Controls option. Other touch controls also operate some climate controls. See *Steering Wheel Touch Controls for Climate Control* earlier in this section.

**VOL (Volume):** Press the top part of the switch to increase volume, the bottom part to decrease volume.

**SEEK:** Each time you press **SEEK**, you will tune in a radio station higher on the AM or FM band.

When playing a CD, press **SEEK** to listen to the next selection on the disc.

**PROG (Program):** Press **PROG** to tune in a preset radio station higher on the AM or FM band.

When playing a tape, press **PROG** to play the other side of the tape.

### ***Understanding Radio Reception***

#### **FM Stereo**

FM stereo will give you the best sound, but FM signals will reach only about 10 to 40 miles (16 to 65 km). Tall buildings or hills can interfere with FM signals, causing the sound to come and go.

#### **AM**

The range for most AM stations is greater than for FM, especially at night. The longer range, however, can cause stations to interfere with each other. AM can also pick up noise from things like storms and power lines. To lower this noise, try reducing the treble level.



## Comfort Controls & Audio Systems



### ***Understanding Radio Reception (CONT.)***

#### **AM Stereo**

Your Delco® system may be able to receive C-Quam® stereo broadcasts. Many AM stations around the country use C-Quam® to produce stereo, though some do not. C-Quam® is a registered trademark of Motorola, Inc. If your Delco® system can get C-Quam® signals, your stereo indicator light will come on when you are receiving it.

### ***Care of Your Cassette Tape Player***

A tape player that is not cleaned regularly can cause reduced sound quality, ruined cassettes, or a damaged mechanism. Cassette tapes should be stored in their cases away from contaminants, direct sunlight, and extreme heat. If they aren't, they may not operate properly or cause failure of the tape player.

Your tape player should be cleaned regularly each month or after every 15 hours of use. If you notice a reduction in sound quality, try a known good cassette to see if the tape or the tape player is at fault. If this other cassette has no improvement in sound quality, clean the tape player.

Clean your tape player with a wiping-action, non-abrasive cleaning cassette, and follow the directions provided with it.

Cassettes are subject to wear and the sound quality may degrade over time. Always make sure that the cassette tape is in good condition before you have your tape player serviced.



### ***Care of Your Compact Discs***

Handle discs carefully. Store them in their original cases or other protective cases and away from direct sunlight and dust. If the surface of a disc is soiled, dampen a clean, soft cloth in a mild, neutral detergent solution and clean it, wiping from the center to the edge.

Be sure never to touch the signal surface when handling discs. Pick up discs by grasping the outer edges or the edge of the hole and the outer edge.

### ***Fixed Mast Antenna***

The fixed mast antenna can withstand most car washes without being damaged. If the mast should ever become slightly bent, you can straighten it out by hand. If the mast is badly bent, as it might be by vandals, you should replace it.

Check every once in a while to be sure the mast is still tightened to the fender.



### ***Power Antenna Mast Care (OPTION)***

Your power antenna will look its best and work well if it's cleaned from time to time.

#### **To Clean the Antenna Mast:**

1. Turn on the ignition and radio to raise the antenna to full mast extension.
2. Dampen a clean cloth with mineral spirits or equivalent solvent.
3. Wipe the cloth over the mast sections, removing any dirt.
4. Wipe dry with a clean cloth before retracting.
5. Make the antenna go up and down by turning the radio or ignition on and off.
6. Then repeat if necessary.

## Comfort Controls & Audio Systems

### Power Antenna Mast Care (CONT.)

#### **NOTICE**

Don't lubricate the power antenna. Lubrication could damage it.

#### **NOTICE**

Before entering an automatic car wash, turn off your radio to make the power antenna go down. This will prevent the mast from possibly getting damaged. If the antenna does not go down when you turn the radio off, it may be damaged or need to be cleaned. In either case, lower the antenna by hand by carefully pressing the antenna down.

If the mast portion of your antenna is damaged, you can easily replace it. See your dealer for a replacement kit, and follow the instructions in the kit.





## Part 4

# *Your Driving and the Road*

Here you'll find information about driving on different kinds of roads and in varying weather conditions. We've also included many other useful tips on driving.

Road Signs .....	148
Defensive Driving .....	152
Drunken Driving .....	153
Control of a Vehicle	
Braking .....	156
Anti-Lock Brakes .....	157
Steering Tips .....	161
Steering in Emergencies .....	162
Passing .....	164
Driving at Night .....	166
Driving in the Rain .....	169
Driving in Fog, Mist and Haze .....	171
City Driving .....	172
Freeway Driving .....	173
Driving a Long Distance .....	175
Hill and Mountain Roads .....	177
Parking on Hills .....	178
Winter Driving .....	180
Towing a Trailer .....	183

# Your Driving and the Road

## ■ Road Signs

The road signs you see everywhere are coded by color, shape and symbols. It's a good idea to know these codes so that you can quickly grasp the basic meaning or intent of the sign even before you have a chance to read it.



STOP

DO NOT  
ENTER

WRONG  
WAY

X4025



RR ADVANCE  
CROSSING

NARROW  
BRIDGE

NO PASSING  
ZONE

X4028

## Color of Road Signs

**Red** means **Stop**. It may also indicate that some movement is not allowed. Examples are **Do Not Enter** and **Wrong Way**.



X3071

**Green** is used to guide the driver. Green signs may indicate upcoming freeway exits or show the direction you should turn to reach a particular place.

**Yellow** indicates a general warning. Slow down and be careful when you see a yellow sign. It may signal a railroad crossing ahead, a no passing zone, or some other potentially dangerous situation. Likewise, a yellow solid line painted on the road means **Don't Cross**.



X3012

HOSPITAL

INFORMATION

**Blue** signs with white letters show motorists' services.





LOW  
SHOULDER

WORKERS  
AHEAD

FLAGGER  
AHEAD

X4027

**Orange** indicates road construction or maintenance. You'll want to slow down when you see an orange sign, as part of the road may be closed off or torn up. And there may be workers and maintenance vehicles around, too.



X3014

### **Shape of Road Signs**

The shape of the sign will tell you something, too.

An **octagonal** (eight-sided) sign means **Stop**. It is always red with white letters.



X4028

A **diamond**-shaped sign is a warning of something ahead—for example, a curve, steep hill, soft shoulder, or a narrow bridge.



CANOEING

SWIMMING

X3013

**Brown** signs point out recreation areas or points of historic or cultural interest.



X3016

A **triangle**, pointed downward, indicates **Yield**. It assigns the right of way to traffic on certain approaches to an intersection.




X3017

A **triangular** sign also is used on two-lane roads to indicate a **No Passing Zone**. This sign will be on the left side of the roadway.



# Your Driving and the Road

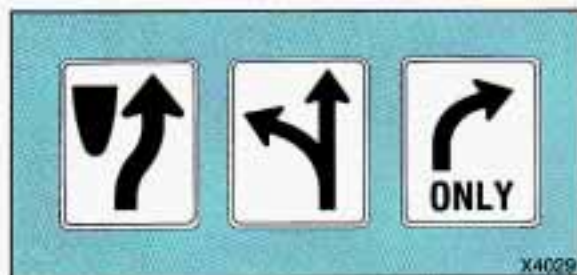

KEEP  
RIGHT

LEFT OR  
THROUGH

RIGHT TURN  
ONLY

## Shape of Road Signs (CONT.)

**Rectangular** (square or oblong) signs show speed limits, parking regulations, give directions, and such information as distances to cities.



X4030

## Symbols on Road Signs

There are many international road signs in use today.



X4031

NO U  
TURN

NO  
PARKING

NO  
BICYCLES

The basic message of many of these signs is in pictures or graphic symbols. A picture within a circle with a diagonal line across it shows what **not** to do.




X3021

## Traffic Lights

We're all familiar with traffic lights or stop lights. Often green arrows are being used in the lights for improved traffic control. On some multilane roads, green arrows light up, indicating that traffic in one or more lanes can move or make a turn. Green arrows don't mean "go no matter what." You'll still need to proceed with caution, yielding the right of way to pedestrians and sometimes to other vehicles.

Some traffic lights also use red arrows to signify that you must stop before turning on red.

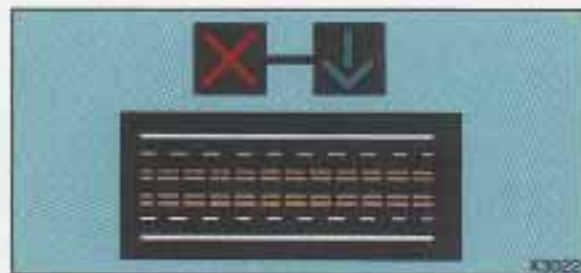

REVERSIBLE LANE ON MULTILANE ROADWAY

Many city roads and expressways, and even bridges, use reversible-lane traffic control during rush hours. A red X light above a lane means no driving in that lane at that time. A green arrow means you may drive in that lane. Look for the signs posted to warn drivers what hours and days these systems are in effect.



NO PASSING ZONE

### ***Pavement Markings***

Pavement markings add to traffic signs and signals. They give information to drivers without taking attention from the roadway. A solid yellow line on your side of the road or lane means **Don't Cross**.

### ***Your Own Signals***

Drivers signal to others, too. It's not only more polite, it's safer to let other drivers know what you are doing. And in some places the law requires driver signals.

#### **Turn and Lane Change Signals:**

Always signal when you plan to turn or change lanes.

If necessary, you can use hand signals out the window: Left arm straight out for a left turn, down for slow or about-to-stop, and up for a right turn.

**Slowing Down:** If time allows, tap the brake pedal once or twice in advance of slowing or stopping. This warns the driver behind you.

**Disabled:** Your four-way flashers signal that your vehicle is disabled or is a hazard. See the *Index* under *Hazard Warning Flashers*.

#### ***Traffic Officer***

The traffic police officer is also a source of important information. The officer's signals govern, no matter what the traffic lights or other signs say.

The next section discusses some of the road conditions you may encounter.

# Your Driving and the Road

## **Defensive Driving**

The best advice anyone can give about driving is: Drive defensively.

Please start with a very important safety device in your Oldsmobile: Buckle up. (See the *Index* under *Safety Belts*.)

Defensive driving really means “be ready for anything.” On city streets, rural roads, or freeways, it means “always expect the unexpected.”

Assume that pedestrians or other drivers are going to be careless and make mistakes. Anticipate what they might do. Be ready for their mistakes.

Expect children to dash out from behind parked cars, often followed by other children. Expect occupants in parked cars to open doors into traffic. Watch for movement in parked cars—someone may be about to open a door.

Expect other drivers to run stop signs when you are on a through street. Be ready to brake if necessary as you go through intersections. You may not have to use the brake, but if you do, you will be ready.

If you're driving through a shopping center parking lot where there are well-marked lanes, directional arrows, and designated parking areas, expect some drivers to ignore all these markings and dash straight toward one part of the lot.

Pedestrians can be careless. Watch for them. In general, you must give way to pedestrians even if you know you have the right of way.

Rear-end collisions are about the most preventable of accidents. Yet they are common. Allow enough following

distance. It's the best defensive driving maneuver, in both city and rural driving. You never know when the vehicle in front of you is going to brake or turn suddenly.

Here's a final bit of information about defensive driving. The most dangerous time for driving in the U.S. is very early on Sunday morning. In fact, GM Research studies show that the most and the least dangerous times for driving, every week, fall on the same day. That day is Sunday. The most dangerous time is Sunday from 3 a.m. to 4 a.m. The safest time is Sunday from 10 a.m. to 11 a.m. Driving the same distance on a Sunday at 3 a.m. isn't just a little more dangerous than it is at 10 a.m. It's about 134 times more dangerous!

That leads to the next section.



## ***Drunken Driving***

Death and injury associated with drinking and driving is a national tragedy. It's the number one contributor to the highway death toll, claiming thousands of victims every year. Alcohol takes away three things that anyone needs to drive a vehicle:

- Judgment
- Muscular Coordination
- Vision

Police records show that half of all motor vehicle-related deaths involve alcohol—a driver, a passenger or someone else, such as a pedestrian, had been drinking. In most cases, these deaths are the result of someone who was drinking and driving. Over 25,000 motor vehicle-related deaths occur each year because of alcohol, and thousands of people are injured.

Just how much alcohol is too much if a person plans to drive? Ideally, no one should drink alcohol and then drive. But if one does, then what's "too much"? It can be a lot less than many might think. Although it depends on each person and situation, here is some general information on the problem.

The Blood Alcohol Content (BAC) of someone who is drinking depends upon four things:

- How much alcohol is in the drink.
- The drinker's body weight.
- The amount of food that is consumed before and during drinking.
- The length of time it has taken the drinker to consume the alcohol.




According to the American Medical Association, a 180-pound (82 kg) person who drinks three 12-ounce (355 ml) bottles of beer in an hour will end up with a BAC of about 0.06 percent. The person would reach the same BAC by drinking three 4-ounce (120 ml) glasses of wine or three mixed drinks if each had 1½ ounces (45 ml) of a liquor like whiskey, gin or vodka.

It's the amount of alcohol that counts. For example, if the same person drank three double martinis (3 ounces or 90 ml of liquor each) within an hour, the person's BAC would be close to 0.12 percent. A person who consumes food just before or during drinking will have a slightly lower BAC level.

## Your Driving and the Road

**Drinking that Will Result in a BAC of .05% in the Time Shown**

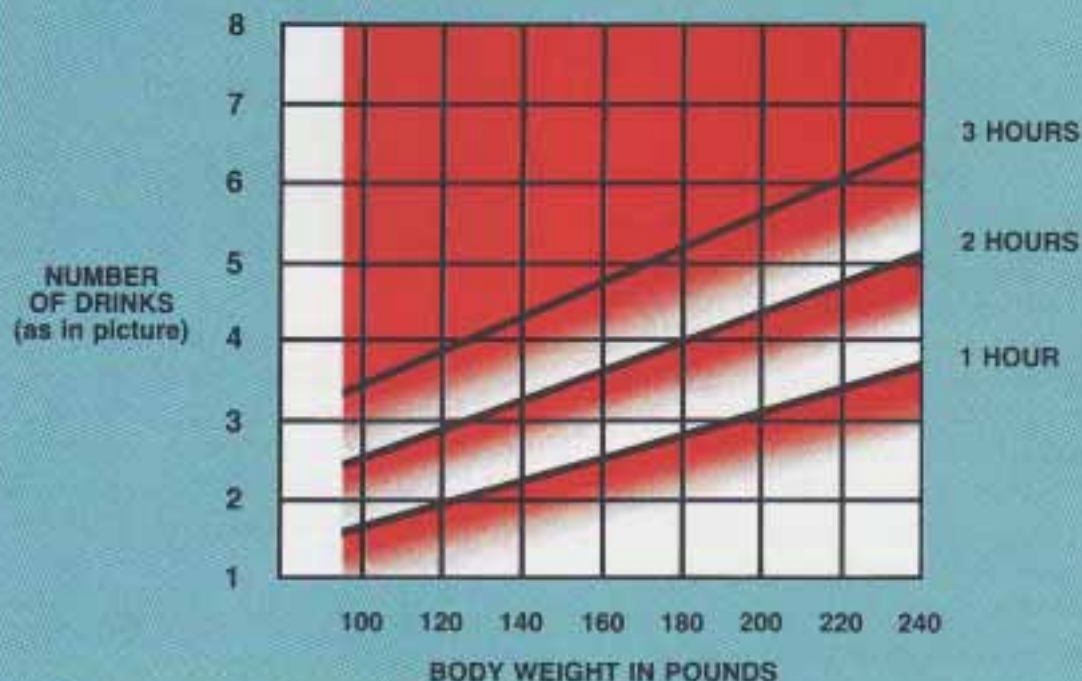

### **Drunken Driving (CONT.)**

The law in most U.S. states sets the legal limit at a BAC of 0.10 percent. In Canada the limit is 0.08 percent, and in some other countries it's lower than that. The BAC will be over 0.10 percent after three to six drinks (in one hour).

Of course, as we've seen, it depends on how much alcohol is in the drinks, and how quickly the person drinks them.

But it's very important to keep in mind that the ability to drive is affected well below a BAC of 0.10 percent. Research

shows that the driving skills of many people are impaired at a BAC approaching 0.05 percent, and that the effects are worse at night. All drivers are impaired at BAC levels above 0.05 percent. Statistics show that the chance of being in an accident increases sharply for drivers who have a BAC of 0.05 percent or above. A driver with a BAC level of 0.06 percent (three beers in one hour for a 180-pound or 82 kg person) has doubled his or her chance of having an accident. At a BAC level of 0.10 percent, the chance of that driver having an accident is six times greater; at a level of 0.15 percent, the chances are twenty-five times greater! And, the body takes about an hour to rid itself of the alcohol in one drink. No amount of coffee or number of cold showers will speed that up.



“I’ll be careful” isn’t the right answer. What if there’s an emergency, a need to take sudden action, as when a child darts into the street? A person with a higher BAC might not be able to react quickly enough to avoid the collision.

There’s something else about drinking and driving that many people don’t know. Medical research shows that alcohol in a person’s system can make crash injuries worse. That’s especially true for brain, spinal cord and heart injuries. That means that if anyone who has been drinking—driver or passenger—is in a crash, the chance of being killed or permanently disabled is higher than if that person had not been drinking. And we’ve already seen that

the chance of a crash itself is higher for drinking drivers.

### **CAUTION**



Drinking and then driving is very dangerous. Your reflexes, perceptions, and judgment will be affected by even a small amount of alcohol. You could have a serious—or even fatal—accident if you drive after drinking. Please don’t drink and drive or ride with a driver who has been drinking. Ride home in a cab; or if you’re with a group, designate a driver who will not drink.



### ■ *Control of a Vehicle*

You have three systems that make your vehicle go where you want it to go. They are the brakes, the steering and the accelerator. All three systems have to do their work at the places where the tires meet the road.

Sometimes, as when you’re driving on snow or ice, it’s easy to ask more of those control systems than the tires and road can provide. That means you can lose control of your vehicle.



# Your Driving and the Road

## Braking

Braking action involves **perception time** and **reaction time**.

First, you have to decide to push on the brake pedal. That's **perception time**. Then you have to bring up your foot and do it. That's **reaction time**.

Average **reaction time** is about  $\frac{3}{4}$  of a second. But that's only an average. It might be less with one driver and as long as two or three seconds or more with another. Age, physical condition, alertness, coordination, and eyesight all play a part. So do alcohol, drugs and frustration. But even in  $\frac{3}{4}$  of a second, a vehicle moving at 60 mph (100 km/h) travels 66 feet (20 m). That could be a lot of distance in an emergency, so keeping enough space between your vehicle and others is important.

And, of course, actual stopping distances vary greatly with the surface of the road (whether it's pavement or gravel); the condition of the road (wet, dry, icy); tire tread; and the condition of your brakes.

Most drivers treat their brakes with care. Some, however, overwork the braking system with poor driving habits.

- Avoid needless heavy braking. Some people drive in spurts—heavy acceleration followed by heavy braking—rather than keeping pace with traffic. This is a mistake. Your brakes may not have time to cool between hard stops. Your brakes will wear out much faster if you do a lot of heavy braking.



- Don't “ride” the brakes by letting your left foot rest lightly on the brake pedal while driving.

## CAUTION



“Riding” your brakes can cause them to overheat to the point that they won’t work well. You might not be able to stop your vehicle in time to avoid an accident. If you “ride” your brakes, they will get so hot they will require a lot of pedal force to slow you down. Avoid “riding” the brakes.

## NOTICE

“Riding” the brakes wears them out much faster. You would need costly brake replacement much sooner than normal, and it also reduces fuel economy.

If you keep pace with the traffic and allow realistic following distances, you will eliminate a lot of unnecessary braking. That means better braking and longer brake life.

- If your engine ever stops while you’re driving, brake normally but don’t pump your brakes. If you do, the pedal may get harder to push down. If your engine stops, you will still have some power brake assist. But you will use it when you brake. Once the power assist is used up, it may take longer to stop and the brake pedal will be harder to push.




## Anti-Lock Brakes

Your Oldsmobile has an advanced electronic braking system that will help prevent skidding.



## Your Driving and the Road

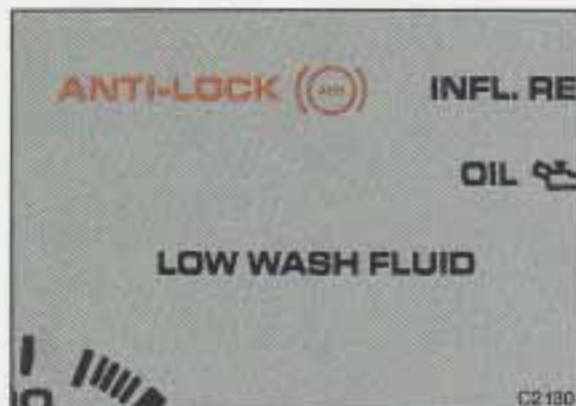

### Anti-Lock Brakes (CONT.)

This light on the instrument panel will go on when you start your vehicle. See the *Index* under *Anti-Lock Brake System Warning Light*.



Here's how anti-lock works. Let's say the road is wet. You're driving safely. Suddenly an animal jumps out in front of you.

You slam on the brakes. Here's what happens with ABS.

A computer senses that wheels are slowing down. The computer separately works the brakes at each front wheel and at the rear wheels.

The anti-lock system can change the brake pressure faster than any driver could. The computer is programmed to make the most of available tire and road conditions.



You can steer around the obstacle while braking hard. As you brake, your computer keeps receiving updates on wheel speed and controls braking pressure accordingly.

### CAUTION



Anti-lock doesn't change the time you need to get your foot up to the brake pedal. If you get too close to the vehicle in front of you, you won't have time to apply your brakes if that vehicle suddenly slows or stops. Always leave enough room up ahead to stop, even though you have anti-lock brakes.



### To Use Anti-Lock:

Don't pump the brakes. Just hold the brake pedal down and let anti-lock work for you.

When you start your vehicle and begin to drive away, you may hear a momentary motor or clicking noise and you may even notice that your brake pedal moves a little while this is going on. This is the ABS system testing itself. You also may hear this during a hard stop.



### Traction Control (OPTION)

Your vehicle may have a traction control system that limits wheel spin. This is especially useful in slippery road conditions. The traction control system works at low speeds only, such as when you accelerate from a stop. It applies brake pressure to an individual wheel that the system senses is about to spin.

You may feel the system working, or you may notice some noise, but this is normal.



A **TRACTION OFF** warning light in the instrument cluster lets you know if your traction control system is not working. See the *Index* under *Traction Control System Warning Light*.

To turn the system off, press the **TRAC CTRL** switch located to the right of the steering wheel while the vehicle is stopped. The **TRACTION OFF** warning light will come on and stay on. To turn the system back on, bring the vehicle to a stop and press the switch again. The warning light should go off. The system will also turn itself on if you turn your ignition off and back on again. When the traction control switch is turned on, it will turn off the cruise control.

# Your Driving and the Road

## Disc Brake Wear Indicators

Your Oldsmobile has front disc brakes and rear drum brakes. Disc brake pads have built-in wear indicators that make a high-pitched warning sound when the brake pads are worn and new pads are needed. The sound may come and go or be heard all the time your vehicle is moving (except when you are pushing on the brake pedal firmly).

### CAUTION



The brake wear warning sound means that sooner or later your brakes won't work well. That could lead to an accident. When you hear the brake wear warning sound, have your vehicle serviced.

### NOTICE

Continuing to drive with worn-out brake pads could result in costly brake repair.

Some driving conditions or climates may cause a brake squeal when the brakes are first applied or lightly applied. This does not mean something is wrong with your brakes.

## Rear Drum Brakes

Your rear drum brakes don't have wear indicators, but if you ever hear a rear brake rubbing noise, have the rear brake linings inspected. Also, the rear brake drums should be removed and inspected each time the tires are removed for rotation or changing. When you have the front brakes replaced, have the rear brakes inspected, too.

Brake linings should always be replaced as complete axle sets.

## Brake Pedal Travel

See your dealer if the brake pedal does not return to normal height, or if there is a rapid increase in pedal travel. This could be a sign of brake trouble.

### ***Brake Adjustment***

Every time you make a moderate brake stop, your brakes adjust for wear. If you rarely make a moderate or heavier stop, then your brakes might not adjust correctly. If you drive in that way, then—very carefully—make a few moderate brake stops about every 1,000 miles (1 600 km), so your brakes will adjust properly.

### ***Braking In Emergencies***

Use your anti-lock braking system when you need to. With anti-lock, you can steer and brake at the same time. In many emergencies, steering can help you more than even the very best braking.

### ***Power Steering***

If you lose power steering assist because the engine stops or the system fails to function, you can steer but it will take much more effort.

### ***Steering Tips—Driving on Curves***

It's important to take curves at a reasonable speed.

A lot of the "driver lost control" accidents mentioned on the news happen on curves. Here's why:

Experienced driver or beginner, each of us is subject to the same laws of physics when driving on curves. The traction of the tires against the road surface makes it possible for the vehicle to change its path when you turn the front wheels. If there's no traction, inertia will keep the vehicle going in the same direction. If you've ever tried to steer a vehicle on wet ice, you'll understand this.

The traction you can get in a curve depends on the condition of your tires and the road surface, the angle at which



## *Your Driving and the Road*

### ***Steering Tips—Driving on Curves*** ***(CONT.)***

the curve is banked, and your speed. While you're in a curve, speed is the one factor you can control.

Suppose you're steering through a sharp curve. Then you suddenly accelerate. Those two control systems—steering and acceleration—can overwhelm those places where the tires meet the road and make you lose control.

What should you do if this ever happens? Let up on the brake or accelerator pedal, steer the vehicle the way you want it to go, and slow down.

Speed limit signs near curves warn that you should adjust your speed. Of course, the posted speeds are based on

good weather and road conditions. Under less favorable conditions you'll want to go slower.

If you need to reduce your speed as you approach a curve, do it before you enter the curve, while your front wheels are straight ahead.

Try to adjust your speed so you can "drive" through the curve. Maintain a reasonable, steady speed. Wait to accelerate until you are out of the curve, and then accelerate gently into the straightaway.

When you drive into a curve at night, it's harder to see the road ahead of you because it bends away from the straight beams of your lights. This is one good reason to drive slower.



### ***Steering in Emergencies***

There are times when steering can be more effective than braking. For example, you come over a hill and find a truck stopped in your lane, or a car suddenly pulls out from nowhere, or a child darts out from between parked cars and stops right in front of you. You can avoid these problems by braking—if you can stop in time. But sometimes you can't; there isn't room. That's the time for evasive action—steering around the problem.

Your Oldsmobile can perform very well in emergencies like these. First apply your brakes. It is better to remove as much speed as you can from a possible collision. Then steer around the problem, to the left or right depending on the space available.

An emergency like this requires close attention and a quick decision. If you are holding the steering wheel at the recommended 9 and 3 o'clock positions, you can turn it a full 180 degrees very quickly without removing either hand. But you have to act fast, steer quickly, and just as quickly straighten the wheel once you have avoided the object. You must then be prepared to steer back to your original lane and then brake to a controlled stop.

Depending on your speed, this can be rather violent for an unprepared driver. This is one of the reasons driving experts recommend that you use your safety belts and keep both hands on the steering wheel.

The fact that such emergency situations are always possible is a good reason to practice defensive driving at all times.



### *Off-Road Recovery*

You may find sometime that your right wheels have dropped off the edge of a road onto the shoulder while you're driving.

If the level of the shoulder is only slightly below the pavement, recovery should be fairly easy. Ease off the accelerator and then, if there is nothing in the way, steer so that your vehicle straddles the edge of the pavement. You can turn the steering wheel up to  $\frac{1}{4}$  turn until the right front tire contacts the pavement edge. Then turn your steering wheel to go straight down the roadway.

If the shoulder appears to be about four inches (100 mm) or more below the pavement, this difference can cause problems. If there is not enough room to

pull entirely onto the shoulder and stop, then follow the same procedures. But if the right front tire scrubs against the side of the pavement, do **not** steer more sharply. With too much steering angle, the vehicle may jump back onto the road with so much steering input that it crosses over into the oncoming traffic before you can bring it back under control. Instead, ease off again on the accelerator and steering input, straddle the pavement once more, then try again.



# Your Driving and the Road

## Passing

The driver of a vehicle about to pass another on a two-lane highway waits for just the right moment, accelerates, moves around the vehicle ahead, then goes back into the right lane again. A simple maneuver?

Not necessarily! Passing another vehicle on a two-lane highway is a potentially dangerous move, since the passing vehicle occupies the same lane as oncoming traffic for several seconds. A miscalculation, an error in judgment, or a brief surrender to frustration or anger can suddenly put the passing driver face to face with the worst of all traffic accidents—the head-on collision.

So here are some tips for passing:

- “Drive ahead.” Look down the road, to the sides, and to crossroads for situations that might affect your passing patterns. If you have any doubt whatsoever about making a successful pass, wait for a better time.
- Watch for traffic signs, pavement markings, and lines. If you can see a sign up ahead that might indicate a turn or an intersection, delay your pass. A broken center line usually indicates it’s all right to pass (providing the road ahead is clear). Never cross a solid line on your side of the lane or a double solid line, even if the road seems empty of approaching traffic.
- If you suspect that the driver of the vehicle you want to pass isn’t aware of your presence, tap the horn a couple of times before passing.
- Do not get too close to the vehicle you want to pass while you’re awaiting an opportunity. For one thing, following too closely reduces your area of vision, especially if you’re following a larger vehicle. Also, you won’t have adequate space if the vehicle ahead suddenly slows or stops. Keep back a reasonable distance.

- When it looks like a chance to pass is coming up, start to accelerate but stay in the right lane and don’t get too close. Time your move so you will be increasing speed as the time comes to move into the other lane. If the way is clear to pass, you will have a “running start” that more than makes up for the distance you would lose by dropping back. And if something happens to cause you to cancel your pass, you need only slow down and drop back again and wait for another opportunity.
- If other cars are lined up to pass a slow vehicle, wait your turn. But take care that someone isn’t trying to pass you as you pull out to pass the slow vehicle. Remember to glance over your shoulder and check the blind spot.



- Check your mirrors, glance over your shoulder, and start your left lane change signal before moving out of the right lane to pass. When you are far enough ahead of the passed vehicle to see its front in your inside mirror, activate your right lane change signal and move back into the right lane. (Remember that your right outside mirror is convex. The vehicle you just passed may seem to be farther away from you than it really is.)
- Try not to pass more than one vehicle at a time on two-lane roads. Reconsider before passing the next vehicle.
- Don't overtake a slowly moving vehicle too rapidly. Even though the brake lights are not flashing, it may be slowing down or starting to turn.
- If you're being passed, make it easy for the following driver to get ahead of you. Perhaps you can ease a little to the right.

### ***Loss of Control***

Let's review what driving experts say about what happens when the three control systems (brakes, steering and acceleration) don't have enough friction where the tires meet the road to do what the driver has asked.

In any emergency, don't give up. Keep trying to steer and constantly seek an escape route or area of less danger.

### ***Skidding***

In a skid, a driver can lose control of the vehicle. Defensive drivers avoid most skids by taking reasonable care suited to existing conditions, and by not "overdriving" those conditions. But skids are always possible.

The three types of skids correspond to your Oldsmobile's three control systems. In the braking skid your wheels aren't rolling. In the steering or cornering skid, too much speed or steering in a curve causes tires to slip and lose cornering force. And in the acceleration skid too much throttle causes the driving wheels to spin.

A cornering skid and an acceleration skid are best handled by easing your foot off the accelerator pedal. If your vehicle starts to slide (as when you turn a corner on a wet, snow- or ice-covered road), ease your foot off the accelerator pedal as soon as you feel the vehicle

# Your Driving and the Road



## Driving at Night

Night driving is more dangerous than day driving. One reason is that some drivers are likely to be impaired—by alcohol or drugs, with night vision problems, or by fatigue.

Here are some tips on night driving.

- Drive defensively. Remember, this is the most dangerous time.
- Don't drink and drive. (See the *Index* under *Drunken Driving* for more on this problem.)
- Adjust your inside rearview mirror to reduce the glare from headlights behind you.

## Skidding (CONT.)

start to slide. Quickly steer the way you want the vehicle to go. If you start steering quickly enough, your vehicle will straighten out. As it does, straighten the front wheels.

Of course, traction is reduced when water, snow, ice, gravel, or other material is on the road. For safety, you'll want to slow down and adjust your driving to these conditions. It is important to slow down on slippery surfaces because stopping distance will be longer and vehicle control more limited.

While driving on a surface with reduced traction, try your best to avoid sudden steering, acceleration, or braking (including engine braking by shifting to a lower gear). Any sudden changes could cause the tires to slide. You may

not realize the surface is slippery until your vehicle is skidding. Learn to recognize warning clues—such as enough water, ice or packed snow on the road to make a “mirrored surface”—and slow down when you have any doubt.

Remember: Any anti-lock braking system (ABS) helps avoid only the braking skid. Steer the way you want to go.

- Since you can't see as well, you may need to slow down and keep more space between you and other vehicles. It's hard to tell how fast the vehicle ahead is going just by looking at its taillights.
- Slow down, especially on higher speed roads. Your headlights can light up only so much road ahead.
- In remote areas, watch for animals.
- If you're tired, pull off the road in a safe place and rest.

### ***Night Vision***

No one can see as well at night as in the daytime. But as we get older these differences increase. A 50-year-old driver may require at least twice as much light to see the same thing at night as a 20-year-old.

What you do in the daytime can also affect your night vision. For example, if you spend the day in bright sunshine you are wise to wear sunglasses. Your eyes will have less trouble adjusting to night.

But if you're driving, don't wear sunglasses at night. They may cut down on glare from headlights, but they also make a lot of things invisible that should remain visible—such as parked cars, obstacles, pedestrians, or even trains blocking railway crossings. You may want to put on your sunglasses after you have pulled into a brightly-lighted service or refreshment area. Eyes

shielded from that glare may adjust more quickly to darkness back on the road. But be sure to remove your sunglasses before you leave the service area.

You can be temporarily blinded by approaching lights. It can take a second or two, or even several seconds, for your eyes to readjust to the dark. When you are faced with severe glare (as from a driver who doesn't lower the high beams, or a vehicle with misaimed headlights), slow down a little. Avoid staring directly into the approaching lights. If there is a line of opposing traffic, make occasional glances over the line of headlights to make certain that one of the vehicles isn't starting to move into your lane. Once you are past the bright lights, give your eyes time to readjust before resuming speed.



# *Your Driving and the Road*

## ***High Beams***

If the vehicle approaching you has its high beams on, signal by flicking yours to high and then back to low beam. This is the usual signal to lower the headlight beams. If the other driver still doesn't lower the beams, resist the temptation to put your high beams on. This only makes two half-blinded drivers.

On a freeway, use your high beams only in remote areas where you won't impair approaching drivers. In some places, like cities, using high beams is illegal.

When you follow another vehicle on a freeway or highway, use low beams. True, most vehicles now have day-night mirrors that enable the driver to reduce glare. But outside mirrors are not of this type and high beams from behind can bother the driver ahead.

## ***A Few More Night Driving Suggestions***

Keep your windshield and all the glass on your vehicle clean—inside and out. Glare at night is made much worse by dirt on the glass. Even the inside of the glass can build up a film caused by dust. Tobacco smoke also makes inside glass surfaces very filmy and can be a vision hazard if it's left there.

Dirty glass makes lights dazzle and flash more than clean glass would, making the pupils of your eyes contract repeatedly. You might even want to keep a cloth and some glass cleaner in your vehicle if you need to clean your glass frequently.

Remember that your headlights light up far less of a roadway when you are in a turn or curve.

Keep your eyes moving; that way, it's easier to pick out dimly lighted objects.

Just as your headlights should be checked regularly for proper aim, so should your eyes be examined regularly. Some drivers suffer from night blindness—the inability to see in dim light—and aren't even aware of it.



### ***Driving in the Rain***

Rain and wet roads can mean driving trouble. On a wet road you can't stop, accelerate or turn as well because your tire-to-road traction isn't as good as on dry roads. And, if your tires don't have much tread left, you'll get even less traction.

It's always wise to go slower and be cautious if rain starts to fall while you are driving. The surface may get wet suddenly when your reflexes are tuned for driving on dry pavement.

The heavier the rain, the harder it is to see. Even if your windshield wiper blades are in good shape, a heavy rain can make it harder to see road signs and traffic signals, pavement markings, the edge of the road, and even people

walking. Road spray can often be worse for vision than rain, especially if it comes from a dirty road.

So it is wise to keep your wiping equipment in good shape and keep your windshield washer tank filled. Replace your windshield wiper inserts when they show signs of streaking or missing areas on the windshield, or when strips of rubber start to separate from the inserts.



Driving too fast through large water puddles or even going through some car washes can cause problems, too. The water may affect your brakes. Try to avoid puddles. But if you can't, try to slow down before you hit them.

### **CAUTION**



Wet brakes can cause accidents. They won't work well in a quick stop and may cause pulling to one side. You could lose control of the vehicle.

After driving through a large puddle of water or a car wash, apply your brake pedal lightly until your brakes work normally.

# Your Driving and the Road

## Hydroplaning

Hydroplaning is dangerous. So much water can build up under your tires that they can actually ride on the water. This can happen if the road is wet enough and you're going fast enough. When your vehicle is hydroplaning, it has little or no contact with the road.

You might not be aware of hydroplaning. You could drive along for some time without realizing your tires aren't in constant contact with the road. You could find out the hard way: when you have to slow, turn, move out to pass—or if you get hit by a gust of wind. You could suddenly find yourself out of control.

Hydroplaning doesn't happen often. But it can if your tires haven't much tread or if the pressure in one or more is low. It can happen if a lot of water is standing on the road. If you can see reflections from trees, telephone poles, or other vehicles, and raindrops "dimple" the water's surface, there could be hydroplaning.

Hydroplaning usually happens at higher speeds. There just isn't a hard and fast rule about hydroplaning. The best advice is to slow down when it is raining, and be careful.

## Some Other Rainy Weather Tips

- Turn on your headlights—not just your parking lights—to help make you more visible to others.
- Look for hard-to-see vehicles coming from behind. You may want to use your headlights even in daytime if it's raining hard.
- Besides slowing down, allow some extra following distance. And be especially careful when you pass another vehicle. Allow yourself more clear room ahead, and be prepared to have your view restricted by road spray. If the road spray is so heavy you are actually blinded, drop back. Don't pass until conditions improve. Going more slowly is better than having an accident.
- Use your defogger if it helps.
- Have good tires with proper tread depth. (See the *Index* under *Tires*.)





### ***Driving in Fog, Mist and Haze***

Fog can occur with high humidity or heavy frost. It can be so mild that you can see through it for several hundred feet (meters). Or it might be so thick that you can see only a few feet (meters) ahead. It may come suddenly to an otherwise clear road. And it can be a major hazard.

When you drive into a fog patch, your visibility will be reduced quickly. The biggest dangers are striking the vehicle ahead or being struck by the one behind. Try to “read” the fog density down the road. If the vehicle ahead starts to become less clear or, at night, if the taillights are harder to see, the fog is probably thickening. Slow down to give traffic behind you a chance to slow down.

Everybody then has a better chance to avoid hitting the vehicle ahead.

A patch of dense fog may extend only for a few feet (meters) or for miles (kilometers); you can't really tell while you're in it. You can only treat the situation with extreme care.

One common fog condition—sometimes called mist or ground fog—can happen in weather that seems perfect, especially at night or in the early morning in valley and low, marshy areas. You can be suddenly enveloped in thick, wet haze that may even coat your windshield. You can often spot these fog patches or mist layers with your headlights. But sometimes they can be waiting for you as you come over a hill or dip into a shallow valley. Start your windshield wipers and washer to help clear accumulated road dirt. Slow down carefully.

### ***Tips on Driving in Fog***

If you get caught in fog, turn your headlights on low beam, even in daytime. You'll see—and be seen—better.

Don't use your high beams. The light will bounce off the water droplets that make up fog and reflect back at you.

Use your defogger. In high humidity, even a light build-up of moisture on the inside of the glass will cut down on your already limited visibility. Run your windshield wipers and washer occasionally. Moisture can build up on the outside glass, and what seems to be fog may actually be moisture on the outside of your windshield.

Treat dense fog as an emergency. Try to find a place to pull off the road. Of course you want to respect another's property, but you might need to put

# Your Driving and the Road



## ***Tips on Driving in Fog (CONT.)***

something between you and moving vehicles—space, trees, telephone poles, a private driveway, anything that removes you from other traffic.

If visibility is near zero and you must stop but are unsure whether you are away from the road, turn your lights on, start your hazard warning flashers, and sound your horn at intervals or when you hear approaching traffic.

Pass other vehicles in fog only if you can see far enough ahead to pass safely. Even then, be prepared to delay your pass if you suspect the fog is worse up ahead. If other vehicles try to pass you, make it easy for them.

## ***City Driving***

One of the biggest problems with city streets is the amount of traffic on them. You'll want to watch out for what the other drivers are doing and pay attention to traffic signals.

Here are ways to increase your safety in city driving:

- Know the best way to get to where you are going. Try not to drive around trying to pick out a familiar street or landmark. Get a city map and plan your trip into an unknown part of the city just as you would for a cross-country trip.
- Try to use the freeways that rim and crisscross most large cities. You'll save time and energy. (See the next section, *Freeway Driving*.)

- Treat a green light as a warning signal. A traffic light is there because the corner is busy enough to need it. When a light turns green, and just before you start to move, check both ways for vehicles that have not cleared the intersection or may be running the red light.
- Obey all posted speed limits. But remember that they are for ideal road, weather and visibility conditions. You may need to drive below the posted limit in bad weather or when visibility is especially poor.
- Pull to the right (with care) and stop clear of intersections when you see or hear emergency vehicles.





### ***Freeway Driving***

Mile for mile, freeways (also called thruways, parkways, expressways, turnpikes, or superhighways) are the safest of all roads. But they have their own special rules.

The most important advice on freeway driving is: **Keep up with traffic and keep to the right.** Drive at the same speed most of the other drivers are driving. Too-fast or too-slow driving breaks a smooth traffic flow. Treat the left lane on a freeway as a passing lane.

### ***Entering the Freeway***

At the entrance there is usually a ramp that leads to the freeway. If you have a clear view of the freeway as you drive along the entrance ramp, you should begin to check traffic. Try to determine where you expect to blend with the flow. If traffic is light, you may have no problem. But if it is heavy, find a gap as you move along the entering lane and time your approach. Try to merge into the gap at close to the prevailing speed. Switch on your turn signal, check your rearview mirrors as you move along, and glance over your shoulder as often as necessary. Try to blend smoothly with the traffic flow.

### ***Driving on the Freeway***

Once you are on the freeway, adjust your speed to the posted limit or to the prevailing rate if it's slower. Stay in the right lane unless you want to pass. If you are on a two-lane freeway, treat the right lane as the slow lane and the left lane as the passing lane.

If you are on a three-lane freeway, treat the right lane as the slower-speed through lane, the middle lane as the higher-speed through lane, and the left lane as the passing lane.

Before changing lanes, check your rearview mirrors. Then use your turn signal. Just before you leave the lane, glance quickly over your shoulder to make sure there isn't another vehicle in your "blind" spot.



## *Your Driving and the Road*

### ***Driving on the Freeway (CONT.)***

If you are moving from an outside to a center lane on a freeway having more than two lanes, make sure another vehicle isn't about to move into the same spot. Look at the vehicles two lanes over and watch for telltale signs: turn signals flashing, an increase in speed, or moving toward the edge of the lane. Be prepared to delay your move.

Once you are moving on the freeway, make certain you allow a reasonable following distance. Expect to move slightly slower at night.

### ***Leaving the Freeway***

When you want to leave the freeway, move to the proper lane well in advance. Dashing across lanes at the last minute is dangerous. If you miss your exit do not, under any circumstances, stop and back up. Drive on to the next exit.

At each exit point is a deceleration lane. Ideally it should be long enough for you to enter it at freeway speed (after signaling, of course) and then do your braking before moving onto the exit ramp. Unfortunately, not all deceleration lanes are long enough—some are too short for all the braking. Decide when to start braking. If you must brake on the through lane, and if there is traffic close behind you, you can allow a little

extra time and flash your brake lights (in addition to your turn signal) as extra warning that you are about to slow down and exit.

The exit ramp can be curved, sometimes quite sharply. The exit speed is usually posted. Reduce your speed according to your speedometer, not to your sense of motion. After driving for any distance at higher speeds, you may tend to think you are going slower than you actually are. For example, 40 mph (65 km/h) might seem like only 20 mph (32 km/h). Obviously, this could lead to serious trouble on a ramp designed for 20 mph (32 km/h)!

## ***Driving a Long Distance***

Although most long trips today are made on freeways, there are still many made on regular highways.

Long-distance driving on freeways and regular highways is the same in some ways. The trip has to be planned and the vehicle prepared, you drive at higher-than-city speeds, and there are longer turns behind the wheel. You'll enjoy your trip more if you and your vehicle are in good shape. Here are some tips for a successful long trip.

## ***Before Leaving on a Long Trip***

Make sure you're ready. Try to be well rested. If you must start when you're not fresh—such as after a day's work—don't plan to make too many miles that first part of the journey. Wear comfortable clothing and shoes you can easily drive in.

Is your vehicle ready for a long trip? If you keep it serviced and maintained, it's ready to go. If it needs service, have it done before starting out. Of course, you'll find experienced and able service experts in Oldsmobile dealerships all across North America. They'll be ready and willing to help if you need it.

Here are some things you can check before a trip:

- **Windshield Washer Fluid:** Is the reservoir full? Are all windows clean inside and outside?

- **Wiper Blades:** Are they in good shape?
- **Fuel, Engine Oil, Other Fluids:** Have you checked all levels?
- **Lights:** Are they all working? Are the lenses clean?
- **Tires:** They are vitally important to a safe, trouble-free trip. Is the tread good enough for long-distance driving? Are the tires all inflated to the recommended pressure?
- **Weather Forecasts:** What's the weather outlook along your route? Should you delay your trip a short time to avoid a major storm system?
- **Maps:** Do you have up-to-date maps?

# Your Driving and the Road

## On the Road

Unless you are the only driver, it is good to share the driving task with others. Limit turns behind the wheel to about 100 miles (160 km) or two hours at a sitting. Then, either change drivers or stop for some refreshment like coffee, tea or soft drinks and some limbering up. But do stop and move around. Eat lightly along the way. Heavier meals tend to make some people sleepy.

On two-lane highways or undivided multilane highways that do not have controlled access, you'll want to watch for some situations not usually found on freeways. Examples are: stop signs and signals, shopping centers with direct access to the highway, no passing zones and school zones, vehicles turning left and right off the road, pedestrians, cyclists, parked vehicles, and even animals.

## Highway Hypnosis

Is there actually such a condition as "highway hypnosis"? Or is it just plain falling asleep at the wheel? Call it highway hypnosis, lack of awareness, or whatever.

There is something about an easy stretch of road with the same scenery, along with the hum of the tires on the road, the drone of the engine, and the rush of the wind against the vehicle that can make you sleepy. Don't let it happen to you! If it does, your vehicle can leave the road in **less than a second**, and you could crash and be injured.

What can you do about highway hypnosis? First, be aware that it can happen.


Then here are some tips:

- Make sure your vehicle is well ventilated, with a comfortably cool interior.

- Keep your eyes moving. Scan the road ahead and to the sides. Check your rearview mirrors frequently and your instruments from time to time. This can help you avoid a fixed stare.
- Wear good sunglasses in bright light. Glare can cause drowsiness. But don't wear sunglasses at night. They will drastically reduce your overall vision at the very time you need all the seeing power you have.
- If you get sleepy, pull off the road into a rest, service, or parking area and take a nap, get some exercise, or both. For safety, treat drowsiness on the highway as an emergency.

As in any driving situation, keep pace with traffic and allow adequate following distances.



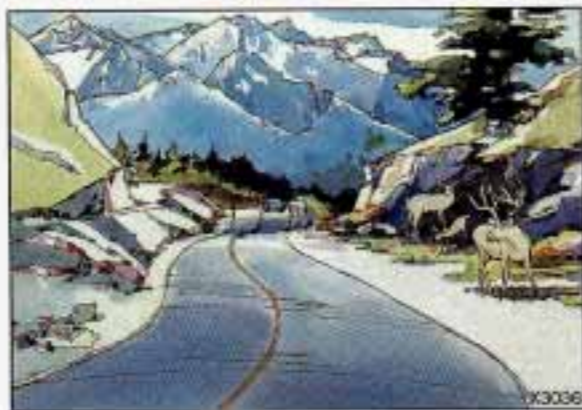

## Hill and Mountain Roads

Driving on steep hills or mountains is different from driving in flat or rolling terrain. If you drive regularly in steep country, or if you're planning to visit there, here are some tips that can make your trips safer and more enjoyable.

- Keep your vehicle in good shape. Check all fluid levels and also the brakes, tires, cooling system and transaxle. These parts can work hard on mountain roads.
- Know how to go down hills. The most important thing to know is this: let your engine do some of the slowing down. Don't make your brakes do it all. Shift to a lower gear when you go down a steep or long hill. That way, you will slow down without excessive use of your brakes.

### CAUTION



If you don't shift down, your brakes could get so hot that they wouldn't work well. You would then have poor braking or even none going down a hill. You could crash. Shift down to let your engine assist your brakes on a steep downhill slope.

### CAUTION



Coasting downhill in N (Neutral) or with the ignition off is dangerous. Your brakes will have to do all the work of slowing down. They could get so hot that they wouldn't work well. You could crash. Always have your engine running and your vehicle in gear when you go downhill.

- Know how to go uphill. Shift down to **D** (Drive). This will help cool your engine and transaxle, and you can climb the hill better.
- Stay in your own lane when driving on two-lane roads in hills or mountains. Don't swing wide or cut across the center of the road. Drive at speeds that let you stay in your own lane. That way, you won't be surprised by a vehicle coming toward you in the same lane.
- It takes longer to pass another vehicle when you're going uphill. You'll want to leave extra room to pass. If a vehicle is passing you and doesn't have enough room, slow down to make it easier for the other vehicle to get by.

# Your Driving and the Road



## ***Hill and Mountain Roads (CONT.)***

- As you go over the top of a hill, be alert. There could be something in your lane, like a stalled car or an accident.
- You may see highway signs on mountains that warn of special problems. Examples are long grades, passing or no passing zones, a falling rocks area, or winding roads. Be alert to these and take appropriate action.
- Winter driving can present special problems. See the *Index* under *Winter Driving*.

## ***Parking on Hills***

Hills and mountains mean spectacular scenery. But please be careful where you stop if you decide to look at the view or take pictures. Look for pull-offs or parking areas provided for scenic viewing.

Another part of this manual tells how to use your parking brake (see the *Index* under *Parking Brake*). But on a mountain or steep hill, you can do one more thing. You can turn your front wheels to keep your vehicle from rolling downhill or out into traffic.

Here's how:

## ***Parking Downhill***

Turn your wheels to the right.

You don't have to jam your tires against the curb, if there is a curb. A gentle contact is all you need.





### **Parking Uphill**

If there is a curb, turn your wheels to the left if the curb is at the right side of your vehicle.



If you're going uphill on a one-way street and you're parking on the left side, your wheels should point to the right.



If there is no curb when you're parking uphill, turn the wheels to the right.  
If there is no curb when you're parking uphill on the left side of a one-way street, your wheels should be turned to the left.



# Your Driving and the Road



## Torque Lock

If you are parking on a hill and you don't shift your transaxle into **P** (Park) properly, the weight of the vehicle may put too much force on the parking pawl in the transaxle. You may find it difficult to pull the shift lever out of **P** (Park). This is called "torque lock." To prevent torque lock, always be sure to shift into **P** (Park) properly before you leave the driver's seat. To find out how, see the *Index* under *Shifting Into P (Park)*.

When you are ready to drive, move the shift lever out of **P** (Park) **before** you release the parking brake.

If "torque lock" does occur, you may need to have another vehicle push yours a little uphill to take some of the pressure from the transaxle, so you can pull the shift lever out of **P** (Park).

## Winter Driving

Here are some tips for winter driving:

- Have your Oldsmobile in good shape for winter. Be sure your engine coolant mix is correct.
- Snow tires can help in loose snow, but they may give you less traction on ice than regular tires. If you do not expect to be driving in deep snow, but may have to travel over ice, you may not want to switch to snow tires at all.

- You may want to put winter emergency supplies in your trunk. Include an ice scraper, a small brush or broom, a supply of windshield washer fluid, a rag, some winter outer clothing, a small shovel, a flashlight, a red cloth, and a couple of reflective warning triangles. And, if you will be driving under severe conditions, include a small bag of sand, a piece of old carpet or a couple of burlap bags to help provide traction. Be sure you properly secure these items in your vehicle.



### ***Driving on Snow or Ice***

Most of the time, those places where your tires meet the road probably have good traction.

However, if there is snow or ice between your tires and the road, you can have a very slippery situation. You'll have a lot less traction or "grip" and will need to be very careful.

What's the worst time for this? "Wet ice." Very cold snow or ice can be slick and hard to drive on. But wet ice can be even more trouble because it may offer the least traction of all. You can get wet ice when it's about freezing (32°F, 0°C) and freezing rain begins to fall. Try to avoid driving on wet ice until salt and sand crews can get there.

Whatever the condition—smooth ice, packed, blowing or loose snow—drive with caution. Accelerate gently, too. Try not to break the fragile traction. If you accelerate too fast, the drive wheels will spin and polish the surface under the tires even more.

Your anti-lock brakes improve your ability to make a hard stop on a slippery road. Even though you have the anti-lock braking system, you'll want to begin stopping sooner than you would on dry pavement. See the *Index* under *Anti-Lock Brake System*.

- Allow greater following distance on any slippery road.
- Watch for slippery spots. The road might be fine until you hit a spot that's covered with ice. On an otherwise clear road, ice patches may appear in shaded areas where the sun can't reach: around clumps of trees, behind buildings, or under bridges. Sometimes the surface of a curve or an overpass may remain icy when the surrounding roads are clear. If you see a patch of ice ahead of you, brake before you are on it. Try not to brake while you're actually on the ice, and avoid sudden steering maneuvers.



## Your Driving and the Road



### *If You're Caught in a Blizzard*

If you are stopped by heavy snow, you could be in a serious situation. You should probably stay with your vehicle unless you know for sure that you are near help and you can hike through the snow. Here are some things to do to summon help and keep yourself and your passengers safe:

- Turn on your hazard flashers.
- Tie a red cloth to your vehicle to alert police that you've been stopped by the snow.
- Put on extra clothing or wrap a blanket around you. If you have no blankets or extra clothing, make body insulators from newspapers, burlap bags, rags, floor mats—anything you can wrap around yourself or tuck under your clothing to keep warm.
- You can run the engine to keep warm, but be careful.

### **CAUTION**



Snow can trap exhaust gases under your vehicle. This can cause deadly CO (carbon monoxide) gas to get inside. CO could overcome you and kill you. You can't see it or smell it, so you might not know it was in your vehicle. Clear away snow from around the base of your vehicle, especially any that is blocking your exhaust pipe. And check around again from time to time to be sure snow doesn't collect there.

Open a window just a little on the side of the vehicle that's away from the wind. This will help keep CO out.



Run your engine only as long as you must. This saves fuel. When you run the engine, make it go a little faster than just idle. That is, push the accelerator slightly. This uses less fuel for the heat that you get and it keeps the battery charged. You will need a well-charged battery to restart the vehicle and possibly for signaling later on with your headlights. Let the heater run for a while.

Then, shut the engine off and close the window almost all the way to preserve the heat. Start the engine again and repeat this only when you feel really uncomfortable from the cold. But do it as little as possible. Preserve the fuel as long as you can. To help keep warm, you can get out of the vehicle and do some fairly vigorous exercises every half-hour or so until help comes.

### ***If You're Stuck in Deep Snow***

This manual explains how to get the vehicle out of deep snow without damaging it. See the *Index* under *Rocking Your Vehicle*.

### ***Towing a Trailer***

#### **CAUTION**



If you don't use the correct equipment and drive properly, you can lose control when you pull a trailer. For example, if the trailer is too heavy, the brakes may not work well—or even at all. You and your passengers could be seriously injured. Pull a trailer only if you have followed all the steps in this section.

#### **NOTICE**

Pulling a trailer improperly can damage your vehicle and result in costly repairs not covered by your warranty. To pull a trailer correctly, follow the advice in this section.

# Your Driving and the Road

## **Towing a Trailer (CONT.)**

Your Oldsmobile can tow a trailer. To identify what the vehicle trailering capacity is for your vehicle, you should read the information in *Weight of the Trailer* that appears later in this section. But trailering is different than just driving your vehicle by itself. Trailering means changes in handling, durability, and fuel economy. Successful, safe trailering takes correct equipment, and it has to be used properly.

That's the reason for this section. In it are many time-tested, important trailering tips and safety rules. Many of these are important for your safety and that of your passengers. So please read this section carefully before you pull a trailer.

Load-pulling components such as the engine, transaxle, wheel assemblies, and tires are forced to work harder against the drag of the added weight. The engine is required to operate at relatively higher speeds and under greater loads, generating extra heat.

What's more, the trailer adds considerably to wind resistance, increasing the pulling requirements.

All of this means changes in:

- Handling
- Durability
- Fuel economy

## **If You Do Decide to Pull a Trailer**

If you do, here are some important points.

- There are many different laws having to do with trailering. Make sure your rig will be legal, not only where you live but also where you'll be driving. A good source for this information can be state or provincial police.
- Consider using a sway control if your trailer will weigh 2,000 pounds (900 kg) or less. You should always use a sway control if your trailer will weigh more than 2,000 pounds (900 kg). You can ask a hitch dealer about sway controls.
- Don't tow a trailer at all during the first 500 miles (800 km) your new vehicle is driven. Your engine, axle or other parts could be damaged.

- Then, during the first 500 miles (800 km) that you tow a trailer, don't drive over 50 mph (80 km/h) and don't make starts at full throttle. This helps your engine and other parts of your vehicle wear in at the heavier loads.
- Three important considerations have to do with weight:

### **Weight of the Trailer**

How heavy can a trailer safely be?

It should never weigh more than 1,000 pounds (450 kg) unless you have the special optional 3,000 pound (1360 kg) towing package. But even that can be too heavy. It depends on how you plan to use your rig. For example, speed, altitude, road grades, outside temperature and how much your vehicle is used to pull a trailer are all important. And, it can also depend on any special equipment that you have on your vehicle. You can ask your dealer for our trailering information or advice, or you can write us at:


Oldsmobile Customer Assistance  
Network  
P.O. Box 30095  
Lansing, MI 48909

In Canada, write to:

General Motors of Canada Limited  
Customer Assistance Center  
1908 Colonel Sam Drive  
Oshawa, Ontario, L1H 8P7



## Your Driving and the Road

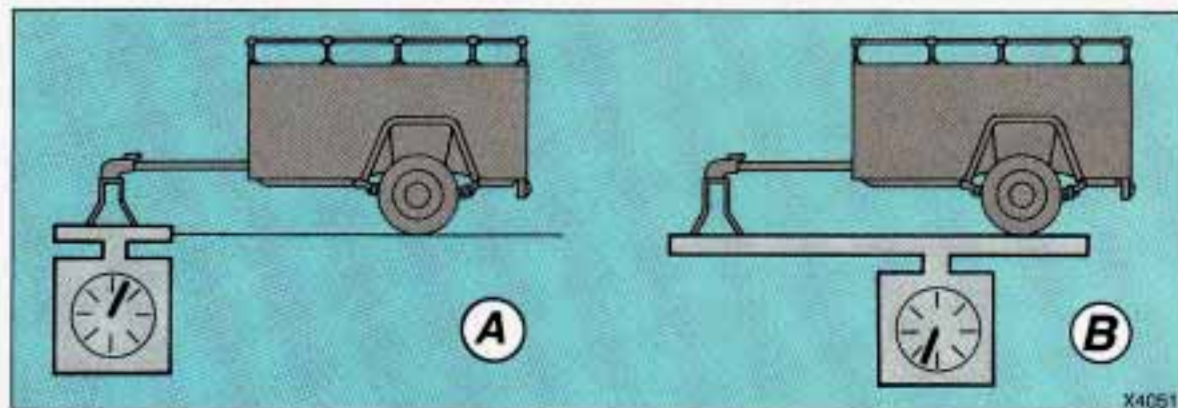

### ***If You Do Decide to Pull a Trailer (CONT.)***

#### **Weight of the Trailer Tongue**

The tongue load (A) of any trailer is an important weight to measure because it affects the total capacity weight of your vehicle. The capacity weight includes the curb weight of the vehicle, any cargo you may carry in it, and the people who will be riding in the vehicle. And if you will tow a trailer, you must subtract the tongue load from your vehicle's capacity weight because your vehicle will be carrying that weight, too. See the *Index* under *Loading Your Vehicle* for more information about your vehicle's maximum load capacity.

If you're using a "dead-weight" hitch, the trailer tongue (A) should weigh 10% of the total loaded trailer weight (B). If you have a "weight-distributing" hitch, the trailer tongue (A) should weigh 12% of the total loaded trailer weight (B).

After you've loaded your trailer, weigh the trailer and then the tongue, separately, to see if the weights are proper. If they aren't, you may be able to get them right simply by moving some items around in the trailer.

#### **Total Weight on Your Vehicle's Tires**

Be sure your vehicle's tires are inflated to the limit for cold tires. You will find these numbers on the Certification label at the rear edge of the driver's door (or, see the *Index* under *Tire Loading*. Then be sure you don't go over the GVW limit for your vehicle).

## Hitches

It's important to have the correct hitch equipment. Crosswinds, large trucks going by, and rough roads are a few reasons why you'll need the right hitch. Here are some rules to follow:

- If you'll be pulling a trailer that, when loaded, will weigh more than 2,000 pounds (900 kg), be sure to use a properly mounted, weight-distributing hitch and sway control of the proper size. This equipment is very important for proper vehicle loading and good handling when you're driving.

- Will you have to make any holes in the body of your vehicle when you install a trailer hitch? If you do, then be sure to seal the holes later when you remove the hitch. If you don't seal them, deadly carbon monoxide (CO) from your exhaust can get into your vehicle. (See the *Index* under *Carbon Monoxide in Exhaust*.) Dirt and water can, too.

## Safety Chains

You should always attach chains between your vehicle and your trailer. Cross the safety chains under the tongue of the trailer so that the tongue will not drop to the road if it becomes separated from the hitch. Instructions about safety chains may be provided by the hitch manufacturer or by the trailer manufacturer. Follow the manufacturer's recommendation for attaching safety chains. Always leave just enough slack so you can turn with your rig. And, never allow safety chains to drag on the ground.

# *Your Driving and the Road*

## **Trailer Brakes**

If your trailer weighs more than 1,000 pounds (450 kg) loaded, then it needs its own brakes—and they must be adequate. Be sure to read and follow the instructions for the trailer brakes so you'll be able to install, adjust and maintain them properly.

Because you have anti-lock brakes, do not try to tap into your vehicle's brake system. If you do, both brake systems won't work well, or at all.

## **Driving with a Trailer**

Towing a trailer requires a certain amount of experience. Before setting out for the open road, you'll want to get to know your rig. Acquaint yourself with the feel of handling and braking with the added weight of the trailer. And always keep in mind that the vehicle you are driving is now a good deal longer and not nearly so responsive as your vehicle is by itself.

Before you start, check the trailer hitch and platform, safety chains, electrical connector, lights, tires and mirror adjustment. If the trailer has electric brakes, start your vehicle and trailer moving and then apply the trailer brake controller by hand to be sure the brakes are working. This lets you check your electrical connection at the same time. During your trip, check occasionally to be sure that the load is secure, and that the lights and any trailer brakes are still working.

## **Following Distance**

Stay at least twice as far behind the vehicle ahead as you would when driving your vehicle without a trailer. This can help you avoid situations that require heavy braking and sudden turns.

## **Passing**

You'll need more passing distance up ahead when you're towing a trailer. And, because you're a good deal longer, you'll need to go much farther beyond the passed vehicle before you can return to your lane.

## **Backing Up**

Hold the bottom of the steering wheel with one hand. Then, to move the trailer to the left, just move that hand to the left. To move the trailer to the right, move your hand to the right. Always back up slowly and, if possible, have someone guide you.



### **Making Turns**

When you're turning with a trailer, make wider turns than normal. Do this so your trailer won't strike soft shoulders, curbs, road signs, trees, or other objects. Avoid jerky or sudden maneuvers. Signal well in advance.

### **Turn Signals When Towing a Trailer**

When you tow a trailer, your vehicle has to have a different turn signal flasher and extra wiring. The green arrows on your instrument panel will flash whenever you signal a turn or lane change. Properly hooked up, the trailer lights will also flash, telling other drivers you're about to turn, change lanes or stop.

When towing a trailer, the green arrows on your instrument panel will flash for turns even if the bulbs on the trailer are burned out. Thus, you may think drivers behind you are seeing your signal when they are not. It's important to check occasionally to be sure the trailer bulbs are still working. Your vehicle may have bulb warning lights. When you plug trailer lights into your vehicle's lighting system, its bulb warning lights may not let you know if one of your lights goes out. So, when you have trailer lights plugged in, be sure to check your vehicle and trailer lights from time to time to be sure they're all working. Once you disconnect the trailer lights, the bulb warning lights again can tell you if one of your vehicle lights is out.

### **Driving On Grades**

Reduce speed and shift to a lower gear **before** you start down a long or steep downgrade. If you don't shift down, you might have to use your brakes so much that they would get hot and no longer work well.

On a long uphill grade, shift down to **D** (Drive) and reduce your speed to around 45 mph (70 km/h) to reduce the possibility of engine and transaxle overheating.

If you are towing a trailer that weighs more than 1,000 pounds (450 kg), and you have an automatic transaxle with Overdrive, you may prefer to drive in **D** instead of Overdrive.

# Your Driving and the Road

## ***Driving with a Trailer (CONT.)***

### **Parking on Hills**

You really should not park your vehicle, with a trailer attached, on a hill. If something goes wrong, your rig could start to move. People can be injured, and both your vehicle and the trailer can be damaged.

But if you ever have to park your rig on a hill, here's how to do it:

1. Apply your regular brakes, but don't shift into **P** (Park) yet.

2. Have someone place chocks under the trailer wheels.
3. When the wheel chocks are in place, release the regular brakes until the chocks absorb the load.
4. Reapply the regular brakes. Then apply your parking brake, and then shift to **P** (Park).
5. Release the regular brakes.

### **When You Are Ready to Leave After Parking on a Hill**

1. Apply your regular brakes and hold the pedal down while you:
  - Start your engine;
  - Shift into a gear; and
  - Release the parking brake.
2. Let up on the brake pedal.
3. Drive slowly until the trailer is clear of the chocks.
4. Stop and have someone pick up and store the chocks.

### ***Maintenance When Trailer Towing***

Your vehicle will need service more often when you're pulling a trailer. See the Maintenance Schedule for more on this. Things that are especially important in trailer operation are automatic transaxle fluid (don't overfill), engine oil, belts, cooling system, and brake adjustment. Each of these is covered in this manual, and the *Index* will help you find them quickly. If you're trailering, it's a good idea to review these sections before you start your trip.

Check periodically to see that all hitch nuts and bolts are tight.



# Notes



X5077

## *Part 5*

# *Problems on the Road*

Here you'll find what to do about some problems that can occur on the road.

Hazard Warning Flashers .....	194
Jump Starting .....	195
Towing Your Oldsmobile .....	199
Engine Overheating .....	203
If a Tire Goes Flat .....	209
Changing a Flat Tire .....	209
Compact Spare Tire .....	217
If You're Stuck: In Sand, Mud, Ice or Snow .....	218

## *Problems on the Road*



### ***Hazard Warning Flashers***

Your hazard warning flashers let you warn others. They also let police know you have a problem. Your front and rear turn signal lights will flash on and off.



Press the button in to make your front and rear turn signal lights flash on and off.

Your hazard warning flashers work no matter what position your key is in, and even if the key isn't in.



To turn off the flashers, pull out on the collar.

When the hazard warning flashers are on, your turn signals won't work.

### ***Other Warning Devices***

If you carry reflective triangles, you can set one up at the side of the road about 300 feet (100 m) behind your vehicle.



## Jump Starting

If your battery has run down, you may want to use another vehicle and some jumper cables to start your Oldsmobile. But please follow the steps here to do it safely.

### CAUTION



Batteries can hurt you. They can be dangerous because:

- They contain **acid** that can burn you.
- They contain **gas** that can explode or ignite.
- They contain enough **electricity** to burn you.

If you don't follow these steps exactly, some or all of these things can hurt you.

### NOTICE

Ignoring these steps could result in costly damage to your vehicle that wouldn't be covered by your warranty.

Trying to start your Oldsmobile by pushing or pulling it won't work, and it could damage your vehicle.

### To Jump Start Your Oldsmobile:

1. Check the other vehicle. It must have a 12-volt battery with a negative ground system.

### NOTICE

If the other system isn't a 12-volt system with a negative ground, both vehicles can be damaged.

## Problems on the Road

### Jump Starting (CONT.)

2. Get the vehicles close enough so the jumper cables can reach, but be sure the vehicles aren't touching each other. If they are, it could cause a ground connection you don't want. You wouldn't be able to start your Oldsmobile, and the bad grounding could damage the electrical systems.

#### CAUTION



You could be injured if the vehicles roll. Set the parking brake firmly on each vehicle. Put an automatic transaxle in **P** (Park) or a manual transaxle in **N** (Neutral).

3. Turn off the ignition on both vehicles. Turn off all lights that aren't needed, and radios. This will avoid sparks and help save both batteries. And it could save your radio!

#### NOTICE

If you leave your radio on, it could be badly damaged. The repairs wouldn't be covered by your warranty.

4. Open the hoods and locate the batteries.


#### CAUTION



An electric fan can start up even when the engine is not running and can injure you. Keep hands, clothing and tools away from any underhood electric fan.

Find the positive (+) and negative (-) terminals on each battery.

## CAUTION

 Using a match near a battery can cause battery gas to explode. People have been hurt doing this, and some have been blinded. Use a flashlight if you need more light.


Be sure the batteries have enough water. You don't need to add water to the Delco Freedom® battery installed in every new GM vehicle. But if a battery has filler caps, be sure the right amount of fluid is there. If it is low, add water to take care of that first. If you don't, explosive gas could be present.

Battery fluid contains acid that can burn you. Don't get it on you. If you accidentally get it in your eyes or on your skin, flush the place with water and get medical help immediately.

5. Check that the jumper cables don't have loose or missing insulation. If they do, you could get a shock. The vehicles could be damaged, too.


Before you connect the cables, here are some things you should know. Positive (+) will go to positive (+) and negative (-) will go to negative (-) or a metal engine part. Don't connect (+) to (-) or you'll get a short that would damage the battery and maybe other parts, too.

## CAUTION

 Fans or other moving engine parts can injure you badly. Keep your hands away from moving parts once the engines are running.




## Problems on the Road

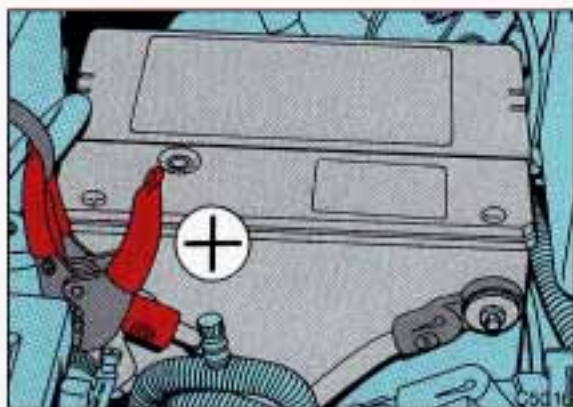

### Jump Starting (CONT.)


6. Connect the red positive (+) cable to the positive (+) terminal of the vehicle with the dead battery. Use a remote positive (+) terminal if the vehicle has one.

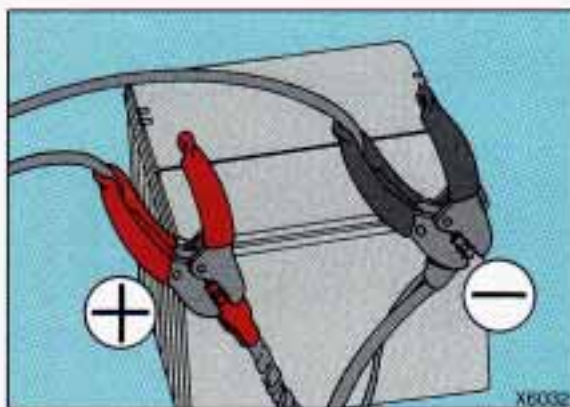

7. Don't let the other end touch metal. Connect it to the positive (+) terminal of the good battery. Use a remote positive (+) terminal if the vehicle has one.

8. Now connect the black negative (-) cable to the good battery's negative (-) terminal.


Don't let the other end touch anything until the next step. The other end of the negative cable **doesn't** go to the dead battery. It goes to a heavy unpainted metal part on the engine of the vehicle with the dead battery.

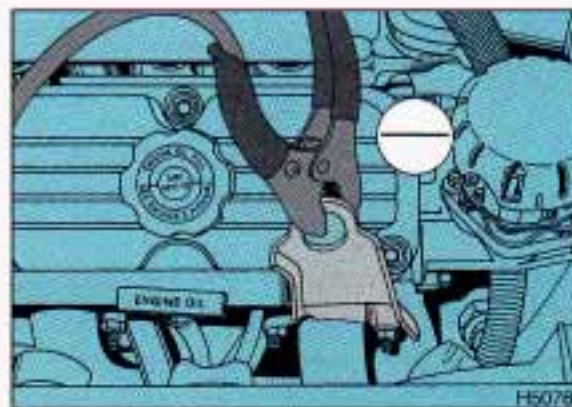


9. Attach the cable at least 18 inches (45 cm) away from the dead battery, but not near engine parts that move. The electrical connection is just as good there, but the chance of sparks getting back to the battery is much less.

10. Now start the vehicle with the good battery and run the engine for a while.

11. Try to start the vehicle with the dead battery. If it won't start after a few tries, it probably needs service.

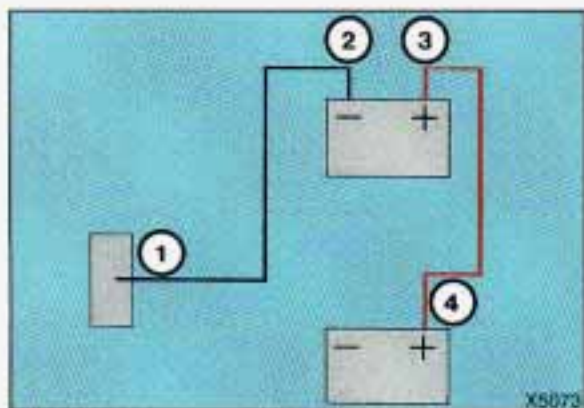

12. Remove the cables in reverse order to prevent electrical shorting. Take care that they don't touch each other or any other metal.

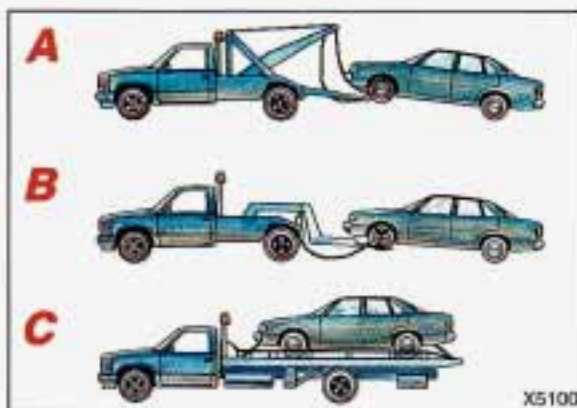

### ***Towing Your Oldsmobile***

Try to have a GM dealer or a professional towing service tow your Oldsmobile. The usual towing equipment is:

- (A) Sling-type tow truck
- (B) Wheel-lift tow truck
- (C) Car carrier

If your vehicle has been changed or modified since it was factory-new by adding aftermarket items like fog lamps, aero skirting, or special tires and wheels, these instructions and illustrations may not be correct.

Before you do anything, turn on the hazard warning flashers.


When you call, tell the towing service:

- That your vehicle can only be towed with certain equipment, as described later in this section.
- That your vehicle has front-wheel drive.
- The make, model, and year of your vehicle.
- Whether you can still move the shift lever.
- If there was an accident, what was damaged.

When the towing service arrives, let the tow operator know that this manual contains detailed towing instructions and illustrations. The operator may want to see them.



## Problems on the Road

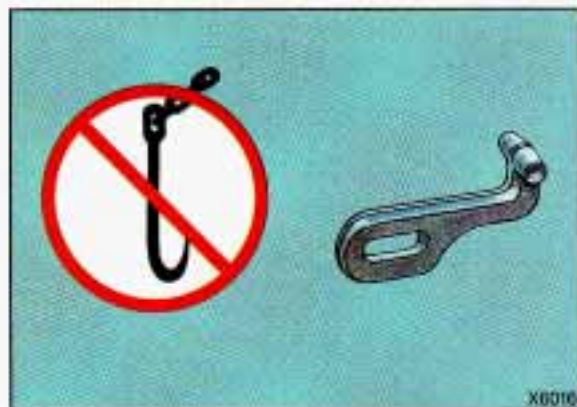

### Towing Your Oldsmobile (CONT.)

#### CAUTION



To help avoid injury to you or others:

- Never let passengers ride in a vehicle that is being towed.
- Never tow faster than safe or posted speeds.
- Never tow with damaged parts not fully secured.
- Never get under your vehicle after it has been lifted by the tow truck.
- Always use separate safety chains on each side when towing a vehicle.
- Never use "J" hooks. Use T-hooks instead.

When your vehicle is being towed, have the ignition key off. The steering wheel should be clamped in a straight-ahead position, with a clamping device designed for towing service. Do not use the vehicle's steering column lock for this. The transaxle should be in Neutral, and the parking brake released.

Don't have your vehicle towed on the front wheels, unless you must. If the vehicle must be towed on the front wheels, don't go more than 35 mph (56 km/h) or farther than 50 miles (80 km) or your transaxle will be damaged. If these limits must be exceeded, then the front wheels have to be supported on a dolly.

#### CAUTION



A vehicle can fall from a car carrier if it isn't properly secured. This can cause a collision, serious personal injury and vehicle damage. The vehicle should be tightly secured with chains or steel cables before it is transported.

Don't use substitutes (ropes, leather straps, canvas webbing, etc.) that can be cut by sharp edges underneath the towed vehicle.





### ***Towing from the Front— Vehicle Hook-up***

Before hooking up to a tow truck, be sure to read all the information on *Towing Your Oldsmobile* earlier in this section.

1. Attach T-hook chains into the bottom slots in the cradle behind the front wheels, on both sides.




2. Across sling chains, position a 4x4 wood beam against bottom of radiator support behind the front bumper.



3. Attach a separate safety chain around the outboard end of each control arm.


## Problems on the Road

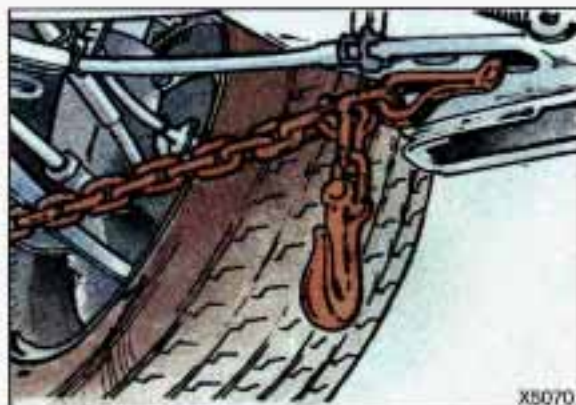

### **Towing from the Rear— Vehicle Hook-up**

Before hooking up to a tow truck, be sure to read all the information on *Towing Your Oldsmobile* earlier in this section.

1. Attach T-hook chains on both sides in the slotted holes in the floor pan support rails just ahead of the rear wheels.

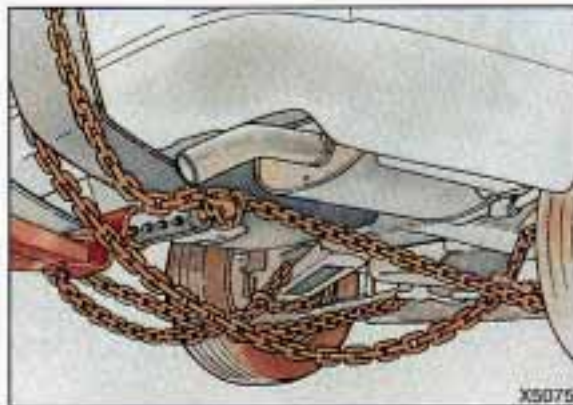

2. Position the lower sling crossbar directly under the rear bumper.



3. Attach a separate safety chain around the outboard end of each lower control arm.





## Engine Overheating

You will find a coolant temperature gage or warning light about a hot engine on your Oldsmobile's instrument panel. If you have the Electronic Cluster or LSS Cluster, your information center will also display messages about engine overheating. See the *Index* under *Coolant Temperature Gage* or *Coolant Temperature Warning Light*.

### NOTICE

If your engine catches fire because you keep driving with no coolant, your vehicle can be badly damaged. The costly repairs would not be covered by your warranty.

If Steam is Coming from Your Engine:

### CAUTION



Steam from an overheated engine can burn you badly, even if you just open the hood. Stay away from the engine if you see or hear steam coming from it. Just turn it off and get everyone away from the vehicle until it cools down. Wait until there is no sign of steam or coolant before opening the hood.

If you keep driving when your engine is overheated, the liquids in it can catch fire. You or others could be badly burned. Stop your engine if it overheats, and get out of the vehicle until the engine is cool.

If No Steam is Coming from Your Engine:

If you get the overheat warning but see or hear no steam, the problem may not be too serious. Sometimes the engine can get a little too hot when you:

- Climb a long hill on a hot day.
- Stop after high speed driving.
- Idle for long periods in traffic.
- Tow a trailer.



## Problems on the Road

### Engine Overheating (CONT.)

If you get the overheat warning with no sign of steam, try this for a minute or so:


1. Turn off your air conditioner.
2. Turn on your heater to full hot at the highest fan speed and open the window if necessary.
3. If you're in a traffic jam, shift to N (Neutral).

If you no longer have the overheat warning, you can drive. Just to be safe, drive slower for about ten minutes. If the warning doesn't come back on, you can drive normally.

If the warning continues, pull over, stop, and park your vehicle right away.

If there's still no sign of steam, you can idle the engine for two or three minutes while you're parked, to see if the warning stops.

But then, if you still have the warning, **TURN OFF THE ENGINE AND GET EVERYONE OUT OF THE VEHICLE** until it cools down. You may decide not to lift the hood but to get service help right away.

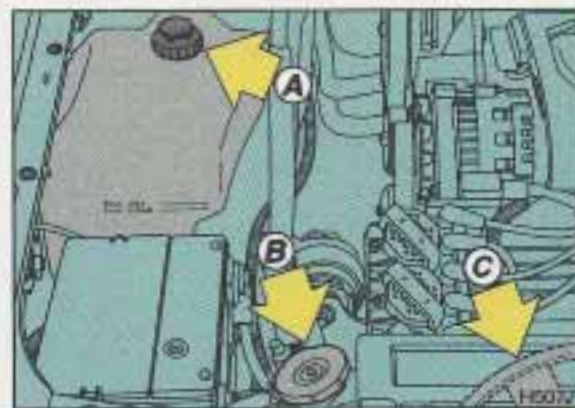


### Cooling System


When you decide it's safe to lift the hood, here's what you'll see:

- (A) Coolant recovery tank
- (B) Radiator pressure cap
- (C) Electric engine fan

### CAUTION


 An electric fan under the hood can start up even when the engine is not running and can injure you. Keep hands, clothing and tools away from any underhood electric fan.

If the coolant inside the coolant recovery tank is boiling, don't do anything else until it cools down.

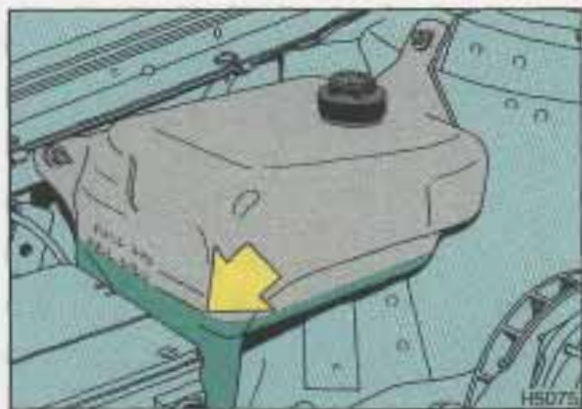

The coolant level should be at or above the **FULL COLD** mark. If it isn't, you may have a leak in the radiator hoses, heater hoses, radiator, water pump or somewhere else in the cooling system.

### CAUTION

 Heater and radiator hoses, and other engine parts, can be very hot. Don't touch them. If you do, you can be burned.

Don't run the engine if there is a leak. If you run the engine, it could lose all coolant. That could cause an engine fire, and you could be burned. Get any leak fixed before you drive the vehicle.

### NOTICE

Engine damage from running your engine without coolant isn't covered by your warranty.

If there seems to be no leak, check to see if the electric engine fan is running. If the engine is overheating, the fan should be running. If it isn't, your vehicle needs service.

#### How to Add Coolant to the Coolant Recovery Tank:


If you haven't found a problem yet, but the coolant level isn't up to the **FULL COLD** mark, add a 50/50 mixture of clean water (preferably distilled) and a proper antifreeze at the coolant recovery tank. (See the *Index* under *Coolant* for more information about the proper coolant mix.)

### CAUTION

 Adding only plain water to your cooling system can be dangerous. Plain water, or some other liquid like alcohol, can boil before the proper coolant mix will. Your vehicle's coolant warning system is set for the proper coolant mix. With plain water or the wrong mix, your engine could get too hot but you wouldn't get the overheat warning. Your engine could catch fire and you or others could be burned. Use a 50/50 mix of **clean water** and a proper antifreeze.



## Problems on the Road

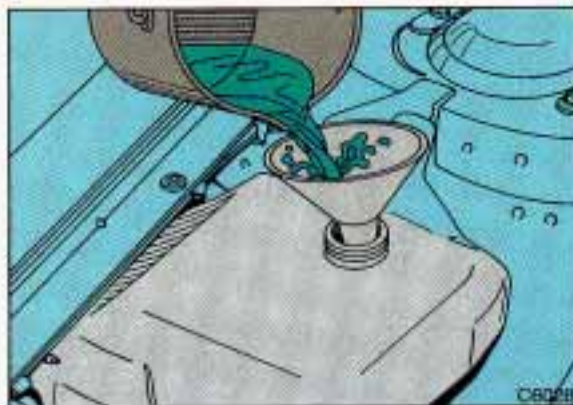

### Engine Overheating (CONT.)

#### NOTICE

In cold weather, water can freeze and crack the engine, radiator, heater core and other parts. Use the recommended coolant.

#### CAUTION



You can be burned if you spill coolant on hot engine parts. Coolant contains ethylene glycol and it will burn if the engine parts are hot enough. Don't spill coolant on a hot engine.




When the coolant in the coolant recovery tank is at or above **FULL COLD**, start your vehicle. If the overheat warning continues, there's one more thing you can try. You can add the proper coolant mix directly to the radiator, but be sure the cooling system is cool before you do it.

#### CAUTION



Steam and scalding liquids from a hot cooling system can blow out and burn you badly. They are under pressure, and if you turn the radiator pressure cap—even a little—they can come out at high speed. Never turn the cap when the cooling system, including the radiator pressure cap, is hot. Wait for the cooling system and radiator pressure cap to cool if you ever have to turn the cap.



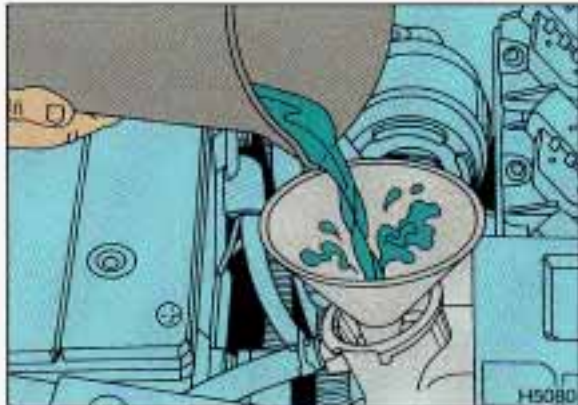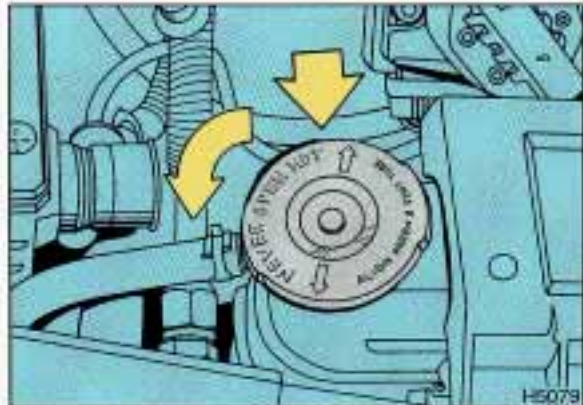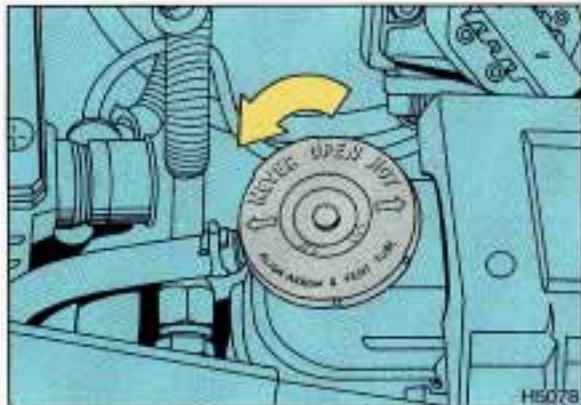

### How to Add Coolant to the Radiator:


1. You can remove the radiator pressure cap when the cooling system, including the radiator pressure cap and upper radiator hose, is no longer hot. Turn the pressure cap slowly to the left until it first stops. (Don't press down while turning the pressure cap.)

If you hear a hiss, wait for that to stop. A hiss means there is still some pressure left.

2. Then keep turning the pressure cap, but now push down as you turn it. Remove the pressure cap.


3. Fill the radiator with the proper mix, up to the base of the filler neck.

## Problems on the Road

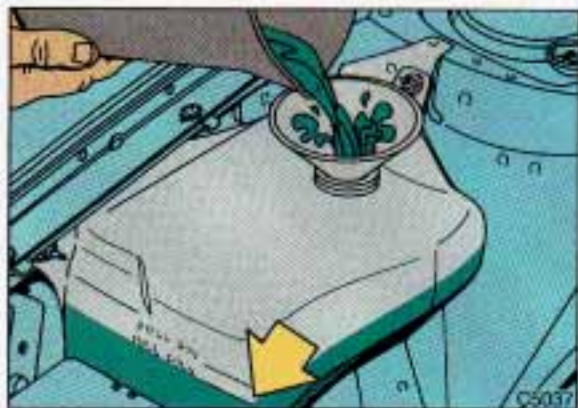


### **Engine Overheating (CONT.)**

4. Then fill the coolant recovery tank to the **FULL COLD** mark.

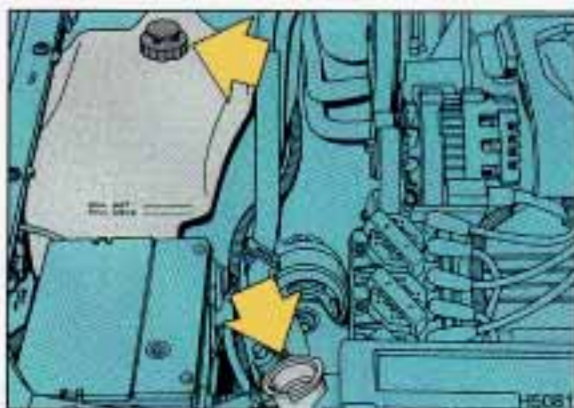


5. Put the cap back on the coolant recovery tank, but leave the radiator pressure cap off.

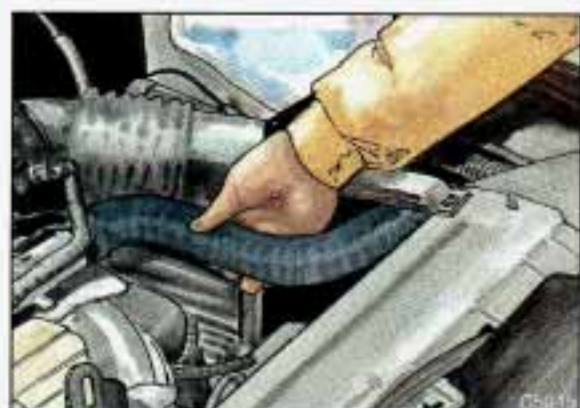

6. Start the engine and let it run until you can feel the upper radiator hose getting hot. Watch out for the engine fan.
7. By this time, the coolant level inside the radiator filler neck may be lower. If the level is lower, add more of the proper mix through the filler neck until the level reaches the base of the filler neck.



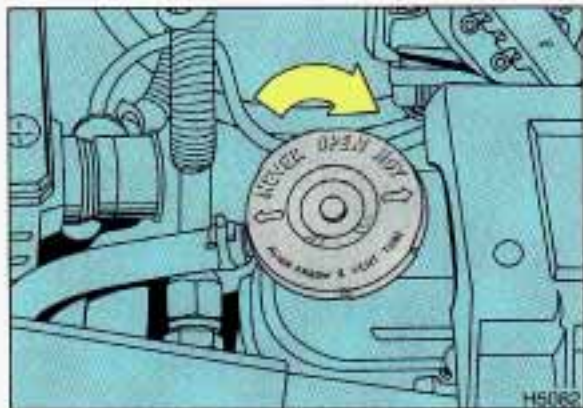

8. Then replace the pressure cap. Be sure the arrows on the pressure cap line up like this.

### ■ *If a Tire Goes Flat*

It's unusual for a tire to "blow out" while you're driving, especially if you maintain your tires properly. If air goes out of a tire, it's much more likely to leak out slowly. But if you should ever have a "blowout," here are a few tips about what to expect and what to do:

If a front tire fails, the flat tire will create a drag that pulls the vehicle toward that side. Take your foot off the accelerator pedal and grip the steering wheel firmly. Steer to maintain lane position, then gently brake to a stop well out of the traffic lane.

A rear blowout, particularly on a curve, acts much like a skid and may require the same correction you'd use in a skid.

In any rear blowout, remove your foot from the accelerator pedal. Get the vehicle under control by steering the way you want the vehicle to go. It may be very bumpy and noisy, but you can still steer. Gently brake to a stop, well off the road if possible.

If your tire goes flat, the next section shows how to use your jacking equipment to change a flat tire safely.

### *Changing a Flat Tire*

If a tire goes flat, avoid further tire and wheel damage by driving slowly to a level place. Turn on your hazard warning flashers.



## Problems on the Road



### Changing a Flat Tire (CONT.)

#### **CAUTION**



Changing a tire can cause an injury. The vehicle can slip off the jack and roll over you or other people. You and they could be badly injured. Find a level place to change your tire. To help prevent the vehicle from moving:

1. Set the parking brake firmly.
2. Put the shift lever in **P** (Park).
3. Turn off the engine.

To be even more certain the vehicle won't move, you can put chocks at the front and rear of the tire farthest away from the one being changed. That would be the tire on the other side of the vehicle, at the opposite end.

The following steps will tell you how to use the jack and change a tire.

The equipment you'll need is in the trunk.



1. Turn the center retainer bolt on the spare tire cover counterclockwise to remove it, then lift the tire cover.
2. Remove the spare tire from the trunk.





3. Open the jack storage cover by twisting the knob  $\frac{1}{4}$  turn counterclockwise.



4. Remove the jack and wheel wrench.

## Problems on the Road

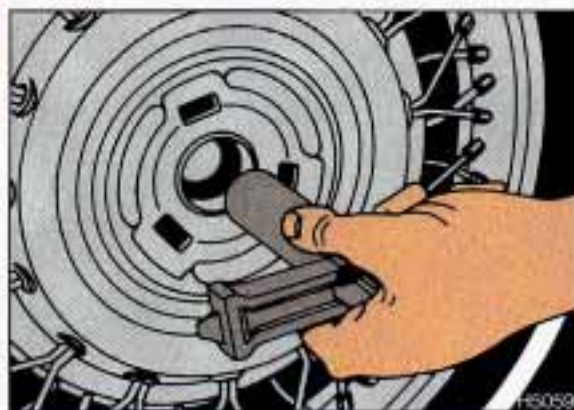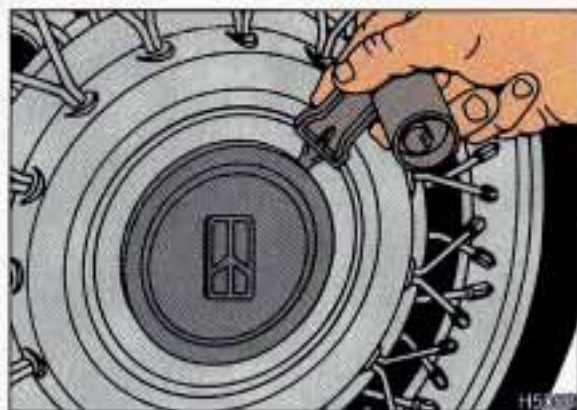

### **Changing a Flat Tire (CONT.)**

5. The following (a-c) are necessary only if you have wire wheel covers:


- a) Remove the special key wrench that's attached to the trunk sidewall.
- b) Using the handle of the special key wrench, pry off the center emblem to reveal the theft-deterrent wheel nut.

c) Push the end of the special key wrench onto the theft-deterrent wheel nut and twist it counter-clockwise to remove the nut.

6. Remove the wheel cover. Non-wire stainless finish full wheel covers are removed by using the end of the wheel wrench handle to pry around the edge of the wheel cover until it comes loose.

If you have wire wheel covers, do not pry the cover off. Remove the cover by hand.



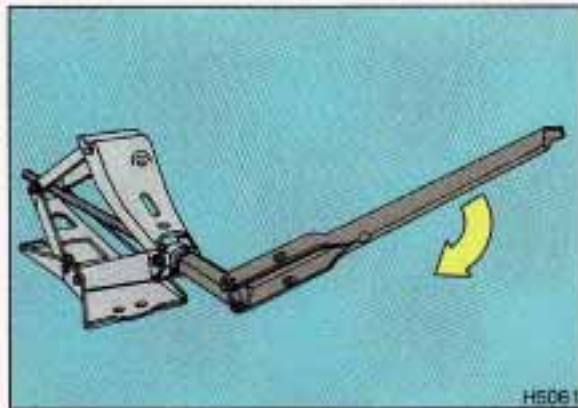


**7.** The following is necessary if you have an alloy (aluminum) wheel with a center cover that conceals the wheel nuts.

- a) Insert the flat end of the wheel wrench in the notch and pry off the center cover. Do not drop the cover or lay it face down, as it could be scratched or damaged.
- b) When replacing the cover after the wheel is put back on the vehicle, do not use a hammer or mallet to install the cover.

**8.** Use the wheel wrench to loosen the wheel nuts, but don't remove them. (The bracket shown is on wheels with wire wheel covers only. It's needed to anchor wire wheel covers to the wheel. Do not misplace it while using your temporary spare tire.)


**9.** Attach the wheel wrench to the jack, and rotate the wrench clockwise to raise the jack head a few inches.

## Problems on the Road

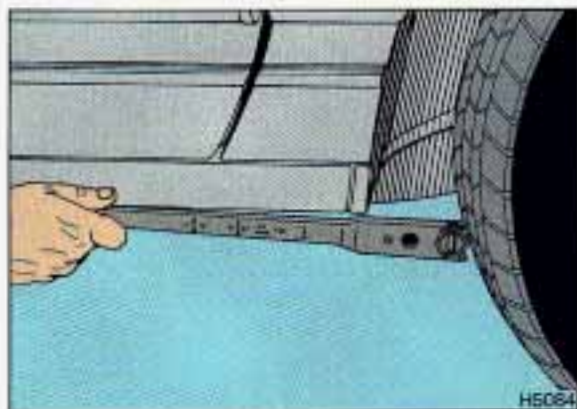


### Changing a Flat Tire (CONT.)


**10.** Near each wheel well is a notch in the frame into which to put the jack head. The front notch is 10 inches back from the front wheel well. The rear notch is 8 inches forward from the rear wheel well. The wheel wrench has these 8 and 10 inch distances stamped on the handle. Use the wheel wrench to measure to the notch by flipping the socket into the handle, then measure from the socket end of the wrench.

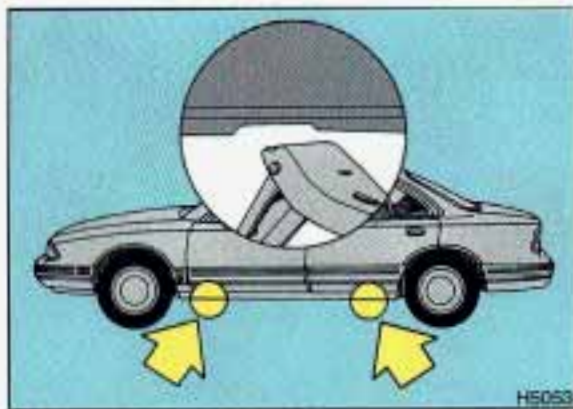

**11.** Position the jack and raise the jack head until it fits firmly into the notch in the vehicle's frame nearest the flat tire. Do not raise the vehicle yet. Put the compact spare tire near you.

### CAUTION

 Getting under a vehicle when it is jacked up is dangerous. If the vehicle slips off the jack, you could be badly injured or killed. Never get under a vehicle when it is supported only by a jack.

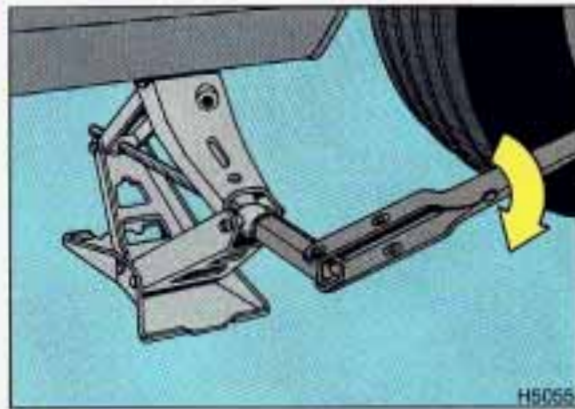


**12.** Raise the vehicle by rotating the wheel wrench clockwise in the jack. Raise the jack far enough so there's enough room for the spare tire to fit.

### NOTICE

Raising your vehicle with the jack improperly positioned will damage the vehicle or may allow the vehicle to fall off the jack. Be sure to fit the jack lift head into the proper location before raising your vehicle.

**13.** Remove all the wheel nuts and take off the flat tire.



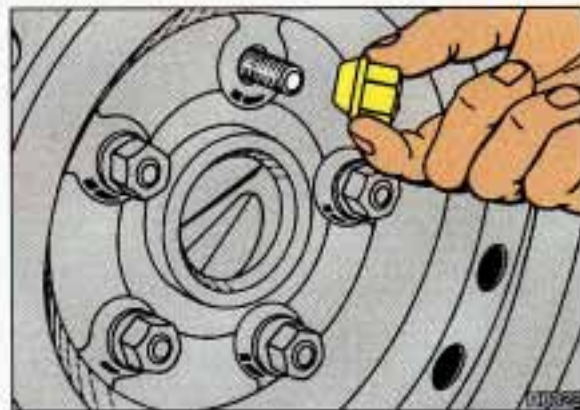


## CAUTION

 Rust or dirt on the wheel, or on the parts to which it is fastened, can make the wheel nuts become loose after a time. The wheel could come off and cause an accident. When you change a wheel, remove any rust or dirt from the places where the wheel attaches to the vehicle. In an emergency, you can use a cloth or a paper towel to do this; but be sure to use a scraper or wire brush later, if you need to, to get all the rust or dirt off.

14. Remove any corrosion from the wheel bolts, mounting surface or spare wheel.
15. Place the spare tire on the mounting surface.



## CAUTION

 Never use oil or grease on studs or nuts. If you do, the nuts might come loose. Your wheel could fall off, causing a serious accident.

16. Replace the wheel nuts with the rounded end of the nuts toward the wheel. Tighten each nut by hand until the wheel is held against the hub.



## Problems on the Road

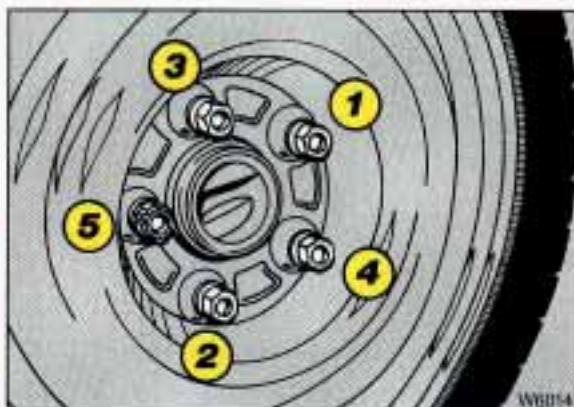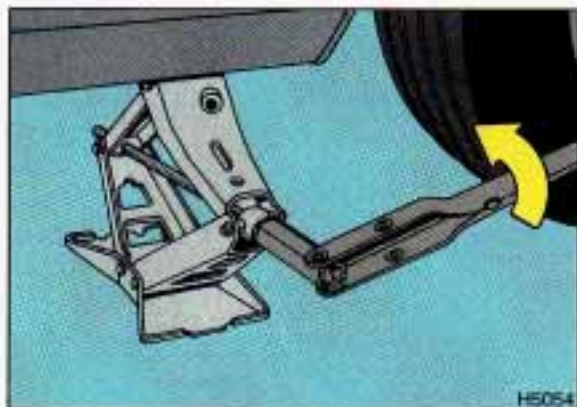


### Changing a Flat Tire (CONT.)

17. Lower the vehicle by rotating the wheel wrench counterclockwise on the jack. Lower the jack completely.

18. In a crisscross sequence, tighten the wheel nuts firmly.

### CAUTION

 Incorrect wheel nuts or improperly tightened wheel nuts can cause the wheel to become loose and even come off. This could lead to an accident. Be sure to use the correct wheel nuts. If you have to replace them, be sure to get the right kind.

Stop somewhere as soon as you can and have the nuts tightened with a torque wrench to 100 pound-feet (140 N•m).

Don't try to put the wheel cover on the compact spare tire. It won't fit. Store the wheel cover in the trunk until you have replaced the compact spare tire with a regular tire.


### NOTICE

Wheel covers won't fit on your compact spare. If you try to put a wheel cover on your compact spare, you could damage the cover or the spare.



19. Store the flat tire as far forward in the trunk as possible. Store the jack and wheel wrench in their compartment in the trunk.

### CAUTION

 Storing a jack, a tire, or other equipment in the passenger compartment of the vehicle could cause injury. In a sudden stop or collision, loose equipment could strike someone. Store all these in the proper place.

The compact spare is for temporary use only. Replace the compact spare tire with a full-size tire as soon as you can. See *Compact Spare Tire* later in this section.

### Compact Spare Tire

Although the compact spare was fully inflated when your vehicle was new, it can lose air after a time. Check the inflation pressure regularly. It should be 60 psi (420 kPa). The compact spare is made to go up to 3,000 miles (5 000 km), so you can finish your trip and have your full-size tire repaired or replaced where you want. Of course, it's best to replace your spare with a full-size tire as soon as you can. Your spare will last longer and be in good shape in case you need it again.

Your anti-lock brake system warning light may come on when you are driving with a compact spare. See the *Index* under *Anti-Lock Brake System Warning Light*.

### NOTICE

Don't take your compact spare through an automatic car wash with guide rails. The compact spare can get caught on the rails. That can damage the tire and wheel, and maybe other parts of your vehicle.

Don't use your compact spare on some other vehicle.

And don't mix your compact spare or wheel with other wheels or tires. They won't fit. Keep your spare and its wheel together.

### NOTICE

Tire chains won't fit your compact spare. Using them will damage your vehicle and destroy the chains too. Don't use tire chains on your compact spare.



## *Problems on the Road*

### ***If You're Stuck: In Sand, Mud, Ice or Snow***

What you **don't** want to do when your vehicle is stuck is to spin your wheels. The method known as "rocking" can help you get out when you're stuck, but you must use caution.

#### **CAUTION**



If you let your tires spin at high speed, they can explode and you or others could be injured. And, the transaxle or other parts of the vehicle can overheat. That could cause an engine compartment fire or other damage. When you're stuck, spin the wheels as little as possible. Don't spin the wheels above 35 mph (56 km/h) as shown on the speedometer.

#### **NOTICE**

Spinning your wheels can destroy parts of your vehicle as well as the tires. If you spin the wheels too fast while shifting your transaxle back and forth, you can destroy your transaxle.



### **Rocking Your Vehicle to Get it Out:**

First, turn your steering wheel left and right. That will clear the area around your front wheels. Then shift back and forth between **R** (Reverse) and a forward gear, spinning the wheels as little as possible. Release the accelerator pedal while you shift, and press lightly on the accelerator pedal when the transaxle is in gear. If that doesn't get you out after a few tries, you may need to be towed out. If you do need to be towed out, see the *Index* under *Towing Your Oldsmobile*.

## *Notes*



Here you will find information about the care of your Oldsmobile. This part begins with service and fuel information, and then it shows how to check important fluid and lubricant levels. There is also technical information about your vehicle, and a section devoted to its appearance care.

## Part 6

# Service & Appearance Care

Service .....	222
Fuel .....	223
Hood Release .....	226
Engine Oil .....	229
Air Cleaner .....	232
Transaxle Fluid .....	234
Engine Coolant .....	236
Power Steering Fluid .....	240
Windshield Washer Fluid .....	240
Brakes .....	241
Battery .....	243
Bulb Replacement .....	244
Windshield Wiper Blade Replacement .....	245
Loading Your Vehicle .....	246
Tires .....	247
Appearance Care .....	254
Vehicle Identification Number (VIN) .....	262
Add-On Electrical Equipment .....	263
Fuses & Circuit Breakers .....	264
Capacities & Specifications .....	268
Normal Maintenance Replacement Parts .....	269
Fluids & Lubricants .....	270
Replacement Bulbs .....	272



## Service & Appearance Care



### Service

Your Oldsmobile dealer knows your vehicle best and wants you to be happy with it. We hope you'll go to your dealer for all your service needs. You'll get genuine GM parts and GM-trained and supported service people.

We hope you'll want to keep your GM vehicle all GM. Genuine GM parts have one of these marks.

### Doing Your Own Service Work

If you want to do some of your own service work, you'll want to get the proper Oldsmobile Service Manual. It tells you much more about how to service your Oldsmobile than this manual can. To order the proper service manual, see the *Index* under *Service Publications*.

You should keep a record with all parts receipts and list the mileage and the date of any service work you've performed. See the *Index* under *Maintenance Record*.

### CAUTION



You can be injured if you try to do service work on a vehicle without knowing enough about it.

- Be sure you have sufficient knowledge, experience, and the proper replacement parts and tools before you attempt any vehicle maintenance task.
- Be sure to use the proper nuts, bolts, and other fasteners. "English" and "metric" fasteners can be easily confused. If you use the wrong fasteners, parts can later break or fall off. You could be hurt.

### NOTICE

If you try to do service work without knowing enough about it, your vehicle could be damaged.



## Fuel

Use regular unleaded gasoline rated at 87 octane or higher. It should meet specifications ASTM D4814 in the U.S. and CGSB 3.5-92 in Canada. These fuels should have the proper additives, so you should not have to add anything to the fuel.

In the U.S. and Canada, it's easy to be sure you get the right kind of gasoline (unleaded). You'll see "UNLEADED" right on the pump. And only unleaded nozzles will fit into your vehicle's filler neck.

Be sure the posted octane is at least 87. If the octane is less than 87, you may get a heavy knocking noise when you drive.

If it's bad enough, it can damage your engine.

If you're using fuel rated at 87 octane or higher and you still hear heavy knocking, your engine needs service. But don't worry if you hear a little pinging noise when you're accelerating or driving up a hill. That's normal, and you don't have to buy a higher octane fuel to get rid of pinging. It's the heavy, constant knock that means you have a problem.

**Fuel Capacity:** 18 U.S. Gallons (68L). Use unleaded fuel only.

**What about gasoline with blending materials that contain oxygen, such as MTBE or alcohol?**

- **MTBE** is "methyl tertiary-butyl ether." Fuel that is no more than 15% MTBE is fine for your vehicle.

- **Ethanol** is ethyl or grain alcohol. Properly-blended fuel that is no more than 10% ethanol is fine for your vehicle.
- **Methanol** is methyl or wood alcohol.

## NOTICE

Fuel that is more than 5% methanol is bad for your vehicle. Don't use it. It can corrode metal parts in your fuel system and also damage plastic and rubber parts. That damage wouldn't be covered under your warranty. And even at 5% or less, there must be "cosolvents" and corrosion preventers in this fuel to help avoid these problems.



# Service & Appearance Care

## ***Gasolines for Cleaner Air***

Your use of gasoline with detergent additives will help prevent deposits from forming in your engine and fuel system. That helps keep your engine in tune and your emission control system working properly. It's good for your vehicle, and you'll be doing your part for cleaner air.

Many gasolines are now blended with materials called oxygenates. General Motors recommends that you use gasolines with these blending materials, such as MTBE and ethanol. By doing so, you can help clean the air, especially in those parts of the country that have high carbon monoxide levels.

In addition, some gasoline suppliers are now producing reformulated gasolines. These gasolines are specially designed to reduce vehicle emissions. General Motors recommends that you use reformulated gasoline. By doing so, you can help clean the air, especially in those parts of the country that have high ozone levels.

You should ask your service station operators if their gasolines contain detergents and oxygenates, and if they have been reformulated to reduce vehicle emissions.



## ***Fuels in Foreign Countries***

If you plan on driving in another country outside the U.S. or Canada, unleaded fuel may be hard to find.

Do not use leaded gasoline. If you use even one tankful, your emission controls won't work well or at all. With continuous use, spark plugs can get fouled, the exhaust system can corrode, and your engine oil can deteriorate quickly. Your vehicle's oxygen sensor will be damaged. All of that means costly repairs that wouldn't be covered by your warranty.



To check on fuel availability, ask an auto club, or contact a major oil company that does business in the country where you'll be driving.

You can also write us at the following address for advice. Just tell us where you're going and give your Vehicle Identification Number (VIN).


General Motors of Canada Ltd.  
International Export Sales  
P.O. Box 828  
Oshawa, Ontario L1H 7N1, Canada



### ***Filling Your Tank***

The cap is behind a hinged door on the left side of your vehicle.

#### **CAUTION**


 Gasoline vapor is highly flammable. It burns violently, and that can cause very bad injuries. Don't smoke if you're near gasoline or refueling your vehicle. Keep sparks, flames, and smoking materials away from gasoline.

To take off the cap, turn it slowly to the left (counterclockwise).



While refueling, hang the cap inside the fuel door. Twist it clockwise to secure it, if necessary.

#### **CAUTION**

 If you get gasoline on you and then something ignites it, you could be badly burned. Gasoline can spray out on you if you open the fuel filler cap too quickly. This spray can happen if your tank is nearly full, and is more likely in hot weather. Open the fuel filler cap slowly and wait for any "hiss" noise to stop. Then unscrew the cap all the way.

When you put the cap back on, turn it to the right until you hear a clicking noise.

# Service & Appearance Care

## Filling Your Tank (CONT.)

### NOTICE

If you need a new cap, be **sure** to get the right type. Your dealer can get one for you. If you get the wrong type, it may not fit or have proper venting, and your fuel tank and emissions system might be damaged.

## ■ Checking Things Under the Hood

The following sections tell you how to check fluids, lubricants and important parts underhood.




## Hood Release

To open the hood, first pull the hood release handle inside the vehicle.



Then go to the front of the vehicle and pull up on the underhood release. Lift the hood.

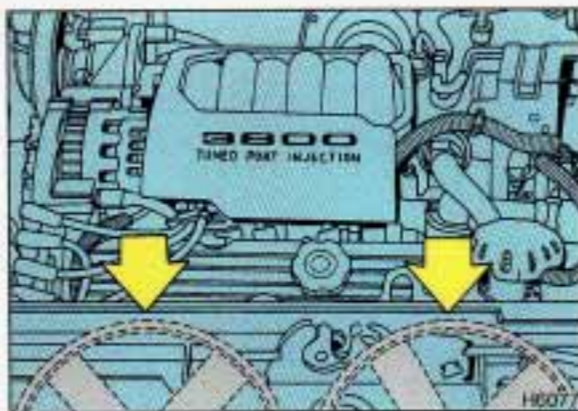

### **CAUTION**



An electric fan under the hood can start up and injure you even when the engine is not running. Keep hands, clothing and tools away from any underhood electric fan.

### **CAUTION**



Things that burn can get on hot engine parts and start a fire. These include liquids like gasoline, oil, coolant, brake fluid, windshield washer and other fluids, and plastic or rubber. You or others could be burned. Be careful not to drop or spill things that will burn onto a hot engine.


Before closing the hood, be sure all the filler caps are on properly. Then just pull the hood down and close it firmly.

### ***Underhood Light***

Your parking lights or headlights must be on for the underhood light to function when you open the hood.





## Service & Appearance Care

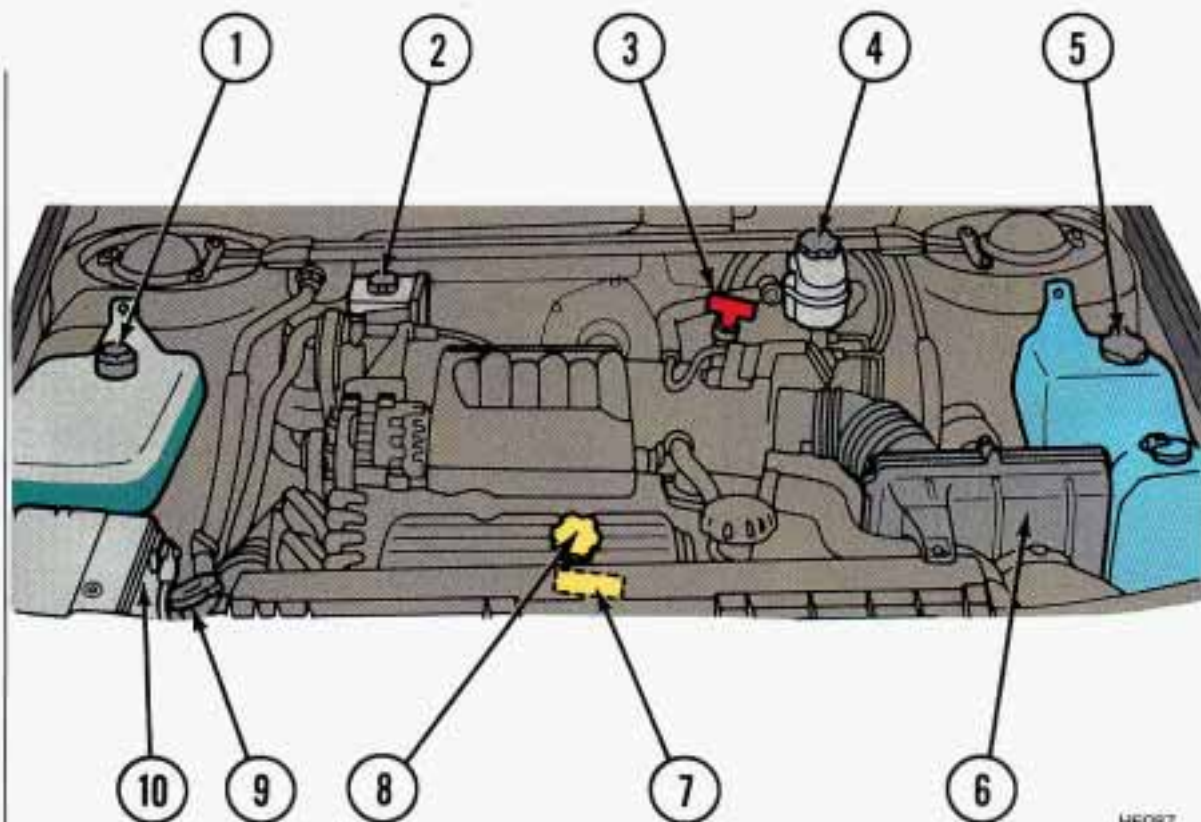

### **3800 Engine (Code L)**

When you open the hood, you'll see:

1. Engine Coolant Recovery Tank
2. Power Steering Fluid Reservoir
3. Automatic Transaxle Fluid Dipstick
4. Brake Fluid Reservoir
5. Windshield Washer Fluid Reservoir
6. Air Cleaner
7. Engine Oil Dipstick
8. Engine Oil Fill Cap
9. Radiator Pressure Cap
10. Battery

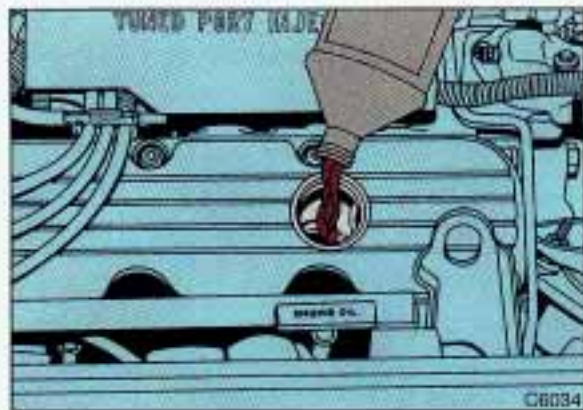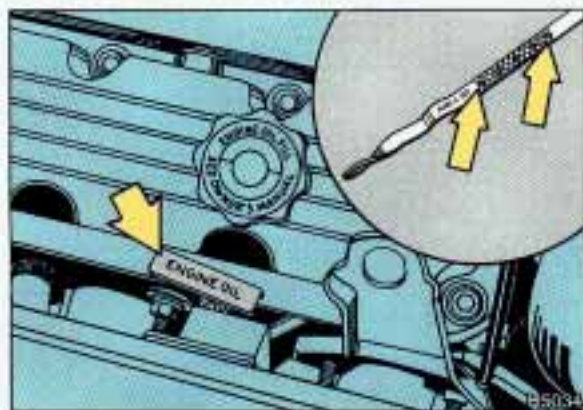

## Engine Oil

It's a good idea to check your engine oil every time you get fuel. In order to get an accurate reading, the oil must be warm and the vehicle must be on level ground. Turn off the engine and give the oil a few minutes to drain back into the oil pan. If you don't, the oil dipstick might not show the actual level.

### To Check Engine Oil:

Pull out the dipstick and clean it with a paper towel or cloth, then push it back in all the way. Remove it again, keeping the tip lower.

### When to Add Oil:

If the oil is at or below the **ADD** line, then you'll need to add some oil. But you must use the right kind. This section explains what kind of oil to use. For crankcase capacity, see the *Index* under *Capacities & Specifications*.

## NOTICE

Don't add too much oil. If your engine has so much oil that the oil level gets above the cross-hatched area that shows the proper operating range, your engine could be damaged.

Just fill it enough to put the level somewhere in the proper operating range. Push the dipstick all the way back in when you're through.



# Service & Appearance Care



## What Kind of Oil to Use

Look for Three Things:

- **SG**

"SG" must be on the oil container, either by itself or combined with other quality designations, such as "SG/CC," "SG/CD," "SF, SG, CC," etc. These letters show American Petroleum Institute (API) levels of quality.

### NOTICE

If you use oils that don't have the "SG" designation, you can cause engine damage not covered by your warranty.

## Recommended SAE Viscosity Grade Engine Oils

For best fuel economy and cold starting, select the lowest SAE viscosity grade oil for the expected temperature range.

**HOT WEATHER**



**COLD WEATHER**

IF NEITHER SAE 5W-30 NOR SAE 10W-30 GRADE OILS ARE AVAILABLE, SAE 30 GRADE MAY BE USED AT TEMPERATURES ABOVE 40 DEGREES F (4 DEGREES C).

DO NOT USE SAE 10W-40, SAE 20W-50 OR ANY OTHER GRADE OIL NOT RECOMMENDED.

X61D1

- **SAE 10W-30**

As shown in the viscosity chart, SAE 10W-30 is best for your vehicle. However, you can use SAE 5W-30 if it's going to be colder than 60°F (16°C) before your next oil change. When it's very cold, below 0°F (-18°C), you should use SAE 5W-30. These numbers on an oil container show its viscosity, or thickness. Do not use other viscosity oils such as SAE 10W-40 or SAE 20W-50.

- **Energy Conserving II**

Oils with these words on the container will help you save fuel.

This doughnut-shaped logo (symbol) is used on most oil containers to help you select the correct oil.

You should look for this on the oil container, and use **only** those oils that display the logo.

GM Goodwrench® Oil (in Canada, GM Engine Oil) meets all the requirements for your vehicle.



### **Engine Oil Additives**

Don't add anything to your oil. Your Oldsmobile dealer is ready to advise if you think something should be added.

### **When to Change Engine Oil**

See if any one of these is true for you:

- Most trips are less than 4 miles (6 km).
- It's below freezing outside and most trips are less than 10 miles (16 km).
- The engine is at low speed most of the time (as in door-to-door delivery, or in stop-and-go traffic).
- You tow a trailer often.
- Most trips are through dusty places.

If any one of these is true for your vehicle, you need to change your **oil and filter** every 3,000 miles (5 000 km) or 3 months—whichever comes first. If the **CHANGE OIL NOW** message appears in the optional information center, you should change your oil.

If none of them is true, change the oil every 7,500 miles (12 500 km) or 12 months—whichever comes first. Change the filter at the first oil change and at every other oil change after that. If your vehicle is equipped with the Driver Information Center, always reset the engine oil life to 100% after every oil change.


### **Engine Block Heater**

An engine block heater can be a big help if you have to park outside in very cold weather, 0°F (-18°C) or colder. If your vehicle has this option, see the *Index* under *Engine Block Heater*.

## Service & Appearance Care

### What to Do with Used Oil

#### CAUTION


 Used engine oil contains things that have caused skin cancer in laboratory animals. Don't let used oil stay on your skin for very long. Clean your skin and nails with soap and water, or a good hand cleaner. Wash or properly throw away clothing or rags containing used engine oil.

Used oil can be a real threat to the environment. If you change your own oil, be sure to drain all free-flowing oil from the filter before disposal. Don't ever dispose of oil by pouring it on the ground, into sewers, or into streams or bodies of water. Instead, recycle it by taking it to a place that collects used oil. If you have a problem properly disposing of your used oil, ask your dealer, a service station or a local recycling center for help.

### Air Cleaner



Refer to the Maintenance Schedule to determine when to replace the air filter. See the *Index* under *Scheduled Maintenance Services*.

#### CAUTION

 Operating the engine with the air cleaner off can cause you or others to be burned. The air cleaner not only cleans the air, it stops flame if the engine backfires. If it isn't there, and the engine backfires, you could be burned. Don't drive with it off, and be careful working on the engine with the air cleaner off.

## NOTICE

If the air cleaner is off, a backfire can cause a damaging engine fire. And, dirt can easily get into your engine, which will damage it. Always have the air cleaner in place when you're driving.

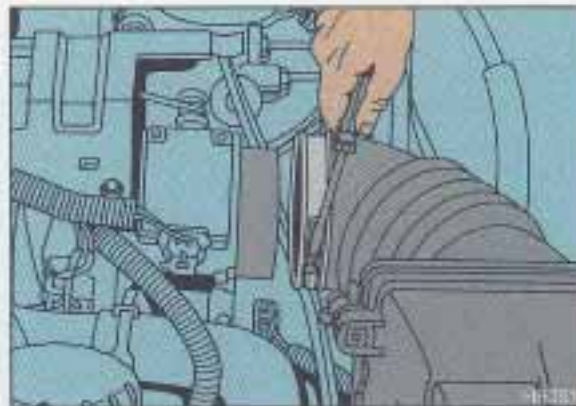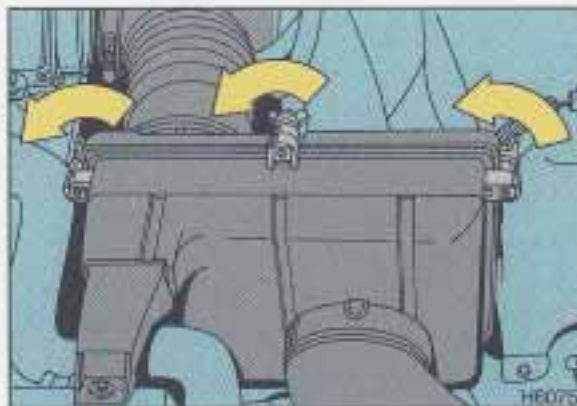


### To Check or Replace it:

1. Unscrew the three wingscrews in the housing cover and pull back.
2. Unscrew the clamp on the air intake hose where the hose attaches to the throttle body near the top of the engine. Detach the hose from the throttle body, then pull back the rear of the housing cover.



## Service & Appearance Care

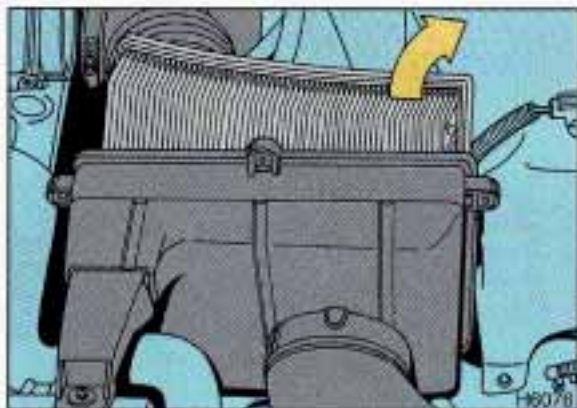

### **Air Cleaner (CONT.)**

3. Remove the air filter.
4. Be sure to install the air filter and replace the cover tightly.
5. Reattach the air intake hose and tighten the clamp.

### **Automatic Transaxle Fluid**

#### **When to Check and Change:**

A good time to check your automatic transaxle fluid level is when the engine oil is changed. Refer to the Maintenance Schedule to determine when to change your fluid. See the *Index* under *Scheduled Maintenance Services*.

#### **How to Check:**

Because this operation can be a little difficult, you may choose to have this done at an Oldsmobile dealership Service Department. If you do it yourself, be sure to follow all the instructions here, or you could get a false reading on the dipstick.

### **NOTICE**



Too much or too little fluid can damage your transaxle. Too much can mean that some of the fluid could come out and fall on hot engine parts, starting a fire. Be sure to get an accurate reading if you check your transaxle fluid.

Wait at least 30 minutes before checking the transaxle fluid level if you have been driving:

- When outside temperatures are above 90°F (32°C).
- At high speed for quite awhile.
- In heavy traffic—especially in hot weather.
- While pulling a trailer.

To get the right reading, the fluid should be at normal operating temperature, which is 180°F to 200°F (80°C to 93°C).

Get the vehicle warmed up by driving about 15 miles (24 km) when outside temperatures are above 50°F (10°C). If it's colder than 50°F (10°C), you may have to drive longer.

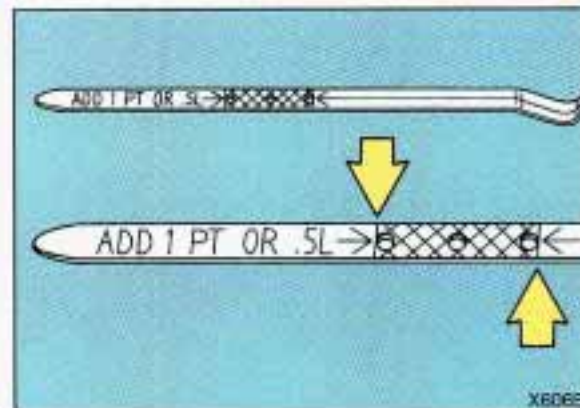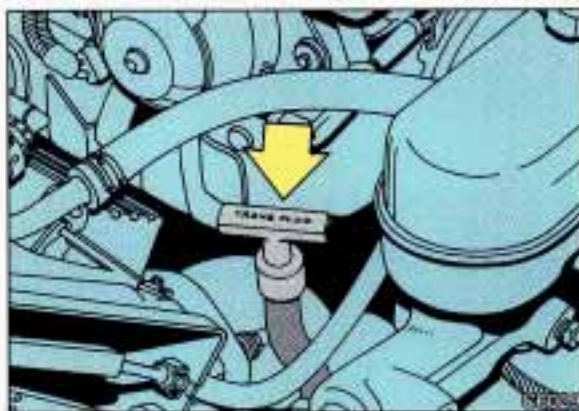

#### To Check the Fluid Level:

- Park your vehicle on a level place.
- Place the shift lever in **P** (Park) with the parking brake applied.
- With your foot on the brake pedal, move the shift lever through each gear range, pausing for about three seconds in each range. Then, position the shift lever in **P** (Park).
- Let the engine run at idle for three to five minutes.


#### Then, Without Shutting Off the Engine, Follow These Steps:

1. Pull out the dipstick and wipe it with a clean rag or paper towel.
2. Push it back in all the way, wait three seconds and then pull it back out again.

3. Check both sides of the dipstick, and read the lower level. The fluid level must be in the cross-hatched area.
4. If the fluid level is where it should be, push the dipstick back in all the way.



## Service & Appearance Care

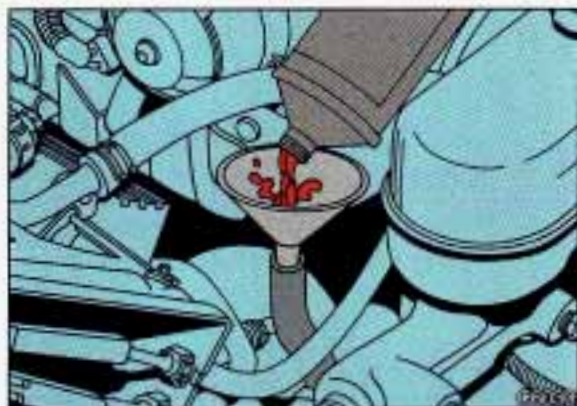

### **Automatic Transaxle Fluid (CONT.)**

#### **How to Add Fluid:**

Refer to the Maintenance Schedule to determine what kind of transaxle fluid to use. See the *Index* under *Fluids & Lubricants*.

If the fluid level is low, add only enough of the proper fluid to bring the level into the cross-hatched area on the dipstick. It doesn't take much fluid, generally less than a pint (0.5 L). Don't overfill. We recommend that you use only fluid labeled DEXRON<sup>®</sup>-III, because fluids with that label are made especially for your automatic transaxle. Damage caused by fluid other than DEXRON<sup>®</sup>-III is not covered by your new vehicle warranty.

After adding fluid, recheck the fluid level as described under *How to Check*. When the correct fluid level is obtained, push the dipstick back in all the way.

### **Engine Coolant**

The following explains your cooling system and how to add coolant when it is low. If you have a problem with engine overheating, see the *Index* under *Engine Overheating*.

The proper coolant for your Oldsmobile will:

- Give freezing protection down to -34°F (-37°C).
- Give boiling protection up to 262°F (128°C).
- Protect against rust and corrosion.
- Help keep the proper engine temperature.
- Let the warning lights work as they should.



#### What to Use:

Use a mixture of one-half **clean water** (preferably distilled) and one-half antifreeze that meets “GM Specification 1825M,” which won’t damage aluminum parts. You can also use a recycled coolant conforming to GM Specification 1825M with a complete coolant flush and refill. Also use GM Engine Coolant Supplement (sealer) with any complete coolant change. If you use these, you don’t need to add anything else.

#### CAUTION




Adding only plain water to your cooling system can be dangerous. Plain water, or some other liquid like alcohol, can boil before the proper coolant mix will. Your vehicle’s coolant warning system is set for the proper coolant mix. With plain water or the wrong mix, your engine could get too hot but you wouldn’t get the overheat warning. Your engine could catch fire and you or others could be burned. Use a 50/50 mix of clean water and a proper antifreeze.

#### NOTICE

If you use an improper coolant mix, your engine could overheat and be badly damaged. The repair cost wouldn’t be covered by your warranty. Too much water in the mix can freeze and crack the engine, radiator, heater core and other parts.

## Service & Appearance Care

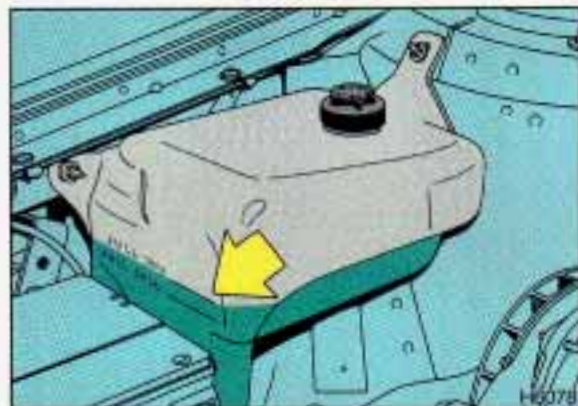

### Adding Coolant

#### To Check Coolant:

When your engine is cold, the coolant level should be between the **FULL COLD** mark and **FULL HOT**. When your engine is warm, the level should be up to **FULL HOT**, or a little higher.

If you have the Electronic Cluster or LSS Cluster and your coolant level is low, the information center display will show:

**COOLANT LEVEL LOW**

**To Add Coolant:** If you need more coolant, add the proper mix **at the coolant recovery tank**.

### CAUTION



Turning the radiator pressure cap when the engine and radiator are hot can allow steam and scalding liquids to blow out and burn you badly. With the coolant recovery tank, you will almost never have to add coolant at the radiator. Never turn the radiator pressure cap—even a little—when the engine and radiator are hot.

Add coolant mix at the recovery tank, but be careful not to spill it.

### **CAUTION**



You can be burned if you spill coolant on hot engine parts. Coolant contains ethylene glycol, and it will burn if the engine parts are hot enough. Don't spill coolant on a hot engine.

### **Radiator Pressure Cap**

#### **NOTICE**

Your radiator cap is a 15 psi (105 kPa) pressure-type cap and must be tightly installed to prevent coolant loss and possible engine damage from overheating. Be sure the arrows on the cap line up with the overflow tube on the radiator filler neck.

When you replace your radiator pressure cap, an AC® cap is recommended.


### **Thermostat**

Engine coolant temperature is controlled by a thermostat in the engine coolant system. The thermostat stops the flow of coolant through the radiator until the coolant reaches a preset temperature.

When you replace your thermostat, an AC® thermostat is recommended.



## Service & Appearance Care

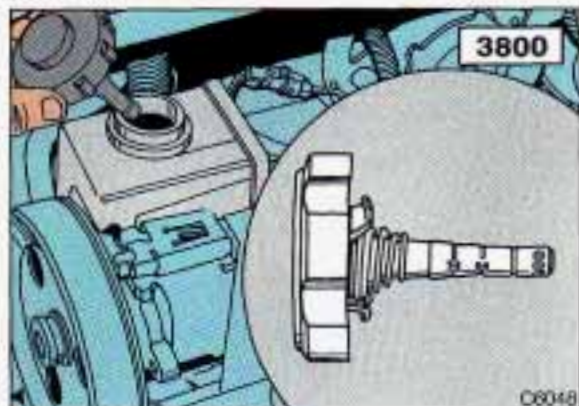

### Power Steering Fluid

#### How To Check Power Steering Fluid:

Unscrew the cap and wipe the dipstick with a clean rag. Replace the cap and completely tighten it. Then remove the cap again and look at the fluid level on the dipstick.


- When the engine compartment is hot, the level should be at the **H** mark.
- When the engine compartment is cool, the level should be at the **C** mark.

#### What to Add:

Refer to the Maintenance Schedule to determine what kind of fluid to use. See the *Index* under *Fluids & Lubricants*.

### NOTICE

When adding power steering fluid or making a complete fluid change, always use the proper fluid. Failure to use the proper fluid can cause leaks and damage hoses and seals.

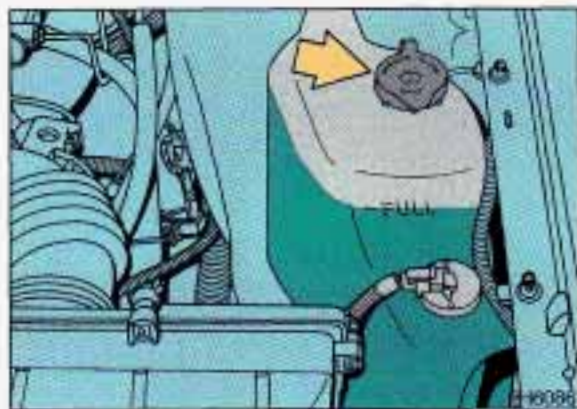

### Windshield Washer Fluid

#### To Add:

Open the cap labeled **WASHER FLUID ONLY**. Add washer fluid until the bottle is full.

## NOTICE

- When using concentrated washer fluid, follow the manufacturer's instructions for adding water.
- Don't mix water with ready-to-use washer fluid. Water can cause the solution to freeze and damage your washer fluid tank and other parts of the washer system. Also, water doesn't clean as well as washer fluid.
- Fill your washer fluid tank only  $\frac{3}{4}$  full when it's very cold. This allows for expansion, which could damage the tank if it is completely full.
- Don't use radiator antifreeze for your windshield washer. It can damage your washer system and paint.



### ***Brake Master Cylinder***

Your brake master cylinder is here. It is filled with DOT-3 brake fluid.

There are only two reasons why the brake fluid level in your master cylinder might go down. The first is that the brake fluid goes down to an acceptable level during normal brake lining wear. When new linings are put in, the fluid level goes back up.

The other reason is that fluid is leaking out of the brake system. If it is, you should have your brake system fixed, since a leak means that sooner or later your brakes won't work well, or won't work at all.

So, it isn't a good idea to "top off" your brake fluid. Adding brake fluid won't correct a leak. If you add fluid when your linings are worn, then you'll have too much fluid when you get new brake linings. You should add (or remove) brake fluid, as necessary, only when work is done on the brake hydraulic system.



# Service & Appearance Care

## Brake Master Cylinder (CONT.)

### CAUTION



If you have too much brake fluid, it can spill on the engine. The fluid will burn if the engine is hot enough. You or others could be burned, and your engine could be damaged. Add brake fluid only when work is done on the brake hydraulic system.

When your brake fluid falls to a low level, your brake warning light will come on. A continuous chime will sound if you try to drive with this warning light on. See the *Index* under *Brake System Warning Light*.

#### What to Add:

When you do need brake fluid, use only DOT-3 brake fluid—such as Delco Supreme II® (GM Part No. 1052535). Use new brake fluid from a sealed container only.


### NOTICE

- DOT-5 silicone brake fluid can damage your vehicle. Don't use it.
- Don't let someone put in the wrong kind of fluid. For example, just a few drops of mineral-based oil, such as engine oil, in your brake system can damage brake system parts so badly that they'll have to be replaced.
- Brake fluid can damage paint, so be careful not to spill brake fluid on your vehicle.

## Replacing Brake System Parts

The braking system on a modern vehicle is complex. Its many parts have to be of top quality and work well together if the vehicle is to have really good braking. Vehicles we design and test have top-quality GM brake parts in them, as your Oldsmobile does when it is new. When you replace parts of your braking system—for example, when your brake linings wear down and you have to have new ones put in—be sure you get new genuine GM replacement parts. If you don't, your brakes may no longer work properly. For example, if someone puts in brake linings that are wrong for your vehicle, the balance between your front and rear brakes can change, for the worse. The braking performance you've come to expect can change in many other ways if someone puts in the wrong replacement brake parts.



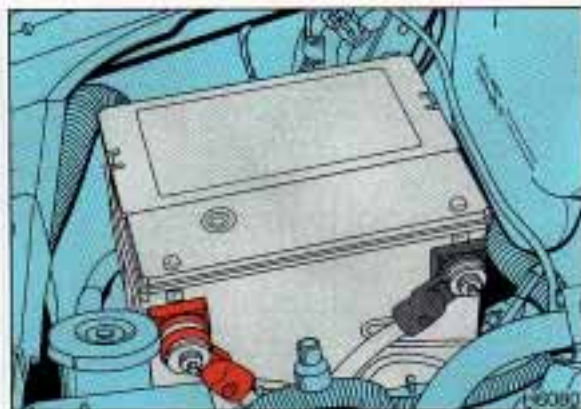

## **Battery**

Every new Oldsmobile has a Delco Freedom® battery. You never have to add water to one of these. When it's time for a new battery, we recommend a Delco Freedom® battery. Get one that has the catalog number shown on the original battery's label.

## **Jump Starting**

For jump starting instructions, see the *Index* under *Jump Starting*.

## **Vehicle Storage**

If you're not going to drive your vehicle for 25 days or more, take off the black negative (–) cable from the battery. This will help keep your battery from running down.

### **CAUTION**




Batteries have acid that can burn you and gas that can explode. You can be badly hurt if you aren't careful. See the *Index* under *Jump Starting* for tips on working around a battery without getting hurt.


Contact your dealer to learn how to prepare your vehicle for longer storage periods.

# Service & Appearance Care

## Halogen Bulbs

### CAUTION


 Halogen bulbs have pressurized gas inside and can burst if you drop or scratch the bulb. You or others could be injured. Take special care when handling and disposing of halogen bulbs.

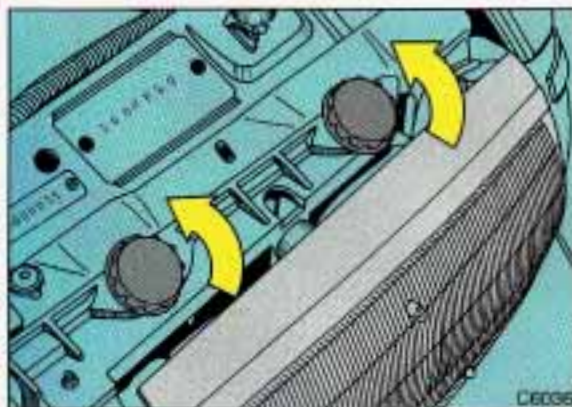

## Headlight Bulb Replacement


For the type of bulb, see the *Index* under *Replacement Bulbs*.

1. Remove the two screws from the top of the headlight housing.
2. Lift the entire headlight housing and tilt it forward.

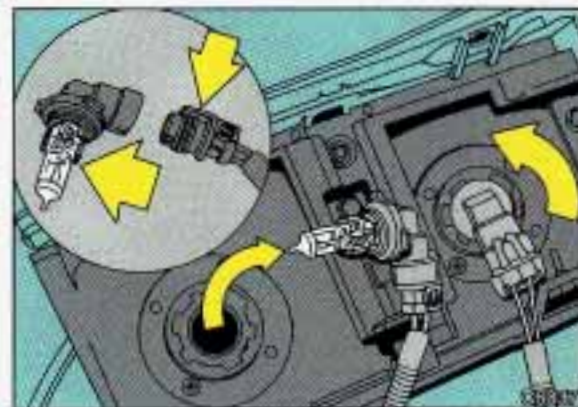

3. Twist the bulb assembly  $\frac{1}{8}$  turn and pull out the bulb assembly.
4. Unclip the bulb assembly from the wiring harness and replace the bulb assembly.
5. Reverse steps 1-3 to replace the bulb assembly and headlight housing.




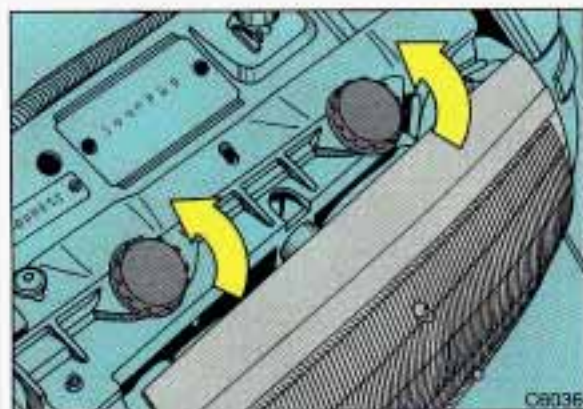


### **Taillight Bulb Replacement**

For the type of bulb, see the *Index* under *Replacement Bulbs*.

1. In the trunk, remove the plastic screw holding the carpeting in place.
2. Pull the carpet away from the rear corner of the trunk.

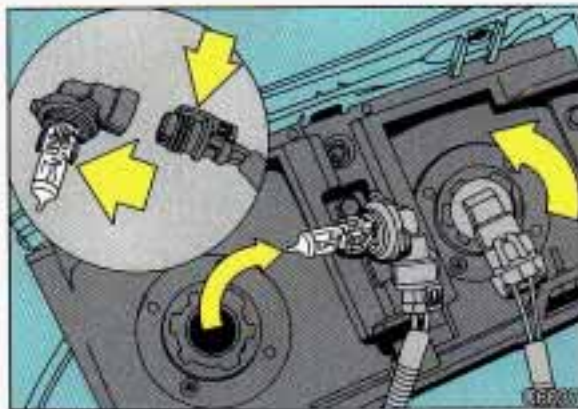

3. Rotate the bulb housing  $\frac{1}{8}$  turn and remove it.
4. To remove bulb, push in and rotate it counterclockwise.
5. Replace the bulb.
6. Reverse the steps to reassemble the taillight.

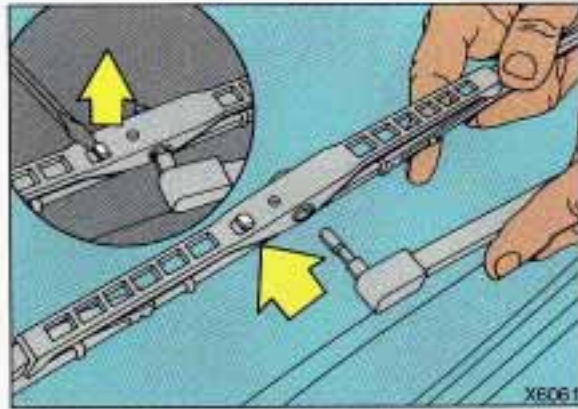

### **Windshield Wiper Blade Replacement**

Replacement blades come in different types and are removed in different ways. Here's how to remove the type with a release clip:

1. Pull the windshield wiper arm away from the windshield.
2. Lift the release clip with a screwdriver and pull the blade assembly off the wiper arm.
3. Push the new wiper blade securely on the wiper arm.



# Service & Appearance Care



## Loading Your Vehicle

Two labels on your vehicle show how much weight it may properly carry. The Tire-Loading Information label found on the rear edge of the driver's door tells you the proper size, speed rating and recommended inflation pressures for the tires on your vehicle. It also gives you important information about the number of people that can be in your vehicle and the total weight that you can carry. This weight is called the Vehicle Capacity Weight and includes the weight of all occupants, cargo, and all nonfactory-installed options.

The other label is the Certification label, also on the rear edge of the driver's door. It tells you the gross weight capacity of your vehicle, called

the GVWR (Gross Vehicle Weight Rating). The GVWR includes the weight of the vehicle, all occupants, fuel and cargo. Never exceed the GVWR for your vehicle, or the Gross Axle Weight Rating (GAWR) for either the front or rear axle.

And, if you do have a heavy load, you should spread it out. Don't carry more than 176 lbs. (80 kg) in your trunk.

On vehicles equipped with electronic level control, the rear of the vehicle is automatically kept level as you load or unload your vehicle.

## CAUTION



Do not load your vehicle any heavier than the GVWR or the maximum front and rear GAWRs. If you do, parts on your vehicle can break, or it can change the way your vehicle handles. These could cause you to lose control. Also, overloading can shorten the life of your vehicle.

## NOTICE

Your warranty does not cover parts or components that fail because of overloading.

If you put things inside your vehicle—like suitcases, tools, packages, or anything else—they will go as fast as the vehicle goes. If you have to stop or turn quickly, or if there is a crash, they'll keep going.

## CAUTION



Things you put inside your vehicle can strike and injure people in a sudden stop or turn, or in a crash.

- Put things in the trunk of your vehicle. In a trunk, put them as far forward as you can. Try to spread the weight evenly.
- Never stack heavier things, like suitcases, inside the vehicle so that some of them are above the tops of the seats.
- When you carry something inside the vehicle, secure it whenever you can.
- Don't leave a seat folded down unless you need to.

## ■ Tires

We don't make tires. Your new vehicle comes with high quality tires made by a leading tire manufacturer. These tires are warranted by the tire manufacturers and their warranties are delivered with every new Oldsmobile. If your spare tire is a different brand than your road tires, you will have a tire warranty folder from each of these manufacturers.

## CAUTION



Poorly maintained and improperly used tires are dangerous.

- Overloading your tires can cause overheating as a result of too much friction. You could have an air-out and a serious accident. See the *Index* under *Loading Your Vehicle*.
- Underinflated tires pose the same danger as overloaded tires. The resulting accident could cause serious injury. Check all tires frequently to maintain the recommended pressure. Tire pressure should be checked when the tires are cold.
- Overinflated tires are more likely to be cut, punctured, or broken by sudden impact, such as when you hit a pothole. Keep tires at the recommended pressure.
- Worn, old tires can cause accidents. If your tread is badly worn, or if your tires have been damaged, replace them.



# Service & Appearance Care

## ***Inflation—Tire Pressure***

The Tire-Loading Information label which is on the rear edge of the driver's door shows the correct inflation pressures for your tires, when they're cold. "Cold" means your vehicle has been sitting for at least three hours or driven no more than a mile.

### **NOTICE**

Don't let anyone tell you that underinflation or overinflation is all right. It's not. If your tires don't have enough air (underinflation), you can get:

- Too much flexing
- Too much heat
- Tire overloading
- Bad wear
- Bad handling
- Bad fuel economy.

If your tires have too much air (overinflation), you can get:

- Unusual wear
- Bad handling
- Rough ride
- Needless damage from road hazards.

### **When to Check:**


Check your tires once a month or more. Don't forget your compact spare tire. It should be at 60 psi (420 kPa).

### **How to Check:**

Use a good quality pocket-type gage to check tire pressure. Simply looking at the tires will not tell you the pressure, especially if you have radial tires—which may look properly inflated even if they're underinflated.

If your tires have valve caps, be sure to put them back on. They help prevent leaks by keeping out dirt and moisture.



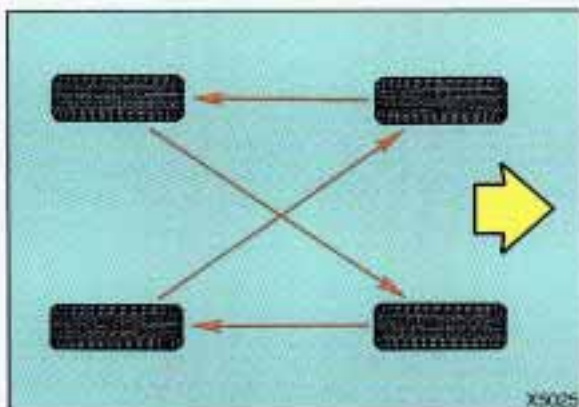

### ***Tire Inspection and Rotation***

To make your tires last longer, have them inspected and rotated at the mileages recommended in your Maintenance Schedule. See the *Index* under *Scheduled Maintenance Services*.


Use this rotation pattern.

After the tires have been rotated, adjust the front and rear inflation pressure as shown on the Tire-Loading Information label. Make certain that all wheel nuts are properly tightened. See the *Index* under *Wheel Nut Torque*.

### **CAUTION**



Rust or dirt on a wheel, or on the parts to which it is fastened, can make the wheel nuts become loose after a time. The wheel could come off and cause an accident. When you change a wheel, remove any rust or dirt from places where the wheel attaches to the vehicle. In an emergency, you can use a cloth or a paper towel to do this; but be sure to use a scraper or wire brush later, if you need to, to get all the rust or dirt off. See the *Index* under *Changing a Flat Tire*.

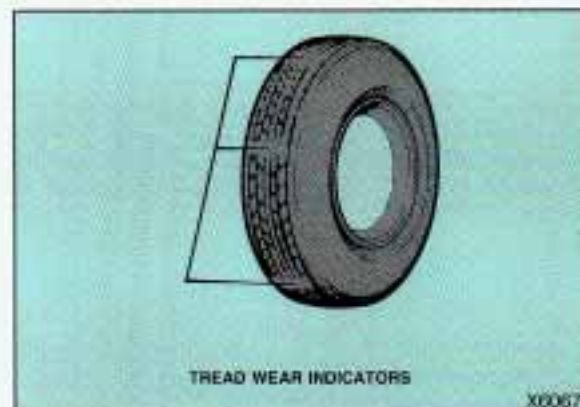

### ***When It's Time for New Tires***

One way to tell when it's time for new tires is to check the treadwear indicators, which will appear when your tires have only 2/32 inch (1.6 mm) or less of tread remaining.

You need a new tire if:

- You can see the indicators at three places around the tire.
- You can see cord or fabric showing through the tire's rubber.
- The tread or sidewall is cracked, cut or snagged deep enough to show cord or fabric.
- The tire has a bump, bulge or split.
- The tire has a puncture, cut, or other damage that can't be repaired well because of the size or location of the damage.

## Service & Appearance Care

### **Buying New Tires**

To find out what kind and size of tires you need, look at the Tire-Loading Information label. The tires installed on your vehicle when it was new had a Tire Performance Criteria Specification (TPC Spec) number on each tire's sidewall. When you get new tires, get ones with that same TPC Spec number. That way, your vehicle will continue to have tires that are designed to give proper endurance, handling, speed rating, traction, ride and other things during normal service on your vehicle.

If your tires have an all-season tread design, the TPC number will be followed by a "MS" (for mud and snow).

If you ever replace your tires with those not having a TPC Spec number, make

sure they are the same size, load range, speed rating and construction type (bias, bias-belted or radial) as your original tires.

### **CAUTION**



Mixing tires could cause you to lose control while driving.

If you mix tires of different sizes or types (radial and bias-belted tires), the vehicle may not handle properly, and you could have a crash. Be sure to use the same size and type tires on all four wheels. It's all right to drive with your compact spare, though. It was developed for use on your vehicle.

### ■ **Uniform Tire Quality Grading**

The following information relates to the system developed by the United States National Highway Traffic Safety Administration which grades tires by treadwear, traction and temperature performance. (This applies only to vehicles sold in the United States.)

#### **Treadwear**

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course. For example, a tire graded 150 would wear one and a half (1½) times as well on the government course as a tire graded 100. The relative performance of tires depends upon the actual conditions



of their use, however, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

### ***Traction—A, B, C***

The traction grades, from highest to lowest are: A, B, and C. They represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete. A tire marked C may have poor traction performance.

**Warning:** The traction grade assigned to this tire is based on braking (straight-ahead) traction tests and does not include cornering (turning) traction.

### ***Temperature—A, B, C***

The temperature grades are A (the highest), B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel. Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure. The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109. Grades B and A represent higher levels of performance on the laboratory test wheel than the minimum required by law.

**Warning:** The temperature grade for this tire is established for a tire that is properly inflated and not overloaded. Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.

Those grades are molded on the sidewalls of passenger car tires.

While the tires available as standard or optional equipment on General Motors vehicles may vary with respect to these grades, all such tires meet General Motors performance standards and have been approved for use on General Motors vehicles. All passenger type (P Metric) tires must conform to Federal safety requirements in addition to these grades.



## Service & Appearance Care

### Wheel Alignment and Tire Balance

The wheels on your vehicle were aligned and balanced carefully at the factory to give you the longest tire life and best overall performance.

In most cases, you will not need to have your wheels aligned again. However, if you notice unusual tire wear or your vehicle pulling one way or the other, the alignment may need to be reset. If you notice your vehicle vibrating when driving on a smooth road, your wheels may need to be rebalanced.

### Wheel Replacement

Replace any wheel that is bent, cracked or badly rusted. If wheel nuts keep coming loose, the wheel, wheel bolts, and wheel nuts should be replaced. If the wheel leaks air out, replace it (except some aluminum wheels, which can sometimes be repaired). See your Oldsmobile dealer if any of these conditions exist.

Your dealer will know what kind of wheel you need.

Each new wheel should have the same load carrying capacity, diameter, width, offset, and be mounted the same way as the one it replaces.

If you need to replace any of your wheels, wheel bolts, or wheel nuts, replace them only with **new GM** original equipment parts. This way, you will be sure you have the right wheel, wheel bolts, and wheel nuts for your Oldsmobile.

### CAUTION



Using the wrong replacement wheels, wheel bolts, or wheel nuts on your vehicle can be dangerous. It could affect the braking and handling of your vehicle, make your tires lose air and make you lose control. You could have a collision in which you or others could be injured. Always use the correct wheel, wheel bolts, and wheel nuts for replacement.

## **NOTICE**

The wrong wheel can also cause problems with bearing life, brake cooling, speedometer/odometer calibration, headlight aim, bumper height, vehicle ground clearance, and tire or tire chain clearance to the body and chassis.

## **Used Replacement Wheels**

### **CAUTION**



Putting a used wheel on your vehicle is dangerous. You can't know how it's been used or how many miles it's been driven. It could fail suddenly and cause an accident. If you have to replace a wheel, use a **new** GM original equipment wheel.

## **Tire Chains**

### **NOTICE**


Use tire chains only when you must. Use only SAE Class "S" type chains that are the proper size for your tires. Install them on the front tires and tighten them as tightly as possible with the ends securely fastened. Drive slowly and follow the chain manufacturer's instructions. If you can hear the chains contacting your vehicle, stop and retighten them. If the contact continues, slow down until it stops. Driving too fast with chains on will damage your vehicle.

## Service & Appearance Care



### ■ Appearance Care

#### **CAUTION**

 Cleaning products can be hazardous. Some are toxic. Others can burst into flame if you strike a match or get them on a hot part of the vehicle. Some are dangerous if you breathe their fumes in a closed space. When you use anything in a container to clean your Oldsmobile, be sure to follow the instructions. And always open your doors or windows when you're cleaning the inside.

Never use these to clean your vehicle:

- |            |                        |                       |
|------------|------------------------|-----------------------|
| ● Gasoline | ● Carbon Tetrachloride | ● Turpentine          |
| ● Benzene  | ● Acetone              | ● Lacquer Thinner     |
| ● Naphtha  | ● Paint Thinner        | ● Nail Polish Remover |

They can all be hazardous—some more than others—and they can all damage your vehicle, too.

#### **NOTICE**

Don't use any of these unless this manual says you can. In many uses, they will damage your vehicle:

- Laundry Soap
- Bleach
- Reducing Agents



## ***Cleaning the Inside of Your Oldsmobile***

Use a vacuum cleaner often to get rid of dust and loose dirt. Wipe vinyl with a clean, damp cloth.

Your Oldsmobile dealer has two GM cleaners—a solvent-type spot lifter and a foam-type powdered cleaner. They will clean normal spots and stains very well.

Here are some cleaning tips:

- Always read the instructions on the cleaner label.
- Clean up stains as soon as you can—before they set.
- Use a clean cloth or sponge, and change to a clean area often. A soft brush may be used if stains are stubborn.

- Use solvent-type cleaners in a well-ventilated area only. If you use them, don't saturate the stained area.
- If a ring forms after spot cleaning, clean the entire area immediately or it will set.

## ***Using Foam-Type Cleaner on Fabric***

- Vacuum and brush the area to remove any loose dirt.
- Always clean a whole trim panel or section. Mask surrounding trim along stitch or welt lines.
- Mix Multi-Purpose Powdered Cleaner following the directions on the container label.
- Use suds only and apply with a clean sponge.

- Don't saturate the material.
- Don't rub it roughly.
- As soon as you've cleaned the section, use a sponge to remove the suds.
- Rinse the section with a clean, wet sponge.
- Wipe off what's left with a slightly damp paper towel or cloth.
- Then dry it immediately with an air hose, a hair dryer or a heat lamp.

### ***NOTICE***

Be careful with a hair dryer or heat lamp. You could scorch the fabric.

- Wipe with a clean cloth.

## *Service & Appearance Care*

### ***Using Solvent-Type Cleaner on Fabric***

First, see if you have to use solvent-type cleaner at all. Some spots and stains will clean off better with just water and mild soap.

If you need to use it, then:

- Gently scrape excess soil from the trim material with a clean, dull knife or scraper. Use very little cleaner, light pressure and clean cloths (preferably cheesecloth). Cleaning should start at the outside of the stain, "feathering" toward the center. Keep changing to a clean section of the cloth.
- When you clean a stain from fabric, immediately dry the area with an air hose, hair dryer, or heat lamp to help prevent a cleaning ring. (See the previous NOTICE.)

### ***Special Cleaning Problems***

#### **Greasy or Oily Stains:**

Like grease, oil, butter, margarine, shoe polish, coffee with cream, chewing gum, cosmetic creams, vegetable oils, wax crayons, tar and asphalt.

- Carefully scrape off excess stain.
- Then follow the solvent-type instructions above.
- Shoe polish, wax crayons, tar and asphalt will stain if left on a vehicle seat fabric. They should be removed as soon as possible. Be careful, because the cleaner will dissolve them and may cause them to bleed.

#### **Non-Greasy Stains:**

Like catsup, coffee (black), egg, fruit, fruit juice, milk, soft drinks, wine, vomit, urine and blood.

- Carefully scrape off excess stain, then sponge the soiled area with cool water.
- If a stain remains, follow the foam-type instructions above.
- If an odor lingers after cleaning vomit or urine, treat the area with a water/baking soda solution: 1 teaspoon (5 ml) of baking soda to 1 cup (250 ml) of lukewarm water.
- Finally, if needed, clean lightly with solvent-type cleaner.

### **Combination Stains:**

Like candy, ice cream, mayonnaise, chili sauce and unknown stains.

- Carefully scrape off excess stain, then clean with cool water and allow to dry.
- If a stain remains, clean it with solvent-type cleaner.

### ***Cleaning Vinyl or Leather***

Just use warm water and a clean cloth.

- Rub with a clean, damp cloth to remove dirt. You may have to do it more than once.
- Things like tar, asphalt and shoe polish will stain if you don't get them off quickly. Use a clean cloth and solvent-type vinyl/leather cleaner.

### ***Cleaning the Top of the Instrument Panel***

Use only mild soap and water to clean the top surfaces of the instrument panel. Sprays containing silicones or waxes may cause annoying reflections in the windshield and even make it difficult to see through the windshield under certain conditions.



## Service & Appearance Care


### **Delco-Bose® Speaker Covers**

Vacuum around a Delco-Bose® speaker cover gently, so that the speaker won't be damaged. If something gets on one of them, follow the steps earlier under *Using Solvent-Type Cleaner on Fabric*. Use as little solvent as you can.

### **Care of Safety Belts**

Keep belts clean and dry.

#### **CAUTION**

 Do not bleach or dye safety belts. If you do, it may severely weaken them. In a crash they might not be able to provide adequate protection. Clean safety belts only with mild soap and lukewarm water.

### **Glass**

Glass should be cleaned often. GM Glass Cleaner (GM Part No. 1050427) or a liquid household glass cleaner will remove normal tobacco smoke and dust films.

Don't use abrasive cleaners on glass, because they may cause scratches. Avoid placing decals on the inside rear window, since they may have to be scraped off later.

If abrasive cleaners are used on the inside of the rear window, an electric defogger element may be damaged. Any temporary license should not be attached across the defogger grid.

### ***Cleaning the Outside of the Windshield and Wiper Blades***

If the windshield is not clear after using the windshield washer, or if the wiper blade chatters when running, wax or other material may be on the blade or windshield.

Clean the outside of the windshield with GM Windshield Cleaner, Bon-Ami Powder® (GM Part No. 1050011). The windshield is clean if beads do not form when you rinse it with water.

Clean the blade by wiping vigorously with a cloth soaked in full strength windshield washer solvent. Then rinse the blade with water.

Wiper blades should be checked on a regular basis and replaced when worn.

### ***Cleaning the Outside of Your Oldsmobile***

The paint finish on your vehicle provides beauty, depth of color, gloss retention and durability.

#### **Washing Your Vehicle**

The best way to preserve your vehicle's finish is to keep it clean by washing it often with lukewarm or cold water.

Don't wash your vehicle in the direct rays of the sun. Don't use strong soaps or chemical detergents. Use liquid hand, dish or car washing (non-detergent) soaps. Don't use cleaning agents that contain acid or abrasives. All cleaning

agents should be flushed promptly and not allowed to dry on the surface, or they could stain. Dry the finish with a soft, clean chamois or a 100% cotton towel to avoid surface scratches and water spotting.

High pressure vehicle washes may cause water to enter your vehicle.

# Service & Appearance Care

## **Finish Care**

Occasional waxing or mild polishing of your Oldsmobile may be necessary to remove residue from the paint finish. You can get GM approved cleaning products from your dealer. (See the *Index* under *Appearance Care*.)

Your Oldsmobile has a “basecoat/clearcoat” paint finish. The clearcoat gives more depth and gloss to the colored basecoat.

### **NOTICE**

Machine compounding or aggressive polishing on a basecoat/clearcoat paint finish may dull the finish or leave swirl marks.

## **Aluminum Wheels (IF SO EQUIPPED)**

Your aluminum wheels have a protective coating similar to the painted surface of your Oldsmobile. Don't use strong soaps, chemicals, chrome polish, or other abrasive cleaners on them because you could damage this coating. After rinsing thoroughly, a wax may be applied.

### **NOTICE**

If you have aluminum wheels, don't use an automatic vehicle wash that has hard silicon carbide cleaning brushes. These brushes can take off the protective coating.

## **White Sidewall Tires**

Your Oldsmobile dealer has a GM White Sidewall Tire Cleaner. You can use a stiff brush with it.

## **Weatherstrips**

These are places where glass or metal meets rubber. Silicone grease there will make them last longer, seal better, and not squeak. Apply silicone grease with a clean cloth at least every six months.



### ***Sheet Metal Damage***

If your vehicle is damaged and requires sheet metal repair or replacement, make sure the body repair shop applies anti-corrosion material to the parts repaired or replaced to restore corrosion protection.

### ***Foreign Material***

Calcium chloride and other salts, ice melting agents, road oil and tar, tree sap, bird droppings, chemicals from industrial chimneys, and other foreign matter can damage your vehicle's finish if they remain on painted surfaces. Use cleaners that are marked safe for painted surfaces for these stains.

### ***Finish Damage***

Any stone chips, fractures or deep scratches in the finish should be repaired right away. Bare metal will corrode quickly and may develop into a major repair expense.

Minor chips and scratches can be repaired with touch-up materials available from your dealer or other service outlets. Larger areas of finish damage can be corrected in your dealer's body and paint shop.

# Service & Appearance Care

## **Underbody Maintenance**


Chemicals used for ice and snow removal and dust control can collect on the underbody. If these are not removed, accelerated corrosion (rust) can occur on the underbody parts such as fuel lines, frame, floor pan, and exhaust system even though they have corrosion protection.

At least every spring, flush these materials from the underbody with plain water. Clean any areas where mud and other debris can collect. Dirt packed in closed areas of the frame should be loosened before being flushed. Your dealer or an underbody vehicle washing system can do this for you.

## **Chemical Paint Spotting**

Some weather and atmospheric conditions can create a chemical fallout. Airborne pollutants can fall upon and attack painted surfaces on your vehicle. This damage can take two forms: blotchy, ringlet-shaped discolorations, and small irregular dark spots etched into the paint surface.

Although no defect in the paint job causes this, Oldsmobile will repair, at no charge to the owner, the surfaces of new vehicles damaged by this fallout condition within 12 months or 12,000 miles (20 000 km) of purchase, whichever comes first.

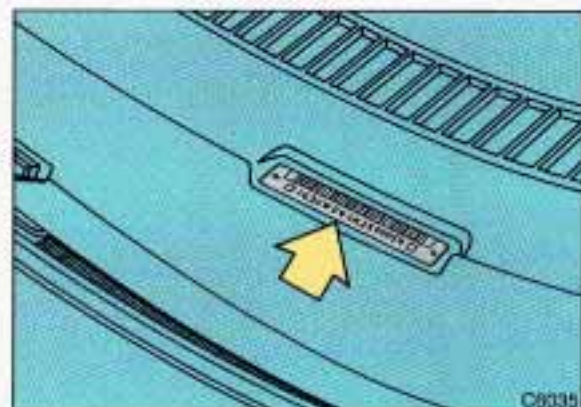

## **Vehicle Identification Number (VIN)**

This is the legal identifier for your Oldsmobile. It appears on a plate in the front corner of the instrument panel, on the driver's side. You can see it if you look through the windshield from outside your vehicle. The VIN also appears on the Vehicle Certification and Service Parts labels and the certificates of title and registration.



### ***Engine Identification***

The eighth character in your VIN is the engine code for your GM engine. This code will help you identify your engine, specifications, and replacement parts in this section.

### ***Service Parts Identification Label***

You'll find this label on your spare tire cover. It's very helpful if you ever need to order parts. On this label is:

- Your VIN.
- Its model designation.
- Paint information.
- A list of all production options and special equipment.

Be sure that this label is not removed from the vehicle.


### ***Add-On Electrical Equipment***

#### ***NOTICE***

Don't add anything electrical to your Oldsmobile unless you check with your dealer first. Some electrical equipment can damage your vehicle and the damage wouldn't be covered by your warranty. Some of it can just keep other things from working as they should.




## Service & Appearance Care

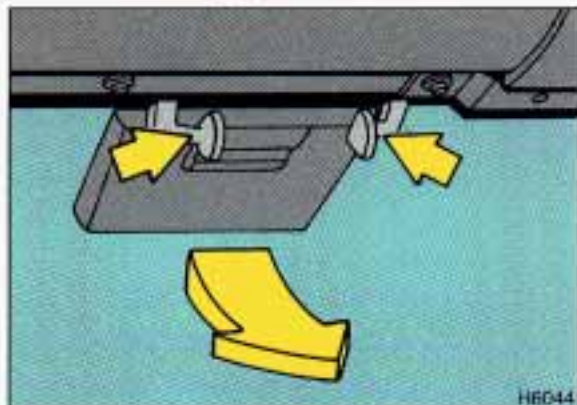

### Fuses & Circuit Breakers


The wiring circuits in your vehicle are protected from short circuits by a combination of fuses and circuit breakers. This greatly reduces the chance of fires caused by electrical problems.

The main fuse panel is located to the left of the steering wheel, under the instrument panel. Pinch the release levers to lower the fuse panel for ease of viewing, then pull the fuse panel toward you to lock it down.

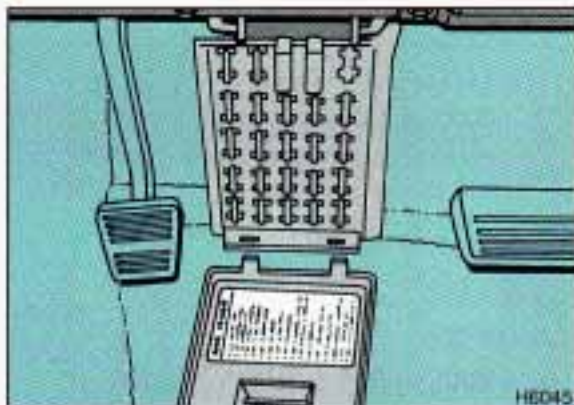


Snap off the cover to reveal the fuses. You'll find a fuse puller clipped to the inside of the cover. Place the wide end of the fuse puller over the plastic end of the fuse. Squeeze the ends over the fuse and pull it out.

Spare fuses are located in the slots labeled "Spare" on the following chart.

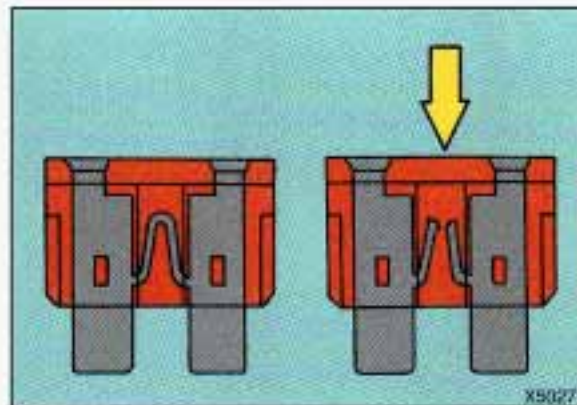

Look at the silver-colored band inside the fuse. If the band is broken or melted, replace the fuse. Be sure you replace a bad fuse with a new one of the correct size.

When finished, replace the cover and pinch the release levers again to unlock the panel. Press it back up into place.

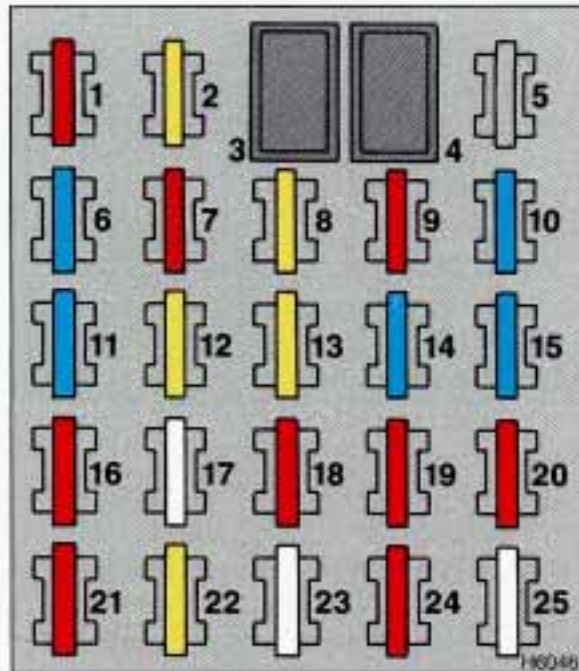


**Left Side Fuse Panel**

### **Fuses & Circuit Breakers**

<b>Position</b>	<b>Rating (AMP.)</b>	<b>Circuitry</b>
1	10	Start-up Signal—Air Bag
2	20	Trunk Release/Back-up Lights/Brake-Shift Interlock (with Retained Accessory Power Option)
3	30	Breaker—Power Window
4	30	Breaker—Power Accessory
5		Not Used
6	15	Ignition/Illuminated Entry/Keyless Entry/Retained Accessory Control/Instrument Cluster
7	10	Supplemental Inflatable Restraint (Air Bag)
8	20	Cornering Lights/Turn Signals/(Back-up Lights/Brake-Shift Interlock without Retained Accessory Power Option)
9	10	Spare
10	15	Spare
11	15	Battery/Radio/Instrument Panel/Oil Level
12	20	Electronic Level Control
13	20	Brake/Hazard Warning Flashers
14	15	Parking Lights
15	15	Courtesy Lights/Power Mirrors
16	10	Cooling Fan/Transaxle
17	25	Air Conditioning
18		Not Used
19	10	Anti-Lock Brake System
20	10	Low Coolant/Light Monitor/Oil Level
21	10	Instrument Panel Lighting
22	20	Spare
23	25	Spare
24	10	Ignition/Radio
25	25	Wiper/Washer




## Service & Appearance Care

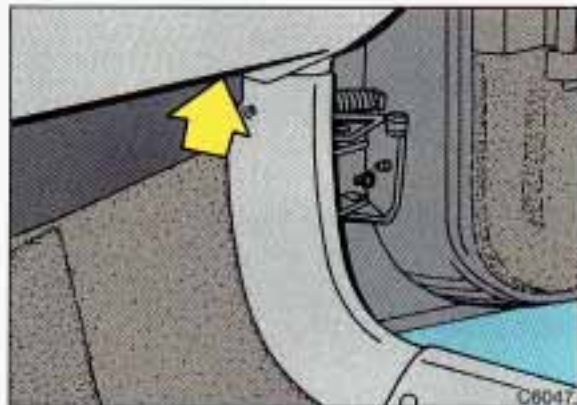

### Right Side Fuse Panel


Additional fuses are located in the relay center, on the far right side, below the instrument panel. You must remove the sound insulator on the right side of the passenger foot well to replace these fuses.

Replacing these fuses is difficult. We recommend that you see your dealer if you need one replaced.

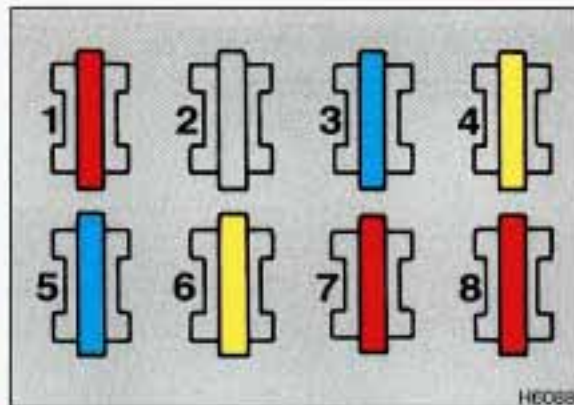

### Fuses

Position	Rating (AMP.)	Circuitry
1	10	A/C Programmer
2		Blank
3	15	Power Antenna/Door Locks, Accessory Power Outlets
4	20	Horns
5	15	Engine Relays and Miscellaneous Engine Content
6	20	Fuel Pump
7	10	Fuel Injectors
8	10	Engine Control Module/PASS-Key II™

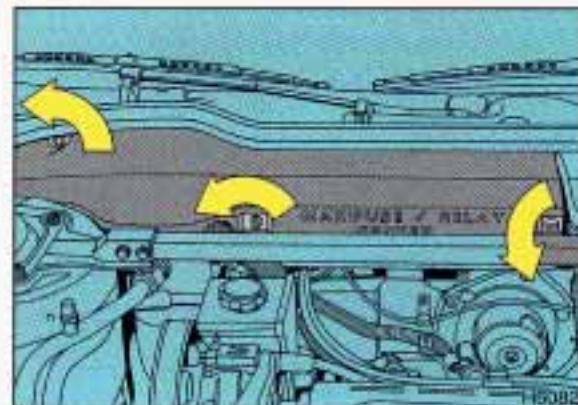

### Maxifuse/Relay Center

To check the fuses in this underhood fuse center, turn the two knobs  $\frac{1}{4}$  turn counterclockwise and loosen the metal wingnut on the passenger side of the cover. Then remove the cover. The inside of the cover has a chart that explains the features and controls governed by each fuse and relay.



### ***Headlight Wiring***

The headlight wiring is protected by a circuit breaker in the light switch. An electrical overload will cause the lights to go on and off, or in some cases to remain off. If this happens, have your headlight system checked right away.

### ***Windshield Wipers***

The windshield wiper motor is protected by a circuit breaker and a fuse. If the motor overheats due to heavy snow, etc., the wiper will stop until the motor cools. If the overload is caused by some electrical problem, have it fixed.

### ***Power Windows and Other Power Options***

Circuit breakers in the fuse panel protect the power windows and other power accessories. When the current load is too heavy, the circuit breaker opens and closes, protecting the circuit until the problem is fixed.

# Service & Appearance Care

## Capacities & Specifications

### Automatic Transaxle AT 440-T4 (Overdrive)

*When draining or replacing torque converter, more fluid may be needed.*

Pan Removal and Replacement .....	6½ quarts	6.00 L
After Complete Overhaul .....	11 quarts	10.50 L
<b>Cooling System</b> .....	13 quarts	12.00 L
<b>Refrigerant, Air Conditioning</b> .....	See refrigerant charge label under hood.	
<i>Not all air conditioning refrigerants are the same. If the air conditioning system in your vehicle needs refrigerant, be sure the proper refrigerant is used. If you're not sure, ask your Oldsmobile dealer.</i>		
<b>Engine Crankcase</b> .....	4 quarts	3.75 L
<i>When changing filter, up to 1 quart (1 liter) more oil may be needed.</i>		
<b>Fuel Tank</b> .....	18 gallons	68.00 L
<b>Power Steering</b>		
Pump Only .....	1 pint	0.50 L
Complete System .....	1½ pints	0.75 L
<b>Tire Pressures, Sizes</b> .....	See Tire-Loading Information label on driver's door.	
<b>Wheel Nut Torque</b> .....	100 pound-feet (140 N·m)	

**NOTE:** All capacities are approximate. When adding, be sure to fill to the appropriate level, as recommended in this manual.

## ***Engine Specifications***

### **3800 Tuned Port Injection Engine**

VIN Engine Code .....	L
Type .....	V6
Displacement .....	3.8 Liters
Compression Ratio .....	8.5:1
Firing Order .....	1-6-5-4-3-2
Thermostat Temperature Specification	195° F (91° C)

### ***Normal Maintenance Replacement Parts***

Air Cleaner Element .....	AC Type A-1096C
Engine Oil Filter .....	AC Type PF-47
PCV Valve .....	AC Type CV-892C
Remote Lock Control Battery (2) .....	2016
Spark Plugs .....	AC Type 41-600 Gap: 0.060 inch (1.52 mm)



# Service & Appearance Care

## Fluids & Lubricants

ITEM	APPLICATION	GM PART NUMBER	SIZE
Antifreeze Coolant . . . . . (Ethylene Glycol Base)	Year-round antifreeze for . . . . . coolant mixtures	1052753	1 gal. (3.8 L)
Chassis Lubricant . . . . . (Grease Gun Insert)	General chassis lube, etc. . . . .	1052497	14 oz. (397 g)
Delco Supreme 11 <sup>®</sup> Brake Fluid . . . . .	Brake System . . . . .	1052535	16 oz. (0.5 L)
DEXRON <sup>®</sup> - IIE Automatic Transmission Fluid . . . . .	Automatic Transaxle . . . . .	12345881 12345006	32 oz. (1.0 L) 1 gal. (3.8 L)
Engine Oil . . . . .	Engine lubrication . . . . .	See <i>Engine Oil</i> in this section.	
GM Engine Oil Supplement . . . . . (E.O.S.)	See your dealer for advice . . . . .	1052367	16 oz. (0.5L)

ITEM	APPLICATION	GM PART NUMBER	SIZE
Engine Oil .....	Hood, trunk and door hinges		
Windshield Washer Solvent .....	Windshield washer fluid		
Power Steering Fluid (Normal) .....	Power Steering System .....	1050017	32 oz. (1.0 L)
		1052884	16 oz. (0.5 L)
Power Steering Fluid (Cold Climate) .. (System must be drained and refilled with it.)	Power Steering System .....	12345867	32 oz. (1.0L)
		12345866	16 oz. (0.5L)
Dielectric Silicone Grease .....	Weatherstrips .....	12345579	1 oz. (28 g)
Spray-A-Squeak Silicone Lubricant ...	General purpose silicone lubricant ....	1052276 (aerosol)	4.5 oz. (127 g)
		1052277	12 oz. (0.35 L)

# Service & Appearance Care

## Replacement Bulbs

### OUTSIDE LIGHTS

### BULB

### Bulb Messages

If you have the Electronic Cluster or LSS Cluster, your information center provides these messages about burned-out bulbs.

Back-up Lights . . . . .	2057 . . . . .	<b>BACK-UP LAMP OUT</b>
Cornering Lights . . . . .	2057	
Front Parking . . . . .	2057NA . . . . .	<b>FRONT PARK LAMP OUT</b>
Front Turn Signal Lights . . . . .	2057NA . . . . .	<b>FRONT TURN LAMP OUT</b>
License Plate Light . . . . .	194 . . . . .	<b>TAIL LAMP OUT</b>
Center High-Mounted Stoplight . . . . .	1156 . . . . .	<b>CENTER STOP LAMP OUT</b>
Rear Sidemarker Lights . . . . .	194 . . . . .	<b>REAR STOP LAMP OUT</b>
Halogen Headlights		
Low Beam . . . . .	9006 . . . . .	<b>LOW BEAM LAMP OUT</b>
High Beam . . . . .	9005 . . . . .	<b>HIGH BEAM LAMP OUT</b>
Stop/Taillights . . . . .	2057 . . . . .	<b>TAIL LAMP OUT</b>
Rear Turn Signal . . . . .	2057 . . . . .	<b>REAR LAMP OUT</b>
Trunk Light . . . . .	93	
Underhood Light . . . . .	561	



**INSIDE LIGHTS****BULB**

Door Courtesy Lights .....	194
Front Headerlights .....	906
Glove Compartment Light .....	194
Turn Signal Indicators .....	74
Visor Vanity Light .....	564
Ashtray .....	161
Hush Panel (Lower Floor Lighting) .....	168
Front Header .....	563
Rear Rail Reading .....	A3173B

## *Notes*

**IMPORTANT**  
KEEP ENGINE OIL  
AT THE PROPER  
LEVEL AND CHANGE AS  
RECOMMENDED

This part covers the maintenance required for your Oldsmobile. Your vehicle needs these services to retain its safety, dependability and emission control performance.



Have you purchased the  
GM Protection Plan?  
The Plan supplements your  
new vehicle warranties.  
See your Oldsmobile dealer for details.

## Part 7

# Maintenance Schedule

### Section

#### Introduction

A Word About Maintenance .....	276
Your Vehicle and the Environment .....	276
How This Part is Organized .....	277
<b>A. Scheduled Maintenance Services</b>	
Using Your Maintenance Schedules .....	278
Selecting the Right Schedule .....	278
Schedule I .....	280
Schedule II .....	282
Explanation of Scheduled Maintenance Services .....	284
<b>B. Owner Checks &amp; Services</b>	
At Each Fuel Fill .....	287
At Least Once a Month .....	287
At Least Once a Year .....	288
<b>C. Periodic Maintenance Inspections</b> .....	290
<b>D. Recommended Fluids &amp; Lubricants</b> .....	291
<b>E. Maintenance Record</b> .....	294



# *Maintenance Schedule*

## *Introduction*

### ***A Word About Maintenance***

We at General Motors want to help you keep your vehicle in good working condition. But we don't know exactly how you'll drive it. You may drive very short distances only a few times a week. Or you may drive long distances all the time in very hot, dusty weather. You may use your vehicle in making deliveries. Or you may drive it to work, to do errands or in many other ways.

Because of all the different ways people use their GM vehicles, maintenance needs vary. You may even need more frequent checks and replacements than you will find in the schedules in this part. So please read this part and note how you drive. If you have any questions on how to keep your vehicle in good condition, see your Oldsmobile dealer, the place many GM owners choose to have their maintenance work done. Your dealer can be relied upon to use proper parts and practices.

### ***Your Vehicle and the Environment***

Proper vehicle maintenance not only helps to keep your vehicle in good working condition, but also helps the environment. All recommended maintenance procedures are important. Improper vehicle maintenance or the removal of important components can significantly affect the quality of the air we breathe. Improper fluid levels or even the wrong tire inflation can increase the level of emissions from your vehicle. To help protect our environment, and to help keep your vehicle in good condition, please maintain your vehicle properly.

## ***How This Part is Organized***

The remainder of this part is divided into five sections:

Section A: Scheduled Maintenance Services shows what to have done and how often. Some of these services can be complex, so unless you are technically qualified and have the necessary equipment, you should let your dealer's service department or another qualified service center do these jobs.

### **CAUTION**



Performing maintenance work on a vehicle can be dangerous. In trying to do some jobs, you can be seriously injured. Do your own maintenance work only if you have the required know-how and the proper tools and equipment for the job. If you have any doubt, have a qualified technician do the work.

If you are skilled enough to do some work on your vehicle, you will probably want to get the service information GM publishes. You will find a list of publications and how to get them in this manual. See the *Index* under *Service Publications*.

Section B: Owner Checks & Services tells you what should be checked whenever you stop for fuel. It also explains what you can easily do to help keep your vehicle in good condition.

Section C: Periodic Maintenance Inspections explains important inspections that your Oldsmobile dealer's service department or another qualified service center should perform.

Section D: Recommended Fluids & Lubricants lists some products GM recommends to help keep your vehicle properly maintained. These products, or their equivalents, should be used whether you do the work yourself or have it done.

Section E: Maintenance Record provides a place for you to record the maintenance performed on your vehicle. Whenever any maintenance is performed, be sure to write it down in this section. This will help you determine when your next maintenance should be done. In addition, it is a good idea to keep your maintenance receipts. They may be needed to qualify your vehicle for warranty repairs.

# Maintenance Schedule

## Section A: Scheduled Maintenance Services

### **Using Your Maintenance Schedules**

This section tells you the maintenance services you should have done and when you should schedule them. Your Oldsmobile dealer knows your vehicle best and wants you to be happy with it. If you go to your dealer for your service needs, you'll know that GM-trained and supported service people will perform the work using genuine GM parts.

These schedules are for vehicles that:

- carry passengers and cargo within recommended limits. You will find these limits on your vehicle's Tire-Loading Information label. See the *Index* under *Loading Your Vehicle*.
- are driven on reasonable road surfaces within legal driving limits.
- use the recommended unleaded fuel. See the *Index* under *Fuel*.

### **Selecting the Right Schedule**

First you'll need to decide which of the two schedules is right for your vehicle. Here's how to decide which schedule to follow:



### ***Schedule I***

Is any one of these true for your vehicle?

- Most trips are less than 4 miles (6 km).
- Most trips are less than 10 miles (16 km) when outside temperatures are below freezing.
- The engine is at low speed most of the time (as in door-to-door delivery, or in stop-and-go traffic).
- You operate your vehicle in dusty areas.
- You tow a trailer.

If any one (or more) of these is true for your driving, follow Schedule I.

### ***Schedule II***

Follow Schedule II **only** if none of the above conditions is true.

# Maintenance Schedule

## Section A: Scheduled Maintenance Services (Cont.)

### Schedule I

Follow Schedule I if your vehicle is **MAINLY** driven under one or more of the following conditions:

- When most trips are less than 4 miles (6 kilometers).
- When most trips are less than 10 miles (16 kilometers) and outside temperatures remain below freezing.
- When most trips include extended idling and/or frequent low-speed operation, as in stop-and-go traffic.
- When towing a trailer.
- When operating in dusty areas.

**Schedule I should also be followed if the vehicle is used for delivery service, police, taxi or other commercial applications.**

*\*An Emission Control Service.*

*☆The U.S. Environmental Protection Agency has determined that the failure to perform this maintenance item will not nullify the emission warranty or limit recall liability prior to the completion of vehicle useful life. General Motors, however, urges that all recommended maintenance services be performed at the indicated intervals and the maintenance be recorded in Section E: Maintenance Record.*

ITEM NO.	TO BE SERVICED <i>See Explanation of Scheduled Maintenance Services following Schedules I and II.</i>	WHEN TO PERFORM <i>Miles (kilometers) or Months (whichever occurs first).</i>
1	Engine Oil Change & Oil Filter Change*	Every 3,000 Miles (5 000 km) or 3 Months.
2	Chassis Lubrication	Every other oil change.
3	Throttle Body Mounting Bolt Torque*	At 6,000 Miles (10 000 km) only.
4	Tire and Wheel Inspection & Rotation	At 6,000 Miles (10 000 km) and every 15,000 Miles (25 000 km) or as necessary.
5	Engine Accessory Drive Belt Inspection*	Every 30,000 Miles (50 000 km) or 24 Months.
6	Cooling System Service*	Every 30,000 Miles (50 000 km) or 24 Months.
7	Transaxle Service	<i>See Explanation of Scheduled Maintenance Services following Schedules I and II.</i>
8	Spark Plug Replacement*	Every 30,000 Miles (50 000 km).
9	Spark Plug Wire Inspection* ☆	Every 30,000 Miles (50 000 km).
10	Air Cleaner Filter Replacement*	Every 30,000 Miles (50 000 km).
11	Fuel Tank, Cap & Lines Inspection* ☆	Every 30,000 Miles (50 000 km).

The services shown in this schedule up to 48,000 miles (80 000 km) are to be performed after 48,000 miles at the same intervals.

**MILES (000)**

3	6	9	12	15	18	21	24	27	30	33	36	39	42	45	48
---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----

**KILOMETERS (000)**

5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	•		•		•		•		•		•		•		•
	•														
	•					•					•				
									•						
									•						
									•						
									•						
									•						
									•						



# Maintenance Schedule

## Section A: Scheduled Maintenance Services (Cont.)

### Schedule II

Follow Schedule II ONLY if none of the driving conditions specified in Schedule I apply.

ITEM NO.	TO BE SERVICED <i>See Explanation of Scheduled Maintenance Services following Schedules I and II.</i>	WHEN TO PERFORM <i>Miles (kilometers) or Months (whichever occurs first).</i>
1	Engine Oil Change *	Every 7,500 Miles (12,500 km) or 12 Months.
	Oil Filter Change *	At first and every other oil change.
2	Chassis Lubrication	Every 7,500 Miles (12,500 km) or 12 Months.
3	Throttle Body Mounting Bolt Torque*	At 7,500 Miles (12,500 km) only.
4	Tire and Wheel Inspection & Rotation	At 7,500 Miles (12,500 km) and then every 15,000 Miles (25,000 km) or as necessary.
5	Engine Accessory Drive Belt Inspection*	Every 30,000 Miles (50,000 km) or 24 Months.
6	Cooling System Service*	Every 30,000 Miles (50,000 km) or 24 Months.
7	Transaxle Service	<i>See Explanation of Scheduled Maintenance Services following Schedules I and II.</i>
8	Spark Plug Replacement *	Every 30,000 Miles (50,000 km).
9	Spark Plug Wire Inspection* ☆	Every 30,000 Miles (50,000 km).
10	Air Cleaner Filter Replacement*	Every 30,000 Miles (50,000 km).
11	Fuel Tank, Cap and Lines Inspection* ☆	Every 30,000 Miles (50,000 km).

\*An Emission Control Service.

☆ The U.S. Environmental Protection Agency has determined that the failure to perform this maintenance item will not nullify the emission warranty or limit recall liability prior to the completion of vehicle useful life. General Motors, however, urges that all recommended maintenance services be performed at the indicated intervals and the maintenance be recorded in Section E: Maintenance Record.

The services shown in this schedule up to 45,000 miles (75 000 km) are to be performed after 45,000 miles at the same intervals.

**MILES (000)**

7.5	15	22.5	30	37.5	45
-----	----	------	----	------	----

**KILOMETERS (000)**

12.5	25	37.5	50	62.5	75
•	•	•	•	•	•
•		•		•	
•	•	•	•	•	•
•					
•		•		•	
			•		
			•		
			•		
			•		
			•		
			•		

# Maintenance Schedule

## Section A: Scheduled Maintenance Services (Cont.)

### Explanation of Scheduled Maintenance Services

Below are explanations of the services listed in Schedule I and Schedule II.

#### ITEM

#### NO. SERVICE

- 1 Engine Oil and Filter Change\***—Always use SG Energy Conserving II oils of proper viscosity. The “SG” designation may be shown alone or in combination with others, such as “SG/CC,” “SG/CD” or “SF, SG, CC,” etc. To determine the preferred viscosity for your vehicle’s engine (e.g., SAE 5W-30 or SAE 10W-30), see the *Index* under *Engine Oil*. If your vehicle is equipped with an Engine Oil-Change Indicator (EOCI) the indicator will show you when to change the oil. See the *Index* under *Driver Information System*.
- 2 Chassis Lubrication**—Lubricate the transaxle shift linkage, parking brake cable guides, underbody contact points and linkage. Lubricate the front and rear suspension and steering linkage.

The proper fluids and lubricants to use are listed in Section D. Make sure whoever services your vehicle uses these. All parts should be replaced and all necessary repairs done before you or anyone else drives the vehicle.

#### ITEM

#### NO. SERVICE

- 3 Throttle Body Mounting Bolt Torque\***—Check the torque of the mounting bolts and/or nuts.
- 4 Tire and Wheel Inspection and Rotation**—For proper wear and maximum tire life, rotate your tires following the instructions in this manual. See the *Index* under *Tires, Inspection & Rotation*. Check the tires for uneven wear or damage. If you see irregular or premature wear, check the wheel alignment. Check for damaged wheels also.

\*An Emission Control Service.

☆ The U.S. Environmental Protection Agency has determined that the failure to perform this maintenance item will not nullify the emission warranty or limit recall liability prior to the completion of vehicle useful life. General Motors, however, urges that all recommended maintenance services be performed at the indicated intervals and the maintenance be recorded in Section E: Maintenance Record.



**ITEM  
NO. SERVICE**

- 5 Engine Accessory Drive Belt Inspection\***—Inspect the belt for cracks, fraying, wear and proper tension. Replace as needed.
- 6 Cooling System Service\***—Drain, flush and refill the system with new or approved recycled coolant conforming to GM Specification 1825M. Keep coolant at the proper mixture as specified. See the *Index* under *Coolant*. This provides proper freeze protection, corrosion inhibitor level and engine operating temperature.
- Inspect hoses and replace if they are cracked, swollen or deteriorated. Tighten screw-type hose clamps. Clean the outside of the radiator and air conditioning condenser. Wash the pressure cap and neck.
- To help ensure proper operation, we recommend a pressure test of both the cooling system and the pressure cap.

**ITEM  
NO. SERVICE**

- 7 Transaxle Service**—Change both the fluid and filter every 15,000 miles (25 000 km) if the vehicle is mainly driven under one or more of these conditions:
- In heavy city traffic where the outside temperature regularly reaches 90°F (32°C) or higher.
  - In hilly or mountainous terrain.
  - When doing frequent trailer towing.
  - Uses such as found in taxi, police car or delivery service.
- If you do not use your vehicle under any of these conditions, change both the fluid and filter every 100,000 miles (160 000 km).
- 8 Spark Plug Replacement\***—Replace spark plugs with the proper type. See the *Index* under *Replacement Parts*.
- 9 Spark Plug Wire Inspection\*☆**—Inspect for burns, cracks or other damage. Check the boot fit at the coils and at the spark plugs. Replace wires as needed.

# Maintenance Schedule

## Section A: Scheduled Maintenance Services (Cont.)

### ITEM

#### NO. SERVICE

- 10 Air Cleaner Filter Replacement\***—Replace every 30,000 miles (50 000 km) or more often under dusty conditions. Ask your dealer for the proper replacement intervals for your driving conditions.

### ITEM

#### NO. SERVICE

- 11 Fuel Tank, Cap and Lines Inspection\*☆**—Inspect the fuel tank, cap and lines (including fuel rails and injection assembly) for damage or leaks. Inspect fuel cap gasket for an even filler neck imprint or any damage. Replace parts as needed. Periodic replacement of the fuel filter is not required.

\*An Emission Control Service.

☆The U.S. Environmental Protection Agency has determined that the failure to perform this maintenance item will not nullify the emission warranty or limit recall liability prior to the completion of vehicle useful life. General Motors, however, urges that all recommended maintenance services be performed at the indicated intervals and the maintenance be recorded in Section E: Maintenance Record.

## Section B: Owner Checks & Services

Listed below are owner checks and services which should be performed at the intervals specified to help ensure the safety, dependability and emission control performance of your vehicle.

Be sure any necessary repairs are completed at once. Whenever any fluids or lubricants are added to your vehicle, make sure they are the proper ones, as shown in Section D.

### **At Each Fuel Fill** (It is important for you or a service station attendant to perform these underhood checks at each fuel fill.)

CHECK OR SERVICE	WHAT TO DO
Engine Oil Level	Check the engine oil level and add the proper oil if necessary. See the <i>Index</i> under <i>Engine Oil</i> for further details.
Engine Coolant Level	Check the engine coolant level in the coolant recovery tank and add the proper coolant mix if necessary. See the <i>Index</i> under <i>Coolant</i> for further details.
Windshield Washer Fluid Level	Check the windshield washer fluid level in the windshield washer tank and add the proper fluid if necessary. See the <i>Index</i> under <i>Windshield Washer Fluid</i> for further details.

### **At Least Once a Month**


CHECK OR SERVICE	WHAT TO DO
Tire Inflation	Check tire inflation. Make sure they are inflated to the pressures specified on the Tire-Loading Information label located on the rear edge of driver's door. See the <i>Index</i> under <i>Tires</i> for further details.





# Maintenance Schedule

## Section B: Owner Checks & Services (Cont.)

### At Least Once a Year

CHECK OR SERVICE	WHAT TO DO
Key Lock Cylinders	Lubricate the key lock cylinders with the lubricant specified in Section D.
Body Lubrication	Lubricate all body door hinges. Also lubricate all hinges and latches, including those for the hood, rear compartment, glove box door, console doors and any folding seat hardware. Section D tells you what to use.
Starter Switch	<b>CAUTION</b>
	 When you are doing this check, the vehicle could move suddenly. If it does, you or others could be injured. Follow the steps below. <ol style="list-style-type: none"><li>1. Before you start, be sure you have enough room around the vehicle.</li><li>2. Firmly apply both the parking brake (see the <i>Index</i> under <i>Parking Brake</i> if necessary) and the regular brake.</li></ol> NOTE: Do not use the accelerator pedal, and be ready to turn off the engine immediately if it starts. <ol style="list-style-type: none"><li>3. Try to start the engine in each gear. The starter should work only in <b>P</b> (Park) or <b>N</b> (Neutral). If the starter works in any other position, your vehicle needs service.</li></ol>
Steering Column Lock	While parked, and with the parking brake set, try to turn the key to <b>Lock</b> in each shift lever position. <ul style="list-style-type: none"><li>• The key should turn to <b>Lock</b> only when the shift lever is in <b>P</b> (Park).</li><li>• The key should come out only in <b>Lock</b>.</li></ul>

CHECK OR SERVICE	WHAT TO DO
Brake-Transaxle Shift Interlock (BTSI)	<p><b>CAUTION</b></p> <p> When you are doing this check, the vehicle could move suddenly. If it does, you or others could be injured. Follow the steps below.</p> <ol style="list-style-type: none"> <li>1. Before you start, be sure you have enough room around the vehicle. It should be parked on a level surface.</li> <li>2. Firmly apply the parking brake (see the <i>Index</i> under <i>Parking Brake</i> if necessary).</li> </ol> <p>NOTE: Be ready to apply the regular brake immediately if the vehicle begins to move.</p> <ol style="list-style-type: none"> <li>3. With the engine off, turn the key to the <b>RUN</b> position, but don't start the engine. Without applying the regular brake, try to move the shift lever out of <b>P</b> (Park) with normal effort. If the shift lever moves out of <b>P</b> (Park), your vehicle's BTSI needs service.</li> </ol>
Parking Brake and Automatic Transaxle <b>P</b> (Park) Mechanism Check	<p><b>CAUTION</b></p> <p> When you are doing this check, your vehicle could begin to move. You or others could be injured and property could be damaged. Make sure there is room in front of your vehicle in case it begins to roll. Be ready to apply the regular brake at once should the vehicle begin to move.</p> <p>Park on a fairly steep hill, with the vehicle facing downhill. Keeping your foot on the regular brake, set the parking brake.</p> <ul style="list-style-type: none"> <li>• To check the parking brake: With the engine running and transaxle in <b>N</b> (Neutral), slowly remove foot pressure from the regular brake pedal. Do this until the vehicle is held by the parking brake only.</li> <li>• To check the <b>P</b> (Park) mechanism's holding ability: Shift to <b>P</b> (Park). Then release all brakes.</li> </ul>
Underbody Flushing	<p>At least every spring, use plain water to flush any corrosive materials from the underbody. Take care to clean thoroughly any areas where mud and other debris can collect.</p>



# Maintenance Schedule

## Section C: Periodic Maintenance Inspections

Listed below are inspections and services which should be performed at least twice a year (for instance, each spring and fall). You should let your GM dealer's service department or other qualified service center do these jobs. Make sure any necessary repairs are completed at once.

INSPECTION OR SERVICE	WHAT SHOULD BE DONE
Steering, Suspension and Front-Wheel-Drive Axle Boot and Seal Inspection	Inspect the front and rear suspension and steering system for damaged, loose or missing parts, signs of wear, or lack of lubrication. Inspect the power steering lines and hoses for proper hookup, binding, leaks, cracks, chafing, etc. Clean and then inspect the drive axle boot seals for damage, tears or leakage. Replace seals if necessary.
Exhaust System Inspection	Inspect the complete exhaust system. Inspect the body near the exhaust system. Look for broken, damaged, missing or out-of-position parts as well as open seams, holes, loose connections, or other conditions which could cause a heat build-up in the floor pan or could let exhaust fumes into the vehicle. See the <i>Index</i> under <i>Engine Exhaust</i> .
Throttle Linkage Inspection	Inspect the throttle linkage for interference or binding, and for damaged or missing parts. Replace parts as needed.
Brake System Inspection	Inspect the complete system. Inspect brake lines and hoses for proper hookup, binding, leaks, cracks, chafing, etc. Inspect disc brake pads for wear and rotors for surface condition. Also inspect drum brake linings for wear and cracks. Inspect other brake parts, including drums, wheel cylinders, calipers, parking brake, etc. Check parking brake adjustment. You may need to have your brakes inspected more often if your driving habits or conditions result in frequent braking.  NOTE: A low brake fluid level can indicate worn disc brake pads which may need to be serviced. Also, if the brake warning light stays on or comes on, something may be wrong with the brake system. See the <i>Index</i> under <i>Brake System Warning Light</i> . If your anti-lock brake system warning light stays on or comes on, something may be wrong with the anti-lock brake system. See the <i>Index</i> under <i>Anti-Lock Brake System Warning Light</i> .



## Section D: Recommended Fluids & Lubricants

NOTE: Fluids and lubricants identified below by name, part number or specification may be obtained from your GM dealer.

USAGE	FLUID/LUBRICANT
Engine Oil	GM Goodwrench Motor Oil or equivalent for API service SG Energy Conserving II oils of the proper viscosity. The "SG" designation may be shown alone or in combination with others, such as "SG/CC," "SG/CD," or "SF, SG, CC," etc. To determine the preferred viscosity for your vehicle's engine, see the <i>Index</i> under <i>Engine Oil</i> .
Engine Coolant	A 50/50 mixture of water (preferably distilled) and good quality ethylene glycol base antifreeze (GM Part No. 1052753 or equivalent) conforming to GM Specification 1825M or approved recycled coolant conforming to GM Specification 1825M.
Hydraulic Brake System	Delco Supreme II <sup>®</sup> Brake Fluid (GM Part No. 1052535) or equivalent DOT-3 brake fluid.
Parking Brake Guides	Chassis lubricant meeting requirements of NLGI Grade 2, Category LB or GC-LB (GM Part No. 1052497 or equivalent).
Power Steering System	GM Hydraulic Power Steering Fluid (GM Part No. 1052884) or equivalent.
Automatic Transaxle	DEXRON <sup>®</sup> -IIE Automatic Transmission Fluid (GM Part No. 12345881) or equivalent.

# Maintenance Schedule

## Section D: Recommended Fluids & Lubricants (Cont.)

USAGE	FLUID/LUBRICANT
Key Lock Cylinders	Lubricate with Multi-Purpose Lubricant (GM Part No. 12345120), synthetic SAE 5W-30 engine oil or silicone lubricant (GM Part No. 1052276 or 1052277).
Automatic Transaxle Shift Linkage	Engine oil.
Floor Shift Linkage	Engine oil.
Chassis Lubrication	Chassis lubricant meeting requirements of NLGI Grade 2, Category LB or GC-LB (GM Part No. 1052497 or equivalent).
Windshield Washer Solvent	GM Optikleen <sup>®</sup> Washer Solvent (GM Part No. 1051515) or equivalent.

USAGE	FLUID/LUBRICANT
Hood Latch Assembly a. Pivots and Spring Anchor b. Release Pawl	a. Engine oil. b. Chassis lubricant meeting requirements of NLGI Grade 2, Category LB or GC-LB (GM Part No. 1052497 or equivalent).
Hood and Door Hinges, Fuel Door Hinge, Rear Compartment Lid Hinges	Engine oil or Lubriplate Lubricant (GM Part No. 1050109).
Weatherstrips	Dielectric Silicone Grease (GM Part No. 12345579 or equivalent).

See the *Index* under *Replacement Parts* for recommended replacement filters, valves and spark plugs.



# Maintenance Schedule

## Section E: Maintenance Record

After the scheduled services are performed, record the date, odometer reading and who performed the service in the columns indicated. When completing the Maintenance Performed column, insert the numbers from the Schedule I

or Schedule II maintenance charts which correspond to the maintenance performed. Also, you should retain all maintenance receipts. Your owner information portfolio is a convenient place to store them.

<i>DATE</i>	<i>ODOMETER READING</i>	<i>SERVICED BY</i>	<i>MAINTENANCE PERFORMED</i>









## *Part 8*

# *Customer Assistance Information*

**Here you will find out how to contact Oldsmobile if you need assistance. This part also tells you how to obtain service publications and how to report any safety defects.**

Customer Satisfaction Procedure .....	298
Customer Assistance for the Hearing or Speech Impaired .....	299
BBB Mediation/Arbitration Program .....	300
Reporting Safety Defects .....	302
Oldsmobile Roadside Assistance Program .....	303
Service Publications .....	304

# Customer Assistance Information



## Customer Satisfaction Procedure

Your satisfaction and goodwill are important to your dealer and Oldsmobile. Normally, any problems with the sales transaction or the operation of your vehicle will be resolved by your dealer's Sales or Service Departments. Sometimes, however, despite the best intentions of all concerned, misunderstandings can occur. If your concern has not been resolved to your satisfaction, the following steps should be taken:

**STEP ONE:** Discuss your problem with a member of dealership management. Complaints can often be quickly resolved at that level. If the matter has already been reviewed with the Sales, Service, or Parts Manager, contact the owner of the dealership or the General Manager.

**STEP TWO:** If after contacting a member of Dealership Management, it appears your problem cannot be resolved by the dealership without further help, contact the Oldsmobile Customer Assistance Network by calling 1-800-442-6537. (In Canada, contact GM of Canada Customer Assistance Center in Oshawa by calling 1-800-263-3777 (English) or 1-800-263-7854 (French).

In Mexico, call 254-17-86. In Puerto Rico or U.S. Virgin Islands, call 1-809-763-1315. In all other overseas locations, contact GM International Export Sales in Canada by calling 1-416-644-4112.

For prompt assistance, please have the following information available to give the Customer Assistance Representative:

- Your name, address, telephone number
- Vehicle Identification Number (This is available from the vehicle registration or title, or the plate attached to the left top of the instrument panel and visible through the windshield.)
- Dealership name and location
- Vehicle delivery date and present mileage
- Nature of problem

In order to give your inquiry prompt attention, please call the toll-free number listed above. However, if you wish to write Oldsmobile, write to:

**United States**

Customer Assistance Representative  
Oldsmobile Central Office  
920 Townsend St.  
P. O. Box 30095  
Lansing, MI 48909

**Canada**

Customer Assistance Center  
General Motors of Canada Limited  
Oshawa, Ontario L1H 8P7

A listing of all Oldsmobile Zone Offices and offices outside the U.S. which can assist you can also be found in the warranty booklet.

When contacting Oldsmobile, please remember that your problem will likely be resolved in the dealership, using the dealership's facilities, equipment and personnel. That is why we suggest you follow Step One first if you have a problem.

***Customer Assistance For the Hearing or Speech Impaired***

To assist owners who have hearing difficulties, Oldsmobile has installed special TDD (Telecommunication Devices for the Deaf) equipment in its Customer Assistance Network offices. Any hearing or speech impaired customer who has access to a TDD or a conventional teletypewriter (TTY) can communicate with Oldsmobile by dialing: 1-800-TDD-OLDS.

(TDD users in Canada can dial 1-800-263-3830.)



## *Customer Assistance Information*

### ***GM Participation In Better Business Bureau Mediation/Arbitration Program\****

Our experience has shown that the Customer Satisfaction Procedure described earlier in this section has been very successful in achieving customer satisfaction. However, if you have not been substantially satisfied, Oldsmobile wants you to be aware of GM's voluntary participation in a no-charge mediation/arbitration program called BBB AUTO LINE. This program is administered by the Council of Better Business Bureaus through local Better Business Bureaus.

The program can resolve individual disputes involving vehicle repairs and the interpretation of your New Vehicle Limited Warranty.

We prefer that you not resort to BBB AUTO LINE until after a final decision is made under the Customer Satisfaction Procedure. However, you may file a claim at any time by contacting your local Better Business Bureau (BBB) at the following toll-free number: 1-800-955-5100. For further information about filing a claim, you may also write to:

BBB AUTO LINE  
Council of Better Business Bureaus  
4200 Wilson Boulevard  
Suite 800  
Arlington, VA 22203

In order to file a claim, you will have to provide your name and address, the vehicle identification number (VIN) of your vehicle, and a statement of the nature of your complaint. BBB staff may try to help resolve your dispute through mediation. If mediation is not successful, or if you do not wish to participate in mediation, eligible customers may present their case to an impartial third-party arbitrator at an informal hearing. The arbitrator will render a decision in your case, which you may accept or reject. If you accept a valid arbitrator decision, GM will be bound by that decision. The entire dispute settlement process should ordinarily take about 40 days from the time you file your complaint to the time a

decision is rendered (or 47 days if you did not first contact your dealer or Oldsmobile).

We encourage you to use this program before or instead of resorting to the courts. We believe it offers advantages over courts in most jurisdictions because it is fast, free of charge, and informal (lawyers are not usually present, although you may retain one at your expense if you choose). Arbitrators make decisions based on the principles of fairness and equity, and are not required to duplicate the functions of courts by strictly applying state or federal law. If you wish to go to court, however, we do not require that you first file a claim with BBB AUTO LINE\*\* unless state law provides otherwise.

Whatever your preference may be, remember that if you are unhappy with the results of BBB AUTO LINE, you can still go to court because an arbitrator's decision is binding on GM but not on you, unless you accept it.

Eligibility is limited by vehicle age/mileage and other factors. For further information concerning the program, call the BBB at 1-800-955-5100. You may also call the Oldsmobile Customer Assistance Network.

*\* This program may not be available in all states, depending on state law. General Motors reserves the right to change eligibility limitations and/or to discontinue its participation in this program.*

*\*\* Some states may require that you file a claim with BBB AUTO LINE before resorting to state-operated procedures (including court).*

# *Customer Assistance Information*

## ***Reporting Safety Defects to the United States Government***

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA), in addition to notifying General Motors.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or General Motors.

To contact NHTSA, you may either call the Auto Safety Hotline toll-free at 1-800-424-9393 (or 366-0123 in the Washington, D.C. area) or write to:

NHTSA  
U.S. Department of Transportation  
Washington, D.C. 20590

You can also obtain other information about motor vehicle safety from the Hotline.

## ***Reporting Safety Defects to the Canadian Government***

If you live in Canada, and you believe that your vehicle has a safety defect, you should immediately notify Transport Canada, in addition to notifying General Motors of Canada Ltd. You may write to:

Transport Canada  
Box 8880  
Ottawa, Ontario K1G 3J2

## ***Reporting Safety Defects to General Motors***

In addition to notifying NHTSA (or Transport Canada) in a situation like this, we certainly hope you'll notify us. Please call us at **1-800-442-6537**, or write:

Oldsmobile Customer  
Assistance Network  
P.O. Box 30095  
Lansing, Michigan 48909

In Canada, please call us at 1-800-263-3777 (English) or 1-800-263-7854 (French). Or, write:

General Motors of Canada Limited  
Customer Assistance Center  
1908 Colonel Sam Drive  
Oshawa, Ontario L1H 8P7





## ■ *Oldsmobile Roadside Assistance Program Features & Benefits*

The Oldsmobile Roadside Assistance program means help is just a toll-free call away—24 hours a day, 365 days a year.

Courteous and capable Customer Assistance Advisors are on-call to provide you with prompt assistance.

## *24-Hour Oldsmobile Roadside Assistance Number*

1-800-535-OLDS (6537) is the one number to call for assistance in the United States. Trained Customer Assistance Advisors, on-call to render assistance to Oldsmobile drivers, can dispatch roadside assistance and towing service, locate the nearest Oldsmobile dealership, take your request for an Oldsmobile computerized trip routing or simply answer any questions the Oldsmobile driver may have about the coverage provided by your Oldsmobile Roadside Assistance Program. The Oldsmobile Roadside Assistance number is fully staffed and operational 24 hours a day, 365 days a year.

## *Who Is Covered?*

Oldsmobile Roadside Assistance covers all 1993 Oldsmobile vehicles.\*

Coverage is for the Oldsmobile vehicle, *regardless of the driver*, and is concurrent with the Bumper-to-Bumper Plus warranty period.

Oldsmobile reserves the right to limit services or reimbursement to an owner or driver when in Oldsmobile's judgement the claims become excessive in frequency or type of occurrence.

*\*In Canada, please consult your GM dealer regarding availability of Roadside Assistance.*

# *Customer Assistance Information*

## ■ *Service Publications*

Information on how to obtain Product Service Publications, Subscriptions and Indexes as described below is applicable only in the fifty U.S. states (and the District of Columbia) and only for cars and light trucks with GVWR less than 10,000 pounds (4 536 kg).

In Canada, information pertaining to Product Service Bulletins and Indexes can be obtained by writing to:

General Motors of Canada Limited  
Service Publications Department  
1908 Colonel Sam Drive  
Oshawa, Ontario L1H 8P7.

Oldsmobile regularly sends its dealers useful service bulletins about Oldsmobile products. Oldsmobile monitors product performance in the field. We then prepare bulletins for servicing our products better. Now, you can get these bulletins too.

Bulletins cover various subjects. Some pertain to the proper use and care of your vehicle. Some describe costly repairs. Others describe inexpensive repairs which, if done on time with the latest parts, may avoid future costly repairs. Some bulletins tell a technician how to repair a new or unexpected condition. Others describe a quicker way to fix your vehicle. They can help a technician service your vehicle better.

Most bulletins apply to conditions affecting a small number of cars or trucks. Your Oldsmobile dealer or a qualified technician may have to determine if a specific bulletin applies to your vehicle.

You can subscribe to all Oldsmobile bulletins. This way you'll get them as they come out. You can wait a while and get an index to the bulletins. You can also get individual bulletins. However, you'll need the index to identify them.

## ***Subscriptions***

You can subscribe to all Oldsmobile Product Service Publications (PSP's). This will include bulletins for all vehicles sold by Oldsmobile and will not be limited to PSP's applicable to any particular model. When you buy a subscription, you will receive the PSP's in periodic mailings, shortly after they come out. A subscription costs \$100 U.S. and includes a special binder and it entitles you to all PSP's published by Oldsmobile during the model year.\* You can purchase a subscription by sending a check or money order to Lansing Lithographers, P.O. Box 23188, Lansing, Michigan 48909, along with the order form located in the following text.

You may get additional subscription ordering forms by calling the toll-free number shown in the following text.

*\*Prices subject to change.*

### ***Individual PSP's***

If you don't want to buy all the PSP's issued by Oldsmobile for all models in the model year, you can buy individual PSP's, such as those which may pertain to a particular model. To do this, you will first need to see our index of PSP's. It provides a variety of information. Here's what you'll find in the index and how you can get one:

### ***What You'll Find in the Index***

- A list of all PSP's published by Oldsmobile in a model year (1989 or later). PSP's covering all models of Oldsmobile vehicles are listed in the same index.
- Ordering information so you can buy the specific PSP's you may want.
- Price information for the PSP's you may want to buy.



# Customer Assistance Information

## ***How You Can Get an Index***

Indexes are published periodically. Most of the PSP's which could potentially apply to the most recent Oldsmobile models will be listed in the most recent publication for that model year. This means you may want to wait until the end of the model year before ordering an index, if you are interested in buying PSP's pertaining to a current model year car or truck.

Some PSP's pertaining to a particular model year vehicle may be published in later years, and these would be listed in the later year's index. When you order an index for a model year that is not over yet, we'll send you the most recently published issue. Check the order form for indexes for earlier model years.

Cut out the order form, fill it out, and mail it in. We will then see to it that an index is mailed to you. There is no charge for indexes for the 1989-1993 model years.

### **Toll-Free Telephone Number**

If you want an additional ordering form for an index or a subscription, just call toll-free and we'll be happy to send you one. Automated recording equipment will take your name and mailing address. The number to call is 1-800-551-4123.

### **Copies at Participating Dealers**

Copies of indexes and individual PSP's are at your participating Oldsmobile dealer. You can ask to see them.

## **A Very Important Reminder**

These PSP's are meant for technicians. They are not meant for the "do-it-yourselfer." Technicians have the equipment, tools, safety instructions, and know-how to do a job quickly and safely.

## ***Oldsmobile Service Publications***

You can get these by using the following order form. They include: Product Service Publications, Service Manuals and Owner Publications.

If the order form is missing, you can write:

Lansing Lithographers  
P.O. Box 23188  
Lansing, Michigan 48909

# Publication Order Form

Oldsmobile Division service publications are intended for use by professional, qualified technicians. Attempting repairs or service without the appropriate training, tools, and equipment could cause injury to you or others and damage to your vehicle that may cause it not to operate properly.

## Product Service Publications Indexes

(Mailed at no charge)

MODEL YEAR	QUANTITY
1993 Model Year	
1992 Model Year	
1991 Model Year	
1990 Model Year	
1989 Model Year	

## Individual Product Service Publications

PSP NUMBER*	SERVICE GUILD MONTH/YEAR**	QUANTITY	EACH	SUBTOTAL
		1	\$4.00	\$4.00
			2.00	
			2.00	
			2.00	
			2.00	
			2.00	
			2.00	
			2.00	
First item per order is \$4; each additional item is \$2			<b>SUBTOTAL</b>	

\* Orders cannot be filled without appropriate numbers. These numbers are in the PSP Index.

\*\* No additional charge for other items from the same Service Guild issue.

# Publication Order Form

<b>Subscription Service</b>	<i>QUANTITY</i>	<i>PRICE*</i>	<i>SUBTOTAL</i>
1993 Model Year with Binder		\$100.00	
1992 Model Year with Binder		100.00	
1991 Model Year with Binder		100.00	
1990 Model Year with Binder		100.00	
1989 Model Year with Binder		100.00	
Subtotal Subscription Service			
Subtotal Service Publications (From Front)			
<b>Total Order</b>			

\* Price subject to change.

Mail Order Form and check or money order (in U.S. funds) payable to:

**Lansing Lithographers**  
**P. O. Box 23188**  
**Lansing, Michigan 48909**

Allow about 4 weeks for handling and mailing.

**NAME** (Type or Print)

---

**STREET ADDRESS**

---

**CITY, STATE, ZIP CODE**

---



# 1993 Service Manuals Order Form

<i>Service Manuals</i>	<i>QUANTITY</i>	<i>PRICE*</i>	<i>SUBTOTAL</i>
Eighty Eight/Ninety Eight		\$40.00	
Achieva		43.00	
Cutlass Ciera & Cutlass Cruiser		41.00	
Cutlass Supreme		50.00	
Silhouette		41.00	
Bravada		38.00	
<b>Total Order</b> (Includes Shipping & Handling, US order only. Foreign orders must remit U.S. funds and add \$10 for each Service Manual to cover postage and handling.)			

Check here for free order form for past-model Service Manuals

\* Price subject to change without prior notice.

Mail Order Form and check or money order (in U.S. funds) payable to:

**Lansing Lithographers**  
**P.O. Box 23188**  
**Lansing, Michigan 48909**

Allow about 4 weeks for handling and mailing.

NAME (Type or Print)

---

STREET ADDRESS

---

CITY, STATE, ZIP CODE

---



# Index

- A**BS Warning Light . . . . . 105  
Accessory Power Outlets . . . . . 87  
Adding  
  Brake Fluid . . . . . 242  
  Electrical Equipment . . . . . 263  
  Engine Coolant . . . . . 238  
  Engine Oil . . . . . 229  
  Power Steering Fluid . . . . . 240  
  Sound Equipment . . . . . 136  
  Transaxle Fluid . . . . . 236  
  Windshield Washer Fluid . . . . . 240  
Air Bag (see *Supplemental Inflatable Restraint*)  
Air Cleaner Filter . . . . . 232  
Air Conditioner . . . . . 128, 131  
Alcohol, Driving Under the Influence  
  of . . . . . 153  
Alcohol in Gasoline . . . . . 223  
Aluminum Wheels  
  Cleaning . . . . . 260  
  Removing . . . . . 252  
Antenna  
  Fixed . . . . . 145  
  Power . . . . . 145  
Antifreeze . . . . . 236  
Anti-Lock Brake  
  System (ABS) . . . . . 105, 157  
Anti-Lock Brake System  
  Warning Light . . . . . 105  
Anti-Theft Tips . . . . . 51  
Appearance Care . . . . . 254  
Armrest, Storage . . . . . 85  
Ashtrays & Lighter . . . . . 87  
Audio Systems . . . . . 136  
  AM/FM Stereo Radio . . . . . 137  
  AM/FM Stereo Radio with  
    Cassette Player . . . . . 138  
  AM/FM Stereo with Cassette Player  
    and Graphic Equalizer . . . . . 140  
  Care of Audio Systems . . . . . 144  
  Compact Disc Player . . . . . 142  
  Radio Reception, For the Best . . . 143  
  Setting the Clock . . . . . 136  
  Steering Wheel Touch Controls . . 143  
Automatic Electronic Climate  
  Control . . . . . 131  
Automatic Transaxle  
  Adding Fluid . . . . . 236  
  Checking Fluid . . . . . 235  
  Shifting . . . . . 60  
**B**attery . . . . . 243  
  Jump Starting . . . . . 195  
Battery Warning Light  
  Electronic . . . . . 111  
  Standard . . . . . 110  
Blizzard . . . . . 182  
Block Heater, Engine . . . . . 58  
Blowout, Tire . . . . . 209  
Brake  
  Fluid . . . . . 241  
  Master Cylinder . . . . . 241  
  Parking . . . . . 65  
  Warning Light . . . . . 107, 111  
  Wear Indicators—Front Brakes . . 160  
Brake System Warning Light  
  Electronic . . . . . 111  
  Standard . . . . . 107  
Brakes, Anti-Lock . . . . . 157  
  Warning Light . . . . . 105  
Braking . . . . . 156  
Braking in Emergencies . . . . . 161  
Braking Technique . . . . . 156  
Break-In, New Vehicle . . . . . 55  
Buckling Up (see *Safety Belts*)



# Index

- Bulb Replacement
  - Headlight . . . . . 244, 272
  - Taillight . . . . . 245, 272
- Bulbs, Replacement . . . . . 272

- C**apacities and Specifications . . . . . 268
- Carbon Monoxide in Exhaust . . 69, 182
- Cassette Tape Player (see *Audio Systems*)
- Center Passenger Position . . . . . 29
- Chains, Tire . . . . . 253
- Changing a Flat Tire . . . . . 209
- Change Oil Reminder . . . . . 119
- Checking
  - Brake Fluid . . . . . 241
  - Engine Coolant . . . . . 238
  - Engine Oil Level . . . . . 229
  - Power Steering Fluid . . . . . 240
  - Transaxle Fluid . . . . . 234
  - Restraint Systems . . . . . 43
- Check Oil Level Warning Light . . 109, 113
- Child Restraints . . . . . 33
- Child Security Locks . . . . . 50
- Children and Safety Belts . . . . . 32
- Cigarette Lighter . . . . . 87
- Circuit Breakers & Fuses . . . . . 264

- City Driving . . . . . 172
- Cleaner, Air . . . . . 232
- Cleaning
  - Aluminum Wheels . . . . . 260
  - Cassette Player . . . . . 144
  - Compact Discs . . . . . 145
  - Delco-Bose® Speaker Covers . . . 258
  - Fabric . . . . . 255
  - Glass . . . . . 258
  - Inside of Your Vehicle . . . . . 255
  - Leather and Vinyl . . . . . 257
  - Outside of Your Vehicle . . . . . 259
  - Power Antenna . . . . . 145
  - Safety Belts . . . . . 258
  - Special Problems . . . . . 256
  - Underbody Maintenance . . . . . 262
  - Warnings . . . . . 254, 255, 258, 260
  - Weatherstrips . . . . . 260
  - White Sidewall Tires . . . . . 260
  - Windshield . . . . . 259
- Clock, Setting the . . . . . 136
- Clusters, Instrument Panel . . . . . 92
- Coin/Cup Holder . . . . . 85
- Comfort Controls . . . . . 127
  - Automatic Electronic Climate Control . . . . . 131

- Four Season Climate Control . . . . 128
- Steering Wheel Touch Controls . . 133
- Ventilation, Flow-Through . . . . . 135
- Compact Disc Player
  - (see *Audio Systems*)
- Compact Spare Tire . . . . . 217
- Convenience Net . . . . . 55
- Convex Mirror, Outside . . . . . 84
- Coolant . . . . . 236
  - Checking & Adding . . . . . 238
  - Proper Mixture to Use . . . . . 237
  - Safety Warnings
    - About . . . . . 237, 238, 239
  - Temperature Gage
    - Electronic Cluster . . . . . 100
    - Standard Cluster . . . . . 98
    - Temperature Warning Light . . 98, 100
- Cornering Lights . . . . . 80
- Cruise Control . . . . . 75
- Curves, Driving on . . . . . 161
- Customer Assistance Information . . 297

- D**aytime Running Lights . . . . . 80
- Dead Battery: What to Do . . . . . 195
- Defects, Reporting Safety . . . . . 302

Defensive Driving	152
Defogger, Rear Window	130, 134
De-Icer, Windshield	129
Door Locks	47
Downshifting	63, 177
Driver Information System	116
Driver Position	19
Driver's Side SIR ("Air Bag")	25
Driving	152
At Night	166
City	172
Controlling a Skid	165
Defensively	152
Drunken	153
Foreign Operation	224
Freeway	173
Hill and Mountain Roads	177
In a Foreign Country	224
In Fog, Mist and Haze	171
In Rain	169
Long Distance	175
Loss of Control	165
On Curves	161
Passing	164
Winter Driving	180
With a Trailer	188
Drunken Driving	153

<b>E</b> lectrical Equipment, Adding	263
Electrochromic Day/Night Mirror	83
Electronic Cluster	92
Electronic Level Control	246
Emergencies, Braking in	161
Emergencies on the Road	193
Emergencies, Steering in	162
Emergency Starting	195
Emergency Towing	199
Engine Block Heater	58
Engine Coolant	236
Engine Coolant Temperature Warning Light (see <i>Coolant</i> )	
Engine Exhaust	69
Engine Identification	263
Engine Oil	229
Additives	231
Capacities and Specifications	268
Check Level Warning Light	109, 113
Checking & Adding	229
Disposing of Used Oil	232
Energy Conserving	230
Warning Light	108, 113
When to Change	231
Engine Overheating	203
Engine Specifications	269

Engine Speed Warning	125
Engine, Starting	57
Ethanol in Gasoline	223
Exhaust	
Dangerous Gas in	69
Parking with the Engine Running	70
Expectant Mothers, Use of Safety Belts	28
Expressway Driving	173
Extender, Safety Belt	42
Exterior Appearance (see <i>Appearance Care</i> )	
<b>F</b> abric Cleaning (see <i>Appearance Care</i> )	
Filling the Fuel Tank	225
Filter	
Air Cleaner	233, 269
Fuel	269
Oil	232, 269
Flashers, Hazard Warning	194
Flat Tire	209
Flooded Engine	57
Fluid	
Brake	242, 270
Capacities	268
Power Steering	240, 268, 271



# Index

Transaxle	234, 268, 270
Windshield Washer	74, 240, 271
Fluids & Lubricants	270
Fog, Driving in	171
Foreign Operation	224
Four Season Climate Control	128
Freeway Driving	173
French Language Manual	2
Front Window De-Ice	129
Fuel	223
Alcohol in Fuel	223
Capacity	223
Exhaust Warnings	69
Filling Your Tank	225
Foreign Countries	224
Fuels with Alcohol	223
Gage	97, 99
Low, Warning Light	97, 99
Requirements	223
Fuse Panel	265
Fuses & Circuit Breakers	264
<b>G</b> ages	
Electronic Cluster	
Coolant Temperature	100
Fuel	99

Standard Cluster	
Coolant Temperature	98
Fuel	97
Gasoline	224
Gasoline Tank, Filling Your	225
Gas Station Information	320
Gear Positions	
(see <i>Shifting the Transaxle</i> )	
Gearshift Lever (see <i>Shifting the Transaxle</i> )	
Glove Box	55
Graphic Equalizer (see <i>Audio Systems</i> )	
<b>H</b> alogen Bulb Replacement	244
Hazard Warning Flashers	182
Headlight & Taillight, Removing and Replacing	244
Headlights	79
High-Low Beam Changer	81
Instrument Panel Intensity	
Control	81
"On" Reminder	80
Replacement Bulb	244
Wiring	267
Head Restraints	14
Heater (see <i>Comfort Controls</i> )	

Heater, Engine Block	58
High Beams	81, 168
Highway Hypnosis	176
Hill and Mountain Roads	177
Hills, Parking on	178, 190
Hood Release	226
Safety Warning	227
Warning, Overheated Engine	203
Horn	70
Hot Engine, Safety Warnings	203
How the Anti-Lock Brake System Works	158
Hydroplaning	170
<b>I</b> dentification Number, Vehicle	262
Idling Your Engine	70
If You're Stuck: In Sand, Mud, Ice or Snow	218
Ignition	
Key	46
Switch Positions	56
Illuminated Entry	53
Indicator Lights (see <i>Warning Lights</i> )	
Infant Restraint (see <i>Child Restraints</i> )	
Inflatable Restraint	23
Inflatable Restraint Warning Light	24



Inflation, Tires . . . . .	248
Inside Rearview Mirror	
Electrochromic . . . . .	83
Manual Day/Night . . . . .	83
Instrument Panel . . . . .	89
Instrument Panel Clusters . . . . .	92
Instrument Panel Warning	
Lights . . . . .	104, 107, 111
Intensity Control . . . . .	81
<b>J</b> ack, Tire . . . . .	210
Jump Starting . . . . .	195
<b>K</b> eys . . . . .	46
<b>L</b> ane Change Indicator . . . . .	72
Lap-Shoulder Safety Belt	
Front . . . . .	20
Rear . . . . .	30
Use by Children . . . . .	32
Lighter . . . . .	87
Lights	
Bulb Messages . . . . .	272
Cornering . . . . .	80
Daytime Running Lights . . . . .	80

Headlights . . . . .	79
"On" Reminder . . . . .	80
Reading . . . . .	82
Removing & Replacing	
Bulbs . . . . .	230, 244, 245
Replacement Bulbs . . . . .	272
Taillights . . . . .	245
Turn Signal . . . . .	72
Underhood . . . . .	227
Warning Lights . . . . .	104, 107, 111
Loading Your Vehicle . . . . .	246
Locks . . . . .	47
Locks, Remote Control . . . . .	48
Long Distance Driving . . . . .	175
Low Battery . . . . .	195
Low Fuel Warning . . . . .	97, 99
Low Oil Level Warning . . . . .	108, 109, 113
Low Washer Fluid Warning . . . . .	110
Lubricants and Fluids . . . . .	270
<b>M</b> aintenance Record . . . . .	294
Maintenance Schedule . . . . .	275
Malfunction Indicator Lamp . . . . .	104
Manual Front Seat . . . . .	12
Methanol in Gasoline . . . . .	223

Mileage Indicator	
(see <i>Odometer &amp; Speedometer</i> )	
Mirrors	
Inside Electrochromic Rearview . . . . .	83
Inside Manual Rearview . . . . .	83
Manual Remote Control . . . . .	84
Outside Convex . . . . .	84
Power Remote Control . . . . .	84
Visor Vanity . . . . .	85
Mountain Driving . . . . .	177
<b>N</b> et, Convenience . . . . .	55
New Vehicle Break-In . . . . .	55
Night Driving . . . . .	166
<b>O</b> ctane Requirements	
(see <i>Fuel Requirements</i> )	
Odometer & Speedometer	
Electronic . . . . .	95
Standard . . . . .	94
Oil, Engine . . . . .	229
Capacity . . . . .	268
Change Oil Reminder . . . . .	120
Check Oil Light . . . . .	103, 109, 113
Disposing of Used Oil . . . . .	232
Pressure Warning . . . . .	103

# Index

Quality .....	230
Thickness .....	230
Warning Light .....	108, 109, 113
When to Change .....	231
Outside Rearview Mirrors .....	84
Overdrive, Automatic .....	63
Overheated Engine .....	203
Warnings .....	203
Overheated Engine Coolant	
Warning .....	203, 206, 239

<b>P</b>	
Park .....	60
Shifting Into .....	66
Shifting Out of .....	68
Parking	
On Hills .....	178
Over Things That Burn .....	69
With the Engine Running .....	68
Parking Brake .....	65
PASS-Key® System .....	52
Passenger Belts (see <i>Safety Belts</i> )	
Passing .....	164
Polishing and Waxing	
(see <i>Appearance Care</i> )	
Power Antenna .....	145
Power Door Locks .....	48

Power Mirrors .....	84
Power Outlets .....	87
Power Seat Controls .....	13
Power Steering .....	161
Power Steering Fluid .....	240, 268, 271
Power Windows .....	71, 267
Pregnancy, Use of Safety Belts	
During .....	28
Publications (see <i>Service Publications</i> )	

<b>R</b>	
Radiator Overheating	
(see <i>Overheated Engine</i> )	
Radiator Pressure Cap .....	239
Radio (see <i>Audio Systems</i> )	
Reading Lights .....	82
Rear Door Security Locks .....	50
Rear Window Defogger .....	130, 134
Rearview Mirror	
Electrochromic .....	83
Manual .....	83
Reclining Seatback .....	13
Remote Lock Control .....	48
Remote Trunk Release .....	48, 54
Replacement Bulbs .....	272
Replacement Parts .....	269
Replacement, Windshield Wiper .....	245

Replacing Bulbs	
Headlight .....	244
Taillight .....	245
Replacing Safety Belts .....	43
Replacing Tires .....	250
Replacing Wheels .....	252
Reporting Safety Defects .....	302
Restraints, Child .....	33
Restraints, Head .....	14
Retained Accessory Power .....	56
Roadside Assistance .....	303
Road Signs .....	148
Color .....	148
Shape .....	149
Traffic Lights .....	150
Your Own Signals .....	151
Roads, Hill and Mountain .....	177
Rocking Your Vehicle .....	219
Rotation, Tire .....	249

<b>S</b>	
Safety Belts .....	14
Adults .....	19
Babies .....	32
Center Passenger Position .....	29
Checking .....	43
Children .....	32



Child Restraints . . . . .	33	Seat Adjustment . . . . .	12, 43	Six-Way Power Seat . . . . .	13
Child Restraints—How to		Head Restraints . . . . .	14	Skidding . . . . .	165
Install Them . . . . .	34	Manual Front Seat . . . . .	12	Snowstorm, If You're	
Child Restraints, Where to Put . . . . .	34	Manual Reclining Seatback . . . . .	13	Caught in a . . . . .	182
Cleaning . . . . .	258	Power Seat, Six-Way . . . . .	13	Sound Equipment, Adding . . . . .	136
Driver Position . . . . .	19	Reclining Seatback . . . . .	13	Sound Systems (see <i>Audio Systems</i> )	
Extender . . . . .	42	Seat Belts (see <i>Safety Belts</i> )		Spare Tire, Compact . . . . .	217
How to Wear . . . . .	19	Seat Controls . . . . .	12	Specifications and Capacities . . . . .	268
Lap Belt . . . . .	29	Security Light . . . . .	53	Speed Control (see <i>Cruise Control</i> )	
Lap-Shoulder Belt . . . . .	20	Service Engine Soon Light		Speedometer & Odometer	
Passenger Belts . . . . .	29	(Malfunction Indicator Lamp) . . . . .	104	Electronic . . . . .	95
Pregnancy, Use During . . . . .	28	Service Information . . . . .	222	Standard . . . . .	94
Questions & Answers . . . . .	22	Service Parts Identification Label . . . . .	263	Stains, Removing . . . . .	256
Rear Seat Passengers . . . . .	30	Service Publications . . . . .	304	Starting Your Engine . . . . .	57
Reminder Light . . . . .	19	Service Publications Order		Starting Your Vehicle if the Battery	
Replacement . . . . .	43	Form . . . . .	307	is "Dead" (see <i>Jump Starting</i> )	
Right Front, Adult Passenger . . . . .	29	Service Station Information . . . . .	320	Steering	
Shoulder Belt Height Adjuster . . . . .	21	Setting the Clock . . . . .	136	In Emergencies . . . . .	162
Supplemental Inflatable		Setting the Trip Odometer . . . . .	94, 95	Off-Road Recovery . . . . .	163
Restraint (SIR) . . . . .	23	Shifting Into <b>P</b> (Park) . . . . .	66	Tips . . . . .	161
Torn . . . . .	43	Shifting Out of <b>P</b> (Park) . . . . .	68	Steering Wheel, Tilt . . . . .	71
Twisted . . . . .	23	Shifting the Transaxle . . . . .	60	Steering Wheel Touch Controls	
Why You Should Wear		Signaling Turns . . . . .	72, 151	Audio System . . . . .	143
Safety Belts . . . . .	16	Signs, Road . . . . .	148	Climate Control . . . . .	133
Safety Defects, Reporting . . . . .	302	SIR (Supplemental Inflatable		Stereo Sound Systems	
Scheduled Maintenance Services . . . . .	278	Restraint) . . . . .	23	(see <i>Audio Systems</i> )	



# Index

Storing Your Vehicle	243
Storage	
Armrest	85
Coin/Cup Holder	85
Convenience Net	55
Glove Box	55
Sun Visors	85
Sunglasses Storage	82
Supplemental Inflatable Restraint (SIR)	23
Light	24
Servicing Oldsmobiles with SIR	27

## Tape Player (see *Audio Systems*)

### Technical Facts & Specifications

Bulbs	272
Electrical Equipment, Add-On	263
Engine Specifications	269
Fluid Capacities & Types	268, 270
Fuses & Circuit Breakers	264
Replacement Parts	269
Service Parts Identification	
Label	263

Vehicle Identification Number (VIN)	262
Temperature Warning	98, 100, 102
Theft-Deterrent System	51
Thermostat	239
Tilt Steering Wheel	71
Time, Setting the	136
Tires	247
Blowout	209
Buying New	250
Chains	217, 253
Flat, Changing	209
Inflation	248
Inspection & Rotation	249
Loading	246
Pressure	248
Quality Grading	250
Spare, Compact	217
Wear Indicators	249
Wheel Alignment & Tire Balance	252
Wheel Replacement	252
When to Replace Wheels	252
Winter Driving	180
Top Strap	34
Torque Lock	180
Towing a Trailer	183

Towing Your Oldsmobile	199
Traction Control	159
Traction Control Warning Light	106
Traffic Lights	150
Trailer Towing	183
Transaxle, Automatic (see <i>Automatic Transaxle</i> )	
Transmission, Automatic (see <i>Automatic Transaxle</i> )	
Trip Odometer	
Electronic	95
Standard	94
Trunk	
Convenience Net	55
Lock	54
Release, Remote	48, 54
Security Override	54
Turn Signal Indicator	72
Turn Signal/Headlight Beam Lever	72
Cruise Control	75
Headlight High-Low Beam Changer	81
Pulse Windshield Wiper	73
Turn & Lane Change Signals	72
Turn Signal Indicator	72
Windshield Washer	73

Windshield Wipers . . . . .	73
<b>U</b> nderhood Light . . . . .	227
Unleaded Gasoline . . . . .	223
Upholstery Care . . . . .	255
Urban Driving . . . . .	172

<b>V</b> ehicle Identification Number (VIN) . . . . .	262
Vehicle Loading . . . . .	246
Vehicle Storage . . . . .	243
Ventilation . . . . .	129
VIN . . . . .	262
Visor Vanity Mirror . . . . .	85
Voltmeter . . . . .	101

<b>W</b> arning Flashers, Hazard . . . . .	194
Warning Lights	
Anti-Lock Brake System . . . . .	105
Battery . . . . .	110, 112
Brake System . . . . .	107, 111
Check Oil . . . . .	109, 113
Coolant Temperature . . . . .	108

Engine Speed . . . . .	126
Inflatable Restraint . . . . .	24
Low Coolant . . . . .	110
Low Washer Fluid . . . . .	110
Oil . . . . .	108, 113
Safety Belt . . . . .	19
Service Engine Soon . . . . .	104
Traction Control . . . . .	106
Washer, Windshield . . . . .	74
Weight (GVWR) . . . . .	246
Wheel Alignment & Tire Balance . . . . .	252
Wheel Covers, How to Remove . . . . .	212
Wheel Nuts . . . . .	212
Wheel Nut Torque . . . . .	216, 268
Wheel Replacement . . . . .	252
Window Lock . . . . .	71
Windows, Power . . . . .	71
Windshield Washer Fluid . . . . .	74, 240, 271
Windshield Wiper Replacement . . . . .	245
Windshield Wipers . . . . .	73, 259, 267
Winter Driving . . . . .	180
If You're Stuck in Deep Snow . . . . .	183, 218

If You're Caught in a Blizzard . . . . .	182
Snow or Ice, Driving On . . . . .	181
Wrecker Towing . . . . .	199

# Service Station Information

