
WALK THE CUSTOMER THROUGH EACH OF THE FOLLOWING KEY DELIVERY FEATURES

- ☐ DRIVER SELECTABLE STEERING MODE-pages 35
 - Demonstrate and explain the different steering modes
- ☐ BLUETOOTH pages 22-25
- Show phone compatibility website: www.hyundaiusa.com/bluetooth
- Make a test call using Bluetooth with the customer's phone
- Demonstrate Voice Recognition (VR)
- ☐ BLUE LINK page 26 27
- Assist with creating MyHyundai.com account
- Assist with Blue Link enrollment Show Blue Link Users Manual & tear out Voice Commands/Quick Tip Card
- Encourage customers to press the Blue link button 😕 after enrollment to initiate Welcome Call

☐ TIRE PRESSURE MONITORING SYSTEM (TPMS) - page 34

Explain TPMS function to customer

- When illuminated, one or more tires are under-inflated.
- Blinks for approximately one minute then remains illuminated when there is a malfunction with the TPMS



- Demonstrate vehicle settings in instrument cluster
- Demonstrate navigation use, enter dealer address
- Show radio presets
- ☐ CLOCK pages 31
- Demonstrate how to set clock (including daylight savings setting for Navigation equipped vehicles)

MAINTENANCE

Scheduled Maintenance	Normal	Usage	Severe Usage*	
Engine Oil and Filter*	Replace	7,500 or 12 mos.	Replace	3,750 or 6 mos.
Fuel Additives	Add	At every Oil and Filter Service	Add	Same As Norma
Tire Rotation	Perform	7,500	Perform	7,500
Fuel System Cleaner Additive	Inspect Replace	7,500 30,000	Inspect Replace	Same As Norma More Frequently
Battery Condition	Inspect	7,500	Inspect	Same As Norma
Vacuum Hose	Inspect	7,500	Inspect	Same As Norma
Climate Control Air Filter	Replace	15,000	Replace	More Frequently
Brake Hoses and Lines	Inspect	15,000	Inspect	Same As Norma
Drive Shafts and Boots	Inspect	15,000	Inspect	7,500 or 6 mos.
Exhaust Pipe and Muffler	Inspect	15,000	Inspect	Same As Norma
Front Brake Disc/Pads, Calipers	Inspect	15,000	Inspect	More Frequently
Rear Brake Disc/Pads	Inspect	15,000	Inspect	More Frequently
Steering Gear Box, Linkage & Boots, Lower/Upper Arm Ball Joint	Inspect	15,000	Inspect	More Frequently
Suspension Mounting Bolts	Inspect	15,000	Inspect	Same As Norma
Propeller Shaft (AWD)	Inspect	15,000	Inspect	7,500 or 6 mos.
Brake Fluid	Inspect	30,000	Inspect	Same As Norma
Fuel Filter	Inspect	30,000	Inspect	Same As Norma
Fuel Lines, Fuel Hoses, and Connections	Inspect	30,000	Inspect	Same As Norma
Fuel Tank Air Filter	Inspect	30,000	Inspect	Same As Norma
Parking Brake	Inspect	30,000	Inspect	More Frequently
Vapor Hose and Fuel Filler Cap, Fuel Tank	Inspect	30,000	Inspect	Same As Norm
Transfer Case Oil (AWD)	Inspect	37,500	Replace	75,000
Rear Axle Oil (AWD)	Inspect	37,500	Replace	75,000
Valve Clearance	Inspect	60,000	Inspect	Same As Norma
Drive Belts	Inspect	1st: 60,000 or 72 mos. Add'l.: 15,000 or 24 mos.	Inspect	Same As Norm
Coolant	Replace	1st: 120,000 or 60 mos. Add'l.: 30,000 or 24 mos.	Replace	Same As Norma
Spark Plugs	Replace	105,000 or 120 mos.	Replace	More Frequently
Automatic Transaxle Fluid	No Check	, No Service required	Replace	60,000

*Check the engine oil regularly between recommended oil change. Hyundai recommends Quaker State oil.

*See Owner's Manual for details.

Looking for more detailed information? This Quick Reference Guide does not replace your vehicle's Owner's Manual. If you require additional information or are unsure of a specific issue, you should always refer to the vehicle's Owner's Manual or contact your authorized Hyundai dealer.

The information contained in this Quick Reference Guide was correct at the time of printing; however, specifications and equipment can change without notice. No warranty or guarantee is being extended in this Quick Reference Guide, and Hyundai reserves the right to change product specifications and equipment at any time without incurring obligations. Some vehicles are shown with optional equipment. Specifications apply to U.S. vehicles only. Please contact your Hyundai dealer for current vehicle specifications.

SANTA FE Quick Reference Guide

www.hyundai.com



XM® Radio: Blue Link:

Roadside Assistance: 1-800-243-7766 1-800-633-5151 1-800-967-2346 1-855-2BLUELINK (1-855-225-8354)

Table of contents

GETTING STARTED

Foldina kev


Front seat adjustment	03
Headrest adjustment	04
Rear seat folding	04
Remote keyless entry	02
Seat belt adjustment	04
FEATURES AND CONTROLS	
AC 115V plug	36
Active ECO System	36
Blind spot detection system (BSD)	37
Central door lock switch	06
Child-protector rear door lock	32
Climate control – Manual	16 -17
Climate control – Automatic	18 -19
Clock adjustments	31
Cruise control system	20
Driver's main controls	06
Driver selectable steering mode	35
Electronic Stability Control (ESC)	35
Fuel filler lid	05
Headlights and fog lights	07
Homelink wireless control system	11
Instrument cluster	12-15
Instrument panel illumination	13 & 15
Interior lights	10
Power tailgate	09
Rearview camera	37
Seat warmer and cooler	32
Steering wheel adjustments	05
Steering wheel functions	20 - 21
Sunroof	09
Tire Pressure Monitoring System (TF	PMS) 34
Transmission	33
Trip computer	13 & 15
Wiper and washer	08
MULTIMEDIA	
Audio	28
AUX, USB, and iPod® Port	28

IVIOLI IIVIEDIA	
Audio	28
AUX, USB, and iPod® Port	28
Blue Link Telematics system	26-27
Bluetooth operational tips	22-23
Bluetooth phone operation	24-25
Bluetooth phone pairing	24
Navigation	29-30

^{*}Some vehicles may not be equipped with all the listed features.

Frequently Asked Questions

- 1. Pair phone to your vehicle. Refer to pages 24.
- 2. Program HomeLink. Refer to page 11.
- 3. Getting started with Blue Link. Refer to page 26.

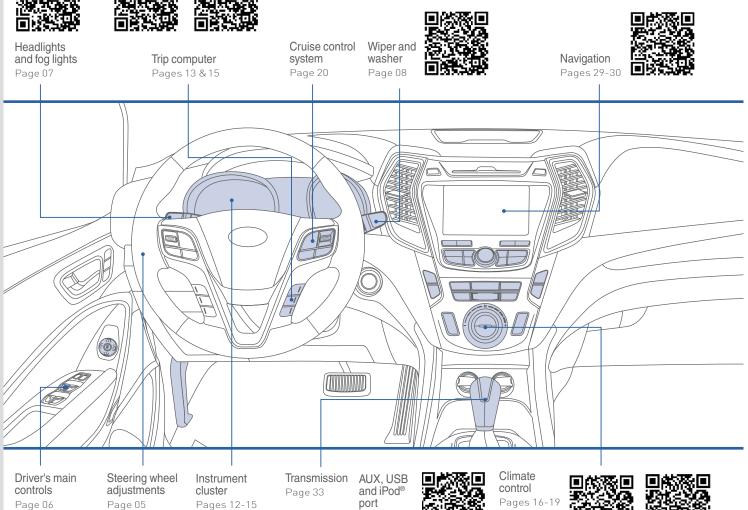

Use this Quick Reference Guide to learn about the features that will enhance your enjoyment of your Hyundai. More detailed information about these features is available in your Owner's Manual.

Type A

Type B




Page 28

To reduce the risk of serious injury to yourself and others, read and understand the important SAFETY INFORMATION in your Owner's Manual.



IGETTING STARTED

REMOTE KEYLESS ENTRY



Lock





Tailgate unlock (Press and Hold)

(Alarm

Mechanical key

Press and hold the release button **(A)** and remove the key.

NOTE

User selectable option see Owner's Manual for more detail.



Driver's door Lock / Unlock

Smart key must be within range.


Press:

Once - Unlock driver door

Twice - Unlock all doors

Third - Lock all doors

FOLDING KEY

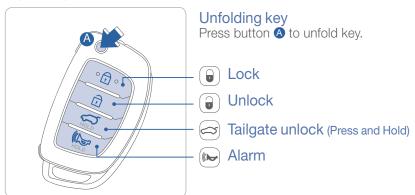

FRONT SEAT ADJUSTMENT (Manual)



Forward/backward







Seat cushion height (for driver's seat)





Seatback angle





Lumbar support





FRONT SEAT ADJUSTMENT (POWER)



Forward / backward





Seat cushion height (for driver's seat)





Seatback angle





Lumbar support







I FEATURES AND CONTROLS

IGETTING STARTED


REAR SEAT FOLDING

2nd row seat




From cargo area (2nd row seat)

3rd row seat





HEADREST ADJUSTMENT



To Raise Headrest:

Pull headrest up.

To Lower Headrest:


Press lock button while pressing down on headrest.

To Adjust Headrest Forward: Pull forward to 1 of 3 positions

To Adjust Backward:

Press lock button and push headrest backwards.

SEAT BELT ADJUSTMENT (Front seat)










Press button and push down to lower.

STEERING WHEEL ADJUSTMENTS








Tilt


NOTE: Do not adjust while driving.

- 1. Push the lever A down to release.
- 2. Set the angle **B** and distance **O**.
- 3. Pull the lever A up to lock.

FUEL FILLER LID







NOTE


After adding fuel, always reinstall the fuel cap onto the filler neck by rotating it clockwise until it clicks one time. Failure to do this may result in the Check Engine Light illuminating.

Check the engine oil regularly between recommended oil changes.





DRIVER'S MAIN CONTROLS



Outside rearview mirrors

Move the lever (A) to L (left) or R (right). Then adjust the mirror by using the directional switch ($^{\bullet}$).

Power window lock switch

Disables the power window switches on the rear passenger doors only.

Window auto down/up

Press past detent to fully open/close window.

CENTRAL DOOR LOCK SWITCH



HEADLIGHTS AND FOGLIGHTS




Headlight delay


Headlights may stay on for 15 seconds after exiting and locking vehicle. Press remote lock button twice to turn headlights off.

See Owner's Manual for more detail.

Turn signals and lane change signals Flashing headlights



High beam




Fog light





WIPER AND WASHER



MIST - Single wipe

OFF - Off

INT - Intermittent wipe

LO - Normal wiper speed


HI - Fast wiper speed



Intermittent wipe time adjustment

Fast wiper speed

Slow wiper speed



Front windshield wash with brief wipes



Rear wiper/washer control

H - Fast wiper speed

LO - Normal wiper speed

OFF - Off



Rear window wash with brief wipes

SUNROOF

Sliding the sunroof





To Open

Slide switch rearward.



To Close

Slide switch forward.


NOTE

To operate the sunshade, press open or close button.

open/close button

Tilting the sunroof





To Tilt

Press the switch up.

To Close

Slide the switch forward or pull the switch down.

POWER LIFTGATE



Options for opening liftgate

- Press exterior liftgate soft-touch switch.
- Press and hold key fob liftgate button.
- Press front seat overhead console button.

Options for closing liftgate

- Press button on edge of open liftgate.
- Press front seat overhead console button.

Smart Liftgate


Refer to Owner's Manual for more information on operating Smart Liftgate feature.





INTERIOR LIGHTS

Map lamp



Push the lens 1 to turn the map lamp on or off.

ON 2

Map lamp and room lamp will turn on.

OFF 3


The lights stay off.

DOOR 4


Map lamp and room lamp comes on when any door is opened.

ROOM 5


Map lamp and room lamp come on.




Room lamp




Press the switch to turn the light on or off.



HOMELINK WIRELESS CONTROL SYSTEM





Standard Programming

To train most devices, follow these instructions:

- 1. For first-time programming, press and hold the two outside buttons, HomeLink® Channel 1 and Channel 3 Buttons, until the indicator light begins to flash (after 20 seconds). Release both buttons. Do not hold the buttons for longer than 30 seconds.
- 2. Position the end of your hand-held transmitter 1-3 inches (2-8 cm) away from the HomeLink® buttons while keeping the indicator light in view.
- 3. Simultaneously press and hold both the HomeLink® and hand-held transmitter button. DO NOT release the buttons until step 4 has been completed.
- 4. While continuing to hold the buttons the red indicator Status LED will flash slowly and then rapidly after HomeLink® successfully trains to the frequency signal from the hand-held transmitter. Release both buttons.


For detail instructions, refer to your Owner's Manual or visit www.homelink.com.





Type A



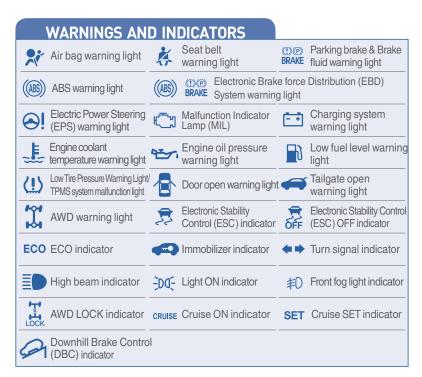


INSTRUMENT PANEL ILLUMINATION



Move the control knob left or right to adjust the brightness.

TRIP COMPUTER



Select "Trip Computer" mode by pressing the MODE button 1


To change the trip mode as follows, press the MOVE button ▼.











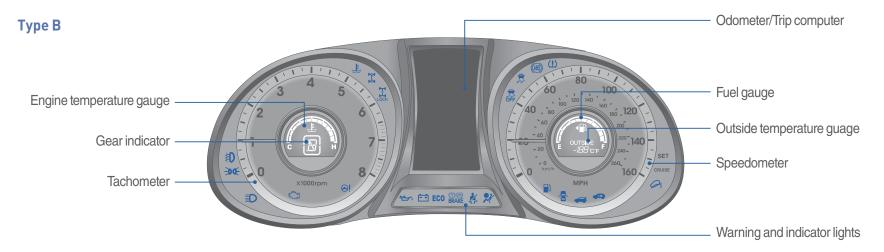


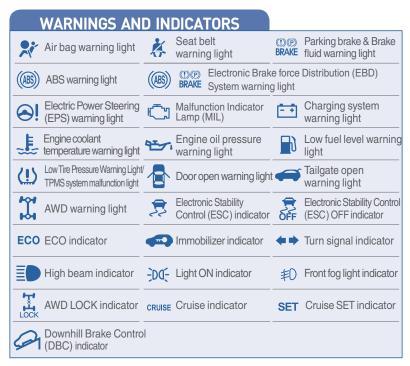

INSTRUMENT PANEL ILLUMINATION



TRIP COMPUTER

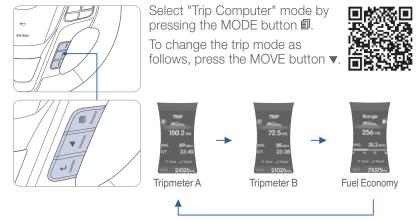







Manual Climate Control

Type A





- MAX A/C (Max air conditioning) button
- 2 A/C (Air conditioning) button
- Mode selection buttons
- 4 Fan speed control knob
- 6 Rear window defrost button
- 6 Front windshield defrost button
- Temperature control button

Manual Climate Control Type B









3rd row air climate control (for Type B)







8 Air intake control button

æ

- 93rd row climate control ON/OFF button
- 10 3rd row fan speed control knob
- 1 3rd row blower ON/OFF button
- 12 3rd row mode selection button
- 3rd row temperature control knob

DEFROSTING/DEFOGGING



1. Press the front windshield defrost button.




2. Set the temperature control towards warmer setting.




3. Set the fan speed to the highest setting.

To reduce tendency of the glass fogging and also to improve visibility, keep the interior surface of the windshield clean by wiping it with a clean cloth and glass cleaner.

AIR INTAKE CONTROL Type A



Type B



Outside (fresh) air position






Ш

Recirculated air position



MODE SELECTION



Changing the direction of the air flow as follows:



Face Level



Bi-Level



Floor Level



Floor/Defrost Level



Defrost Level

REAR WINDOW AND SIDE MIRRORS DEFROSTER



Press to activate/deactivate the rear window defroster.


3rd ROW CLIMATE CONTROL



Press to activate/deactivate the 3rd row climate control.



Automatic Climate Control Type A,B



- Air conditioning button
- 2 Driver's temperature control button
- 3 Mode selection button
- 4 Air intake control buttons

AUTOMATIC HEATING AND COOLING



1. Press the AUTO button.



2. Set the driver's temperature control to the desired setting.

The modes, fan speeds, air intake, and air-conditioning will be controlled automatically according to the temperature setting.

NOTE

To reduce tendency of the glass fogging and also improve visibility, keep the interior surface of the windshield clean by wiping it with a clean cloth and glass cleaner.

5 Front windshield defrost button

(Type B)

6 Fan speed control knob

(Type A)

- 7 AUTO (automatic control button)
- 8 OFF button
- 9 Rear window defrost button.

SYSTEM OFF MODE

Pressing the OFF button will place the system in the off mode.

- Front blower will turn off.
- Outside (fresh) air position selected.
- Vented air at last set temperature.

DEFROSTING/DEFOGGING



1. Press the front windshield defrost.



2. Set the temperature control towards warmer setting.



3. Set the fan speed to the highest setting.

AUTO DEFOGGING SYSTEM



The auto deffogging system automatically controls moisture of inside the windshield. To activate or deactivate the system, press the front defroster button 4 times within 2 seconds while pressing the AUTO button.

Automatic Climate Control

Type C





- 10 Dual temperature control selection button
- 11 Passenger's temperature control button
- Climate control information screen selection button

AIR INTAKE CONTROL Type B,C Type A





Recirculated air position





REAR WINDOW DEFROSTER



Press to activate/deactivate the rear defroster.

- 13 3rd row blower climate control ON/OFF button
- 14 3rd row fan speed control knob
- 15 3rd blower ON/OFF button
- 16 3rd row mode selection button
- 17 3rd row temperature control knob

DUAL BUTTON

Type A,B

Type C






Press the DUAL button to operate the driver and passenger side temperature individually.

MODE SELECTION



Changing the direction of the air flow as follows:



Level

Level

Defrost





STEERING WHEEL FUNCTIONS

Cruise control O SO SET Cruise indicator CRUISE Cruise indicator CRUISE Cruise indicator CRUISE Cruise set indicator SET Cruise set indicator

To Set a Cruising Speed

- 1. Press CRUISE button (A) and the CRUISE indicator will illuminate in the instrument cluster. Accelerate to desired cruising speed (above 25 mph).
- 2. Move the lever down (to SET-) **1** and remove your foot from the accelerator pedal.

To Accelerate or Decelerate

Move the lever up (to RES+) **©** to increase set cruising speed. Move the lever down (to SET-) **D** to decrease set cruising speed.


To Resume Previously Set Speed

Move the lever up (to RES+) •

To Cancel Cruising Speed

Press CANCEL button **B**, depress brake pedal, or press CRUISE button **A**.

Audio control



- 1 VOLUME Raises or lowers speaker volume.
- 2 SEEK/PRESET Press to change presets. Press and hold to seek stations.
- MODE Change the audio source. Hold to turn Audio power on/off.
- 4 MUTE
 Mute the sound. Turn off the microphone during a call.

Bluetooth control



1 VOLUME

Raises or lowers speaker volume.

- 2 MUTE Mute the sound.
- 3 TALK Activates voice recognition.
- 4 CALL Places and transfers calls.
- **5** END Ends calls or cancels functions.




BLUETOOTH OPERATIONAL TIPS

In the following situations you or the other party may have difficulty hearing each other:

- Keep the Bluetooth volume to a low level. High level volume may result in distortion and echo.
- 2. When driving on a rough road, high speeds and/or with the window open.
- 3. When the air conditioning vents are facing the microphone and/or when the air conditioning fan is at the max speed.

Steering wheel bluetooth control



To redial previously dialed number, press and hold 3.

1 VOLUME

Raises or lowers speaker volume.

2 MUTE

Mute the microphone during a call.

3 TALK

Activates voice recognition.

4 CALL

Places and transfers calls.

5 END

Ends calls or cancels functions.

To Answer a Call:

• Press C button on the steering wheel.

To Reject a Call:

• Press 🚗 button on the steering wheel.

To Adjust Ring Volume:

• Use the VOLUME buttons on the steering wheel.

To Transfer a Call to the Phone

(Private Call):

 Press and hold button on the steering wheel until the audio system transfers a call to the phone.

To Finish a Call:

• Press 🚗 button on the steering wheel.

VOICE RECOGNITION TIPS

Your vehicle is equipped with Voice Recognition technology which allows drivers to operate their phones without having to take their eyes off the road to minimize distractions.

Voice recognition performance may be affected if driving with windows and sun roof open; when the heating-cooling system is on; when passing in a tunnel or when driving on rugged and uneven roads.





BLUETOOTH PHONE PAIRING

Pairing tutorials, phone compatibility and Operational tips can be found through the Smart QR code using the QR reader application on your Smartphone.



BLUETOOTH PHONE OPERATION

Vehicle must be in park to complete the pairing process.

Phone setup (pairing phone) with Standard Radio



- 1. Press the SETUP A button.
- 2. Select "Phone" by turning and pressing the TUNE/ENTER **B** knob.
- 3. Select "Pair Phone" by turning and pressing the TUNE/ENTER **B** knob.
- Search for the device name as displayed on your mobile phone and connect.
- 5. Input the passkey displayed on the Audio screen.




6. Pairing completion is displayed.

Phone setup (Pairing phone) with Navigation

1. Press the call **c** button on the steering wheel remote controller or press the PHONE button.





- 2. Press Yes button on the screen.
- 3. Search for the car name and pair the device.
- 4. Input the passkey. (The initial passkey is 0000.)



5. Bluetooth® becomes connected.


NOTE

After pairing is completed, transfer of the contact list to the audio system will begin (if your phone is supported.)






BLUE LINK TELEMATIC SYSTEM

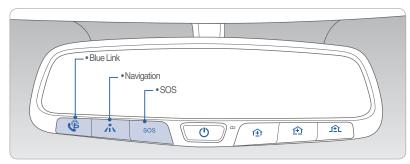

Press the $\widehat{\mathbf{P}}$ button for access to the voice-response menu of services. You have two options:

- You can say, "Main Menu" for a listing of main menu choices.
- You can directly select any of the listed menu items by saying its name.



- Press the / button for navigation-related services.
- Press the sos button for SOS Emergency Assistance.
- Refer to your Blue Link User's Manual for detailed information on system operation.
- For immediate assistance with subscription services, please call 1-855-2BLUELINK (1-855-225-8354).
- Please register your Blue Link at www.myhyundai.com.

Remote Door Unlock/Lock

Blue Link Mobile App



You can download the Blue Link mobile app to your compatible smart phone from the following sites:

- iPhone® Apple® App Store
- Android® Google Play

With this feature, you can lock or unlock your vehicle doors from virtually anywhere by using the Blue Link mobile phone app, by dialing the toll-free number, or by using the Blue Link owner's website.

• To use this feature, you must have a Blue Link Personal Identification Number (PIN). To create or change your PIN, log on to www.MyHyundai.com.

To Activate Remote Door Unlock/Lock


- By Blue Link Mobile App: Select DOOR UNLOCK or DOOR LOCK, as desired.
 - Enter your Blue Link PIN.
 - The command to lock or unlock your doors will be sent to your vehicle.
- By phone: Dial toll-free 1-855-2-BLUELINK (1-855-225-8354).
- By web site: Log on to www.MyHyundai.com, select Blue Link.
 - Select Remote Services, then Remote Door Unlock/Lock.
 - Input your Blue Link PIN. (If you need time to get to your vehicle, specify a time delay before your vehicle will be unlocked.)





AUDIO

Standard Radio



Press POWER button **B** to turn radio on.

- TUNING / LISTENING TO CHANNELS
- Press the Radio button.
 Turn the TUNE/ENTER knob to select the desired channel and press the knob.


NOTE A clear view of the southern sky helps ensure XM[®] radio reception.

 SETTING PRESET MEMORY BUTTONS (FM/AM/XM[®]) Press and hold any preset button (1-6) © until an audible beep is heard to store current channel.

- ADJUSTING THE SOUND CONTROL
- 1. Press the SETUP button.
- Select "Sound Settings" by turning and pressing the TUNE/ENTER knob.
 Select "Bass," "Middle," "Treble," "Fader," or "Balance" by turning and pressing the TUNE/ENTER knob.
- 4. Adjust the sound by turning and pressing the TUNE/ENTER knob.

Please refer to your Owner's Manual for more detailed information on how to use your audio system. Complimentary XM subscription ends three months following the vehicle date of sale. Please contact XM Radio at 1-800-XM-RADIO (1-800-967-2346) to renew your XM subscription.

AUX, USB, AND iPod® PORT




Use the jack to connect an external audio device and listen to it through the audio system speakers in your vehicle.



NAVIGATION

Audio mode

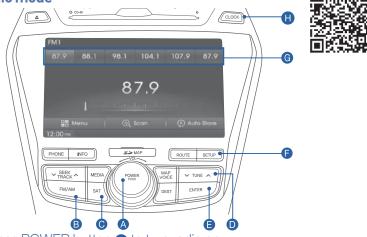

Press POWER button A to turn radio on.

- TUNING/LISTENING TO CHANNELS
- 1. Press FM/AM B or SAT 6 button of XM[®].
 2. Press the TUNE 0 button to desired channel.

NOTE A clear view of the southern sky helps ensure XM[®] radio reception.

• SETTING PRESET MEMORY BUTTONS (FM/AM/XM®)

Press and hold any preset button (1-6) @ on the screen until an audible beep is heard to store current channel.

- ADJUSTING THE SOUND CONTROL
- 1. Press the SETUP button and press the SOUND button to display the Sound Settings screen.
- 2. Touch on-screen arrows to adjust desired setting.
- SELECTING TRACK THROUGH SEARCH (CD MODE)

Press the TUNE **D** button to search tracks. Once the desired track name is displayed, press the ENTER button.






MULTIMEDIA FEATURES AND CONTROLS

NAVIGATION

Map position

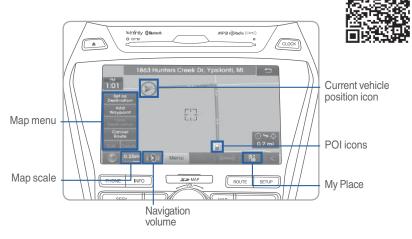

Destination menu





Quick Menu

Press the button on the left side of the map screen to display the Quick Menu.

- 2. Quick Menu Bar Menus added to the Quick Menu (possible to set up to 6 menus)
- 3. Edit Add/Delete Quick Menus
- 4. Current Quick Menus Shows list of current Quick Menus
- 5. Add/Remove Add or remove Quick Menus
- Quick Menu Categories List of categories that can be added to Quick Menus

CLOCK ADJUSTMENTS



With Standard Radio

- 1. Press the SETUP/CLOCK A button.
- 2. Select "Clock Settings" or "Time Format" by Turning and pressing the TUNE/ENTER ® knob.
- 3. Set the time in "Clock Settings" by turning and pressing the TUNE/ENTER **B** knob.
- 4. Select the time format in "Time Format," 12 hour format or 24 hour format, by turning and pressing TUNE/ENTER **B** knob.



With Navigation:

Press and hold CLOCK A.

GPS Time time received from the GPS will be displayed automatically.

Time Format: When the clock type is digital, it converts the time display between 12 hour and 24 hour format.






















SEAT WARMER AND COOLER

Front seat






Push the upper portion of the switch to warm or the lower portion to cool.



Rear seat








Push the switch to warm the rear seat. OFF → HIGH (□□□) → LOW (□□)

CHILD-PROTECTOR REAR DOOR LOCK






Lock () Insert a key into the hole and turn it to the lock () position.




Unlock


Insert a key into the hole and turn it counter clockwise to unlock position.

AUTOMATIC TRANSMISSION





- (): Depress the brake pedal and the lock release button when shifting.
- (): The lock release button must be pressed while moving the shift lever.
- (): The shift lever can be shifted without pressing the lock release button.



Sport mode


Move the shift lever from D (Drive) into the manual gate to select.

Move the shift lever forward (+) to upshift or rearward (-) to downshift.





TIRE PRESSURE MONITORING SYSTEM (TPMS)





Low Tire Pressure Indicator / TPMS Malfunction Indicator

Type A





Type B

LOW TIRE PRESSURE INDICATOR

Illuminates if one or more of your tires is significantly under-inflated.


TPMS MALFUNCTION INDICATOR

Blinks for approximately one minute, then remains illuminated when there is a malfunction with the TPMS system. Have the system checked by an authorized Hyundai dealer.

NOTE

When the low tire pressure indicator is illuminated, inflate tire to proper tire pressure as soon as possible. Tire pressure may vary in colder temperatures, causing the low tire pressure indicator to illuminate.

ELECTRONIC STABILITY CONTROL (ESC)




The ESC system is an electronic system designed to help the driver maintain vehicle control under adverse conditions.

Press A to turn ESC on/off.

NOTE

It is recommended to always have the ESC system ON.

DRIVER SELECTABLE STEERING MODE





The driver selectable steering mode changes steering effort per driver's preference.

Pushing the button once tells you what the current mode is on the center of the instrument cluster screen. Pressing the button again will scroll through the different modes.





ACTIVE ECO SYSTEM



Active ECO system

Active ECO system helps to improve fuel efficiency. When the Active ECO system is activated, the vehicle acceleration, gear shift points and air conditioning performance will be reduced to conserve the fuel consumption.

Press the Active ECO button to activate. The LED on the button and the ECO indicator in the instrument cluster will illuminate.

Active ECO on - For optimal fuel efficiency

Active ECO off - For optimal performance and drivability.

To improve your fuel efficiency:

- Drive smoothly and accelerate at a moderate rate.
- Avoid heavy accelerations.
- Maintain steady cruising speed.
- Adjust the vehicle speed to the traffic condition and avoid speed changes.
- Avoid unnecessary braking.
- Keep the tires inflated to the recommended tire pressure.
- Don't idle the engine longer than necessary.

AC 115V PLUG

36





- Dashboard button must be switched on to use cargo area AC115V plug. Engine should be running when AC 115V plug is in use.
- 2. Rotate safety plate A on outlet for use.

REARVIEW CAMERA






Type B and Navigation radio

The rearview camera will activate when the ignition switch is ON and the shift lever is in the R (Reverse) position.

BLIND SPOT DETECTION SYSTEM (BSD)



The BSD system sensor senses the rear side territory of the vehicle and provides information to the driver. Press the BSD switch. If vehicle speed exceeds 9.3mph the system will activate. Press the switch again to deactivate the system.

Blind spot detection (BSD)

Warning range is dependent on your vehicle speed. However, if your vehicle speed differences is 9.3mph above other vehicles, the warning is not active.

BLane change assist (LCA)

When the vehicle is approaching at high speed, the warning is not active.

Rear cross-traffic alert (RCTA)

When your vehicle moves (below 6mph) in Reverse, the sensor detects the approaching vehicles and the warning is active

Key Websites:

- Hyundai website www.hyundai.com
- Hyundai owner website www.myhyundai.com
- Bluetooth phone compatibility www.hyundaiusa.com/bluetooth
- Blue Link www.MyHyundai.com

SANTA FE CUSTOMER DELIVERY CHECK LIST

HYUNDAI OWNER DEALERSHIP NAME

SALES CONSULTANT DATE

VIN PREVIOUS VEHICLE

BEFORE DELIVERY

- ☐ CONFIRM "GOOD BATTERY" USING GR8 AND STAPLE TEST TICKET HERE
- ☐ SET TIRE PRESURE LF___RF ___RR___LR___
- □ VERIFY VEHICLE IS CLEAN, IN GOOD CONDITION, FREE OF CHIPS AND SCRATCHES · CLEAN WINDSHIELD AND BACK WINDOW
- ☐ ENSURE FLOORMATS ARE SNAPPED INTO PLACE

)
9

Emai

37

HYUNDAI SANTA FE