



2013 USER GUIDE

If you are the first registered retail owner of your vehicle, you may obtain a complimentary printed copy of the Owner's Manual, Navigation/Uconnect® Manuals or Warranty Booklet by calling 1-888-242-6342 (U.S.) or 1-800-387-1143 (Canada) or by contacting your dealer.

The driver's primary responsibility is the safe operation of the vehicle. Driving while distracted can result in loss of vehicle control, resulting in a collision and personal injury. FCA US LLC strongly recommends that the driver use extreme caution when using any device or feature that may take their attention off the road. Use of any electrical devices such as cell phones, computers, portable radios, vehicle navigation or other devices by the driver while the vehicle is moving is dangerous and could lead to a serious collision. Texting while driving is also dangerous and should never be done while the vehicle is moving. If you find yourself unable to devote your full attention to vehicle operation, pull off the road to a safe location and stop your vehicle. Some States or Provinces prohibit the use of cellular telephones or texting while driving. It is always the driver's responsibility to comply with all local laws.

IMPORTANT: This User Guide is intended to familiarize you with the important features of your vehicle. The DVD enclosed contains your Owner's Manual, Navigation/Uconnect® Manuals, Warranty Booklets, Tire Warranty and 24-Hour Towing Assistance (new vehicles purchased in the U.S.) or Roadside Assistance (new vehicles purchased in Canada) in electronic format. We hope you find it useful. Replacement DVD kits may be purchased by visiting www.techauthority.com. FIAT is a registered trademark of Fiat Group Marketing & Corporate Communication S.p.A., used under license by FCA US LLC.

Copyright 2016 FCA US LLC.

TABLE OF CONTENTS

INTRODUCTION/WELCOME

WELCOME FROM FIAT2
IMPORTANT VEHICLE INFORMATION4

CONTROLS AT A GLANCE

DRIVER COCKPIT6
INSTRUMENT CLUSTER.8

GETTING STARTED

ELECTRIC VEHICLE FEATURES10
ELECTRIC SYSTEM OPERATION13
CHARGING THE HIGH VOLTAGE BATTERY16
STARTING YOUR 500e18
KEY FOB19
THEFT ALARM19
POWER DOOR LOCKS20
SEAT BELT20
SUPPLEMENTAL RESTRAINT SYSTEM (SRS) - AIR BAGS21
CHILD RESTRAINTS22
FRONT SEATS.24
REAR SEATS.26
TILT STEERING26
HEATED SEATS27

OPERATING YOUR VEHICLE

EXTENDING YOUR DRIVING RANGE PER CHARGE28
TURN SIGNAL/LIGHTS/HIGH BEAM LEVER.30
WIPER/WASHER LEVER32
SPEED CONTROL33
POWER WINDOWS34
AUTOMATIC TEMPERATURE CONTROLS (ATC)35
REAR PARK ASSIST36
POWER SUNROOF.36
WIND BUFFETING37

ELECTRONICS

YOUR VEHICLE'S SOUND SYSTEM.38
AM/FM RADIO WITH CD PLAYER AND SiriusXM SATELLITE RADIO40
BLUE&ME™ HANDS-FREE OPERATION.42
iPod®/USB/MP3 CONTROL46
ELECTRONIC VEHICLE INFORMATION CENTER (EVIC)47
PROGRAMMABLE FEATURES47

TRIP BUTTON.48
POWER OUTLET49

UTILITY

TRAILER TOWING50
RECREATIONAL TOWING (BEHIND MOTORHOME, ETC.)50

WHAT TO DO IN EMERGENCIES

24-HOUR ROADSIDE ASSISTANCE.51
INSTRUMENT CLUSTER WARNING LIGHTS51
TIREFIT KIT54
JUMP-STARTING PROCEDURE — 12 VOLT BATTERY60
MANUAL PARK RELEASE62
TOWING A DISABLED VEHICLE63
ENHANCED ACCIDENT RESPONSE SYSTEM64
FREERING A STUCK VEHICLE.64
EVENT DATA RECORDER (EDR)65

MAINTAINING YOUR VEHICLE

OPENING THE HOOD66
UNDERHOOD COMPARTMENT67
FLUIDS AND CAPACITIES68
MAINTENANCE SCHEDULE69
FUSES.71
TIRE PRESSURES73
TIRE ROTATION RECOMMENDATIONS74
WHEEL AND WHEEL TRIM CARE75
EXTERIOR BULBS76

CUSTOMER ASSISTANCE

FIAT CUSTOMER CENTER.77
ASSISTANCE FOR THE HEARING IMPAIRED77
PUBLICATIONS ORDERING77
REPORTING SAFETY DEFECTS IN THE UNITED STATES.78

MOPAR ACCESSORIES

AUTHENTIC ACCESSORIES BY MOPAR®79
---	-----

FAQ (How To?)

FREQUENTLY ASKED QUESTIONS.80
-------------------------------------	-----

INDEX81
-----------------	-----

INTRODUCTION/WELCOME

WELCOME FROM FIAT

Congratulations on selecting your new FIAT 500e. Be assured that your 500e represents an elegant marriage of technology and Italian styling that is as good for the environment as is fun to drive!

Your new 500e has characteristics to enhance the driver's control under some driving conditions. These are to assist the driver and are never a substitute for attentive driving. They can never take the driver's place. Always drive carefully.

Your new vehicle has many features for the comfort and convenience of you and your passengers. Some of these should not be used when driving because they take your eyes from the road or your attention from driving. Never text while driving or take your eyes more than momentarily off the road.

This guide illustrates and describes the operation of features and equipment that are either standard or optional on this vehicle. This guide may also include a description of features and equipment that are no longer available or were not ordered on this vehicle. Please disregard any features and equipment described in this guide that are not available on this vehicle. FCA US LLC reserves the right to make changes in design and specifications and/or make additions to or improvements to its products without imposing any obligation upon itself to install them on products previously manufactured.

This User Guide has been prepared to help you quickly become acquainted with the important features of your vehicle. It contains most things you will need to operate and maintain the vehicle, including emergency information.

The DVD includes a computer application containing detailed owner's information which can be viewed on a personal computer or MAC computer. The multimedia DVD also includes videos which can be played on any standard DVD player. Additional DVD operational information is located on the back of the DVD sleeve.

INTRODUCTION/WELCOME

For complete owner information, refer to your Owner's Manual on the DVD in the owner's kit provided at the time of new vehicle purchase. For your convenience, the information contained on the DVD may also be printed and saved for future reference.

We are committed to protecting our environment and natural resources. By converting from paper to electronic delivery for the majority of the user information for your vehicle, together we greatly reduce the demand for tree-based products and lessen the stress on our environment.

USE OF AFTERMARKET PRODUCTS (ELECTRONICS)

The use of aftermarket devices including cell phones, MP3 players, GPS systems, or chargers may affect the performance of on-board wireless features. If you are experiencing difficulties with any of your wireless features, try disconnecting your aftermarket devices to see if the situation improves. If your symptoms persist, please see an authorized dealer.

CHRYSLER, DODGE, JEEP, RAM TRUCK, SRT, ATF+4, MOPAR and Uconnect are registered trademarks of FCA US LLC.

COPYRIGHT ©2016 FCA US LLC



INTRODUCTION/WELCOME

IMPORTANT VEHICLE INFORMATION


- Your 500e operates entirely on electricity stored in the high voltage battery. Unlike a conventional vehicle or Hybrid there is no internal combustion engine. Battery Electric Vehicles have unique operating characteristics that you should become familiar with to ensure you are getting the optimal performance from your vehicle.

High Voltage Battery

- Your vehicle is equipped with a Lithium-ion high voltage battery that is used to power the electric powertrain systems and the 12 Volt vehicle electrical system.
- The high voltage battery is located under the vehicle. The high voltage battery is maintenance free and designed to last for the life of the vehicle.

Lithium-ion batteries provide the following benefits:

- Lithium-ion batteries are much lighter than other types of rechargeable batteries of the same size.
- Lithium-ion batteries hold their charge; they only lose approximately 3% of their charge per month.
- Lithium-ion batteries have no memory, which means that you do not have to completely discharge them before recharging, as with some other batteries.
- Lithium-ion batteries can be recharged and discharged thousands of times.

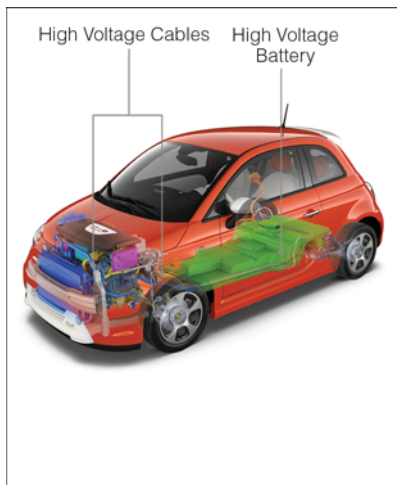

INTRODUCTION/WELCOME

High Voltage Battery Service Disconnect

- The high voltage battery service disconnect is located under the rear passenger seat lower cushion. If your vehicle requires service see your authorized studio.

Disposal of the High Voltage Battery

- Your vehicle's high voltage battery is designed to last the life of your vehicle. See your authorized studio for information on the disposal of the battery if it should require replacement.

General Information

The vehicle is also equipped with a Battery Management System that is designed to:

- Ensure safe operation
- Maximize driving range
- Maximize the life expectancy of the high voltage battery

NOTE:

The high voltage battery contains contactors that will open and close during vehicle shut down, start up or when plugging the vehicle in for charging. The contactors will produce a clicking noise that can be heard from within the vehicle. The clicking noise observed is the sound of these contactors as they open and close and is normal operation for your 500e.

WARNING!

Never try to remove the high voltage service disconnect. The high voltage service disconnect is used when your vehicle requires service by a trained technician at an authorized studio. Failure to follow this warning can cause severe burns or electrical shock that may result in serious injury or death.


CONTROLS AT A GLANCE



CONTROLS AT A GLANCE






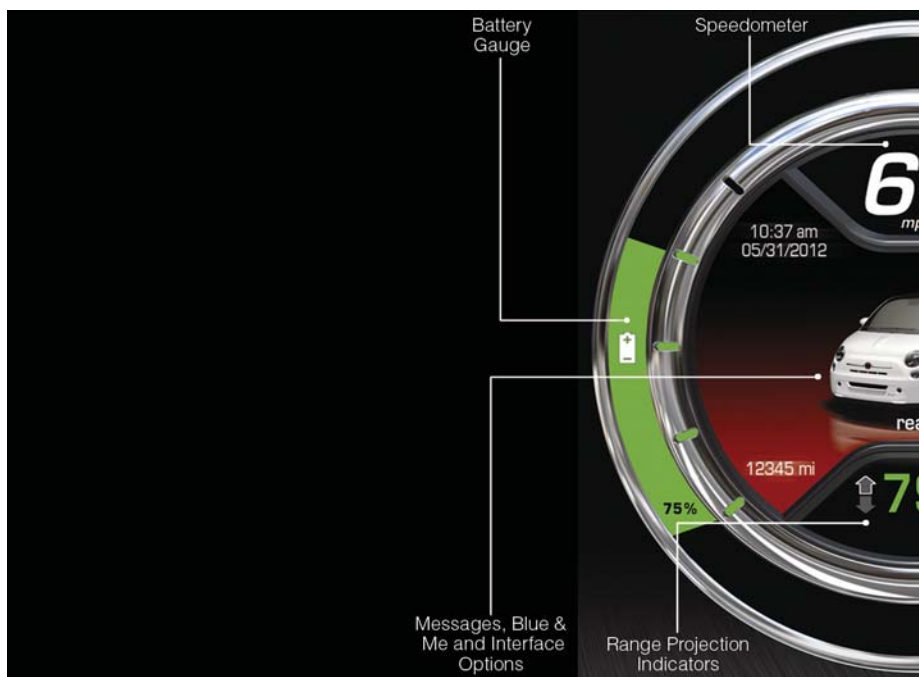




- A. Turn Signal Lever
(behind steering wheel) pg. 30
- B. Instrument Cluster
- C. Electronic Vehicle Information Center
(EVIC) Display pg. 47
- D. Wiper/Washer Lever
(behind steering wheel) pg. 32
- E. ESC Off pg. 32
- F. Instrument Panel Charge Indicator pg. 16
- G. Hazard Button
- H. Radio pg. 40
- I. Rear Defroster
- J. Passenger Power Window Switch pg. 34
- K. Single-Speed Transmission Buttons
- L. Drivers Power Window Switch pg. 34
- M. Automatic Temperature Controls pg. 34
- N. Speed Control Switches pg. 33
- O. BLUE&ME™ Hands-Free
Communication Switches pg. 42
- P. Hood Release Lever
- Q. Power Mirror Switches

CONTROLS AT A GLANCE




INSTRUMENT CLUSTER

Warning Lights






-  - Electric Vehicle System Warning Light
-  - Regenerative Brake System Warning Light
-  - 12 Volt Battery Charging System Light
-  - Anti-Lock Brake (ABS) Light
-  - Air Bag Warning Light
-  - Seat Belt Reminder Light
-  - Power Steering System Warning Light
-  - Service Propulsion System Warning Light
-  - Brake Warning Light
-  - Tire Pressure Monitoring System (TPMS) Light

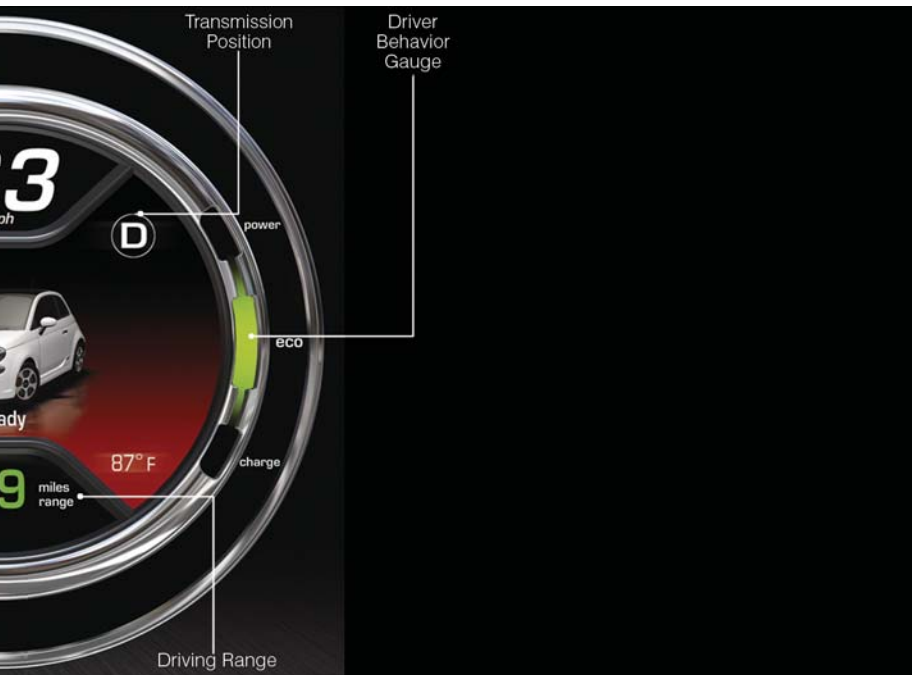
(See page 51 for more information.)

CONTROLS AT A GLANCE



Indicators

-  - Turn Signal Indicators
-  - High Beam Indicator
-  - Front Fog Light Indicator
-  - Park/Headlight ON Indicator
-  - Electronic Speed Control SET Indicator

-  - Door Ajar Indicator
- ESC OFF** - Electronic Stability Control (ESC) OFF Indicator
- ESC** - Electronic Stability Control (ESC) Activation/Malfunction Indicator

GETTING STARTED

ELECTRIC VEHICLE FEATURES

Auto Park

- The Auto Park features automatically places the transmission into PARK if there is any indication that the driver may leave the vehicle while the transmission is in D (DRIVE), N (NEUTRAL) or R (REVERSE).
- Auto Park is enabled under the following conditions:
 - Key On (12 Volt ON and High Voltage OFF) or READY mode (12 Volt ON and High Voltage ON).
 - Vehicle speed is below 2 mph (3 km/h).

NOTE:

Auto Park is disabled above 2 mph (3 km/h) and transmission range will be maintained.

- The instrument cluster will display an Auto shift to park message and chime once when Auto Park action occurs.

Mode of operation with key ON

- Auto Park will be engaged when the transmission is in DRIVE, NEUTRAL or REVERSE and the following conditions are detected:
 - Seat Belt is unlatched
 - Brake pedal is released
 - Driver's door is ajar

Mode of operation with key OFF

- Auto Park will be engaged when the transmission is in D (DRIVE), N (NEUTRAL) or R (REVERSE) and the vehicle speed is less than 2 mph (3 km/h).

Audible Pedestrian Warning System

- Your vehicle is equipped with an Audible Pedestrian Warning System. The Audible Pedestrian Warning System uses distinct sounds to alert pedestrians that your vehicle is approaching.
- The audible warning system uses an in-car sound synthesizer with a speaker located in the underhood compartment. The warning system is automatically activated when selecting D (DRIVE) or R (REVERSE).
- In D (DRIVE) range, the system will remain active until the vehicle reaches a speed of approximately 22 mph (35.5 km/h). At approximately 22 mph (35.5 km/h) the warning system is deactivated and will automatically be active when the vehicle returns to approximately 20 mph (32 km/h).

Smartphone Features

- With the “FIAT Access” smartphone app, you can monitor the state of charge of the high voltage battery or initiate charging from your phone. You can also turn on your car’s climate control system remotely. The smartphone app provides the following features:
 - Monitor battery charge level
 - Display available driving distance
 - Check charging status
 - Remotely activate vehicle climate control system
 - Unlock and lock doors
 - Assist with locating your vehicle
 - Locate charging stations
 - Send a point-of-interest to your vehicle
 - Schedule a charge
 - View energy consumed
 - Notifications for charging and preconditioning events


How do I get the “FIAT Access” smartphone App?

- Visit the 500e registration website:

<https://www.uconnectaccess.fiatusa.com/bevsubscribe/basicSubscription.jsp>

- Once in the registration website, you will need to enter your vehicle’s VIN and Connectivity ID. The connectivity ID is found in the vehicle’s instrument cluster. To locate the connectivity ID follow the steps below:

1. Press the menu button on the instrument cluster.

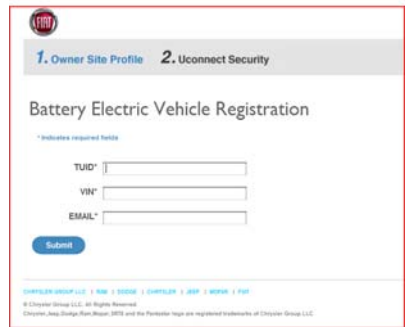

1. Owner Site Profile 2. Uconnect Security

Battery Electric Vehicle Registration

*Indicates required fields

TUID*

VIN*

EMAIL*

CHRYSLER GROUP LLC | RAM | JEEP | DODGE | PENTASTAR | 500e | PENTASTAR
© Chrysler Group LLC. All Rights Reserved.
Chrysler, Jeep Dodge Ram, Pentastar, 500e and the Pentastar logo are registered trademarks of Chrysler Group LLC.

GETTING STARTED

2. Choose "Settings" and scroll down to the "Connectivity ID".

3. Select "Connectivity ID".

- After obtaining the connectivity ID and VIN number return to the vehicle registration website and perform the following:

1. After entering the VIN (Vehicle Identification Number), Connectivity ID and your email address, click "submit".

2. You will now be asked to fill in your contact information and a user name and password.

3. Once finished with registration you will be directed to your 500e owner's site.

4. From the owner's site you will be able to download the 500e mobile application and learn how to use your connected features.

5. Use your owner's site username and password for logging into the mobile application.

NOTE:

Your smartphone must have a valid data connection to use the 500e mobile application.

Need help with registration?

- Please call the 500e Call Center Toll Free number below:

(855) 261-5364



ELECTRIC SYSTEM OPERATION

Level 1 Charging (120V — Requires NEMA 5–15 Outlet)

- Level 1 charging is done by using a conventional 120 Volt AC (Alternating Current) grounded receptacle along with the NEMA 5–15 Electric Vehicle Supply Equipment (EVSE) that comes standard with your vehicle. Refer to “Vehicle Charging Cord” for further information.

Level 2 Charging (240V — Requires A 40 Amp Circuit Breaker Or Greater)

- Level 2 charging is accomplished by using a 240V permanently mounted EVSE and is the preferred method for charging your vehicle.
- A Level 2 charging station can be installed at your residence.
- The Level 2 unit and installation service is available for purchase at your authorized studio.



Charge Times

Type of Charge	Approximate Time
Level 1 (120V/15A)	Approximately 23 hours to fully recharge * 3 hours will restore 10 miles of range *
Level 2 (240V/30A)	Approximately 4 hours to fully recharge * 30 minutes will restore 10 miles of range *

The following factors determine how long a battery recharge will take:

- The battery's current state of charge (percent depleted)
- What recharging device is being used (Level 1 or Level 2)
- Ambient temperatures

NOTE:

- Charging times are estimates based on a completely discharged high voltage battery pack.
- Charging times will vary based on the age, condition state of charge and temperature of the high voltage battery pack.

GETTING STARTED

EVSE Operation And Status Information



Indicator	Description
1 — AC Indicator LED	Green indicates READY RED Indicates a fault
2 — Fault Indicator LED	Green indicates READY RED indicates a fault
3 — Charge Level Indicator LED's	All ON indicates system ready and not charging LED's turning on and off in sequence indicates vehicle charging

- When the EVSE is first plugged in it will go through an initialization and self test. For the first three seconds after plugging in your EVSE all the LED's will remain off.
- After approximately three seconds the EVSE performs an internal self test and Ground Continuity Test. This process takes approximately six seconds.
- During the internal self test the unit turns on one Charge Level Indicator LED every 1.5 seconds until all the Charge Level Indicator LED's are illuminated.

AC LED	Fault Indicator LED	Charge Level Indicator LED's				Time
•	•	•	○	○	○	1.5 sec
•	•	•	•	○	○	3.0 sec
•	•	•	•	•	○	4.5 sec
•	•	•	•	•	•	6.0 sec

GETTING STARTED

- If the self test is successful the AC LED, the Fault Indicator LED and the four Charge Level LED's will turn solid green.
- The EVSE LED's will be used to indicate the vehicle's connection status if no faults are found during the self test.

AC LED	Fault Indicator LED	Charge Level Indicator LED's			
•	•	•	•	•	•

- After the EVSE is connected to the vehicle's charge inlet the EVSE will continue to illuminate all LED's green.
- Once the vehicle begins charging the EVSE Charge level LED's will illuminate in order from left to right, then shut off. This pattern will repeat as long as the EVSE remains connected to AC power and the battery is charging.
- The LED's are illuminated and turn off at the rate of one change per second.

AC LED	Fault Indicator LED	Charge Level Indicator LED's				Time
•	•	•	○	○	○	1.0 sec
•	•	•	•	○	○	2.0 sec
•	•	•	•	•	○	3.0 sec
•	•	•	•	•	•	4.0 sec

NOTE:

Refer to the Level I User Manual for any additional information on its use or operation.

CAUTION!

Do not bend or damage the Level I EVSE terminals as this could cause the EVSE to become inoperative and/or illuminate the fault LED.

GETTING STARTED

CHARGING THE HIGH VOLTAGE BATTERY

1. Put the vehicle in PARK.
2. Turn the ignition to the OFF position.
3. Remove the Level I EVSE from its storage bin by lifting the rear cargo cover.
4. Uncoil the entire length of the EVSE (charge cord).
5. Plug the EVSE into a standard 120V AC outlet that is properly grounded. It is recommended that the EVSE is connected to an AC outlet on a circuit which is not electrically loaded by other devices. Extension cords may not be used.

NOTE:

All of the EVSE LED's illuminate green.

6. Open the charge receptacle door.

NOTE:

The charge receptacle door is locked whenever the vehicle is locked. Unlock the doors to unlock the charge receptacle door for charging.

7. Plug the EVSE into the charge receptacle. Push the EVSE in firmly until it is completely engaged (if not completely engaged the vehicle may not charge).

NOTE:

- The vehicle will initiate the charging cycle automatically when all the conditions are satisfied.



GETTING STARTED

- The vehicle battery gauge will show the pattern for charging.
- When charging is complete, or the vehicle needs to be unplugged, remove the EVSE by pushing the button on the connector and pull firmly to remove it from the vehicle's charge receptacle.

8. Close the charge receptacle door.

NOTE:

- In the event of an error in the charging process the AC power to the vehicle will stop and a red indicator will illuminate on the EVSE.
- Keep the door for the charge receptacle closed when not in use.



Instrument Panel State Of Charge Indicator

- In addition to the instrument cluster the vehicle is also equipped with a State Of Charge indicator. The indicator is made up of five lights that are mounted to the center of the instrument panel.
- The State Of Charge indicator represents the current state of charge for the high voltage battery. The indicator lights quickly identify the battery state of charge while the vehicle is being charged. Each light represents an incremental 20% level of charge. Solid and blinking lights indicate charge status similar to a mobile device.

NOTE:

In the event of an error in the charging process the outer two lights will blink.



Number Of Indicator Lights Illuminated	Percent Of Battery Charge
1 Light	0 – 20%
2 Lights	21 – 40%
3 Lights	41 – 60%
4 Lights	61 – 80%
5 Lights	81 – 100%

GETTING STARTED

STARTING YOUR 500e

- Before starting your vehicle, adjust your seat, adjust both inside and outside mirrors, and fasten your seat belts.

WARNING!

- Never leave children alone in a vehicle, or with access to an unlocked vehicle.
 - Allowing children to be in a vehicle unattended is dangerous for a number of reasons. A child or others could be seriously or fatally injured. Children should be warned not to touch the parking brake, brake pedal or the shift lever.
 - Do not leave the key fob in or near the vehicle (or in a location accessible to children), and do not leave the ignition in the ACC or ON/RUN position. A child could operate power windows, other controls, or move the vehicle.
-
- Turn the key to the START position while your vehicle is in PARK. When the ignition key is turned to the START and then the RUN position, the “READY” indicator in the Electronic Vehicle Information Center (EVIC) will illuminate to indicate the 500e’s Electric Drive System has started.
 - When the “READY” indicator is illuminated your 500e is ready to be driven.
 - If the “READY” indicator fails to illuminate after you have followed the normal starting procedure contact your authorized studio.

NOTE:

You must press the brake pedal before shifting out of PARK.



KEY FOB

Locking and Unlocking the Doors and Liftgate

- Press the LOCK button once to lock all the doors and the liftgate.
- Press the UNLOCK button once to unlock the driver's door only and twice within five seconds to unlock all the doors and liftgate.



- All doors can be programmed to unlock on the first press of the UNLOCK button. Refer to Programmable Features in this guide.

Opening the Liftgate

- To open the liftgate, press the liftgate release handle located on the underside of the license plate bar and pull the liftgate open with one fluid motion.

WARNING!

Never leave children alone in a vehicle, or with access to an unlocked vehicle. Allowing children to be in a vehicle unattended is dangerous for a number of reasons. A child or others could be severely injured or killed. Children should be warned not to touch the parking brake, brake pedal, or the shift lever. Do not leave the Key Fob in the vehicle, or in a location accessible to children. A child could operate power windows, other controls, or move the vehicle.

THEFT ALARM

To Arm:

- Press the Key Fob LOCK button.

To Disarm:

- Press the Key Fob UNLOCK button or turn the ignition to the ON/RUN position.

GETTING STARTED

POWER DOOR LOCKS

- The vehicle's power door locks are activated by moving the inside door handles.

NOTE:

The vehicle's door must be closed to initiate this feature.

- Push or pull the door handle to lock or unlock the doors and liftgate when the doors are closed.


SEAT BELT

- Be sure everyone in your vehicle is in a seat and using a seat belt properly.
- Position the lap belt across your thighs, below your abdomen. To remove slack in the lap portion, pull up a bit on the shoulder belt. To loosen the lap belt if it is too tight, tilt the latch plate and pull on the lap belt. A snug belt reduces the risk of sliding under the belt in a collision.
- Position the shoulder belt on your chest so that it is comfortable and not resting on your neck. The retractor will withdraw any slack in the belt.
- A shoulder belt placed behind you will not protect you from injury during a collision. You are more likely to hit your head in a collision if you do not wear your shoulder belt. The lap and shoulder belt are meant to be used together.
- A belt that is too loose will not protect you properly. In a sudden stop you could move too far forward, increasing the possibility of injury. Wear your seat belt snugly.
- A frayed or torn belt could rip apart in a collision and leave you with no protection. Inspect the belt system periodically, checking for cuts, frays, or loose parts. Damaged parts must be replaced immediately. Do not disassemble or modify the system. Seat belt assemblies must be replaced after a collision if they have been damaged (bent retractor, torn webbing, etc.).
- The seat belts for both front seating positions are equipped with pretensioning devices that are designed to remove slack from the seat belt in the event of a collision.
- A deployed pretensioner or a deployed air bag must be replaced immediately.

WARNING!

In a collision, you and your passengers can suffer much greater injuries if you are not buckled up properly. You can strike the interior of your vehicle or other passengers, or you can be thrown out of the vehicle. Always be sure you and others in your vehicle are buckled up properly.

SUPPLEMENTAL RESTRAINT SYSTEM (SRS) - AIR BAGS

- This vehicle has Advanced Front Air Bags for both the driver and right front passenger as a supplement to the seat belt restraint system. The Advanced Front Air Bags will not deploy in every type of collision.
- Advanced Front Air Bags are designed to provide additional protection by supplementing the seat belts in certain frontal collisions depending on several factors, including the severity and type of collision. Advanced Front Air Bags are not expected to reduce the risk of injury in rear, side, or rollover collisions.
- This vehicle is equipped with Supplemental Side Air Bag Inflatable Curtains to protect the driver, front and rear passengers sitting next to a window.
- This vehicle is equipped with Supplemental Seat-Mounted Side Air Bags to provide enhanced protection to help protect an occupant during a side impact.
- This vehicle is equipped with Supplemental Driver Side Knee Air Bag to provide enhanced protection and work together with the Driver Advanced Front Air Bag during a frontal impact.
- If the Air Bag Warning Light  is not on during starting, stays on, or turns on while driving, have the vehicle serviced by an authorized studio immediately.
- Refer to the Owner's Manual on the DVD for further details regarding the Supplemental Restraint System (SRS).

WARNING!

- Relying on the air bags alone could lead to more severe injuries in a collision. The air bags work with your seat belt to restrain you properly. In some collisions, the air bags won't deploy at all. Always wear your seat belts even though you have air bags.
- Being too close to the steering wheel or instrument panel during Advanced Front Air Bag deployment could cause serious injury, including death. Air bags need room to inflate. Sit back, comfortably extending your arms to reach the steering wheel or instrument panel.
- Supplemental Side Air Bag Inflatable Curtains and Supplemental Seat-Mounted Side Air Bags need room to inflate. Do not lean against the door or window. Sit upright in the center of the seat.
- Being too close to the Supplemental Side Air Bag Inflatable Curtain and/or Seat-Mounted Side Air Bag during deployment could cause you to be severely injured or killed.
- Do not drive your vehicle after the air bags have deployed. If you are involved in another collision, the air bags will not be in place to protect you.
- After any collision, the vehicle should be taken to an authorized studio immediately.

GETTING STARTED


CHILD RESTRAINTS

- Children 12 years or younger should ride properly buckled up in a rear seat, if available. According to crash statistics, children are safer when properly restrained in the rear seats rather than in the front.
- Every state in the United States and all Canadian provinces require that small children ride in proper restraint systems. This is the law, and you can be prosecuted for ignoring it.

NOTE:

- For additional information, refer to www.seatcheck.org or call 1-866-SEAT-CHECK (1-866-732-8243).
- Canadian residents, should refer to Transport Canada's website for additional information: <http://www.tc.gc.ca/eng/roadsafety/safedrivers-childsafety-index-53.htm>


Installing The LATCH Compatible Child Restraint System

- Your vehicle's second row passenger seats are equipped with the child restraint anchorage system called LATCH, which stands for Lower Anchors and Tether for Children. LATCH child restraint anchorage systems are installed in both rear seating positions.
- **NEVER** install compatible child seats so that two seats share a common lower anchorage.
- Loosen the child seat adjusters on the lower straps and tether straps so that you can attach the hook or connector to the anchors.
- Attach the lower hooks or connectors over the top of the anchorage bars, pushing aside the seat cover material. The rear seat lower anchorages are round bars, located at the rear of the seat cushion where it meets the seat-back. The rear seat lower anchors can be readily identified by the symbol  located on the seatback directly above the anchorages and are just visible when you lean into the rear seat to install the child restraint.



GETTING STARTED

- The tether strap should be routed under the center of the head restraint and attached to the tether anchor on the rear of the seatback.
- Tighten all three straps as you push the child restraint rearward and downward into the seat.

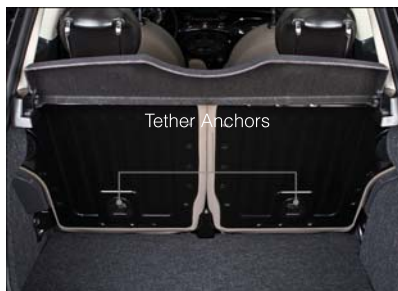

Installing the Child Restraint Using the Vehicle Seat Belts

- To install a child restraint, first pull enough of the seat belt webbing from the retractor to route it through the belt path of the child restraint, and then slide the latch plate into the buckle.
- Next, extract all the seat belt webbing out of the retractor and then allow the belt to retract into the retractor. Finally, pull on any excess webbing to tighten the lap portion around the child restraint. Any seat belt system will loosen with time, so check the belt occasionally, and pull it tight if necessary.
- Once you have completed securing the child restraint with the seat belt, secure the top tether strap. The tether strap should be routed under the center of the head restraint.

WARNING!

- In a collision, an unrestrained child, even a tiny baby, can become a projectile inside the vehicle. The force required to hold even an infant on your lap could become so great that you could not hold the child, no matter how strong you are. The child and others could be severely injured or killed. Any child riding in your vehicle should be in a proper restraint for the child's size.
- Improper installation of a child restraint to the LATCH anchorages can lead to failure of an infant or child restraint. The child could be severely injured or killed. Follow the manufacturer's directions exactly when installing an infant or child restraint.
- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchor positions directly behind the child seat to secure a child restraint top tether strap.
- Rearward-facing child seats must never be used in the front seat of a vehicle with a front passenger air bag. An air bag deployment could cause severe injury or death to infants in this position.
- This vehicle does not have a center seating position. Do not use the center lower LATCH anchorages to install a child seat in the center of the back seat.

GETTING STARTED

FRONT SEATS

Manual Seat Adjustment

Forward/Rearward

- Lift up on the adjusting handle, located at the front of the seat near the floor, and release at the desired position. Then, using body pressure, move forward and backward on the seat to be sure that the seat adjusters have latched.



Manual Seat
Adjusting Handle

Recliner

- To recline the seatback, lift up the recline lever, located on the inboard side of the seat, lean back until the desired position has been reached, and release the lever.



Recline Lever


Seat Height

- The driver's seat height can be raised or lowered by using a lever, located on the out-board side of the seat. Pump the lever upward to raise the seat height, or pump the lever downward to lower the seat height.



EZ Entry Seats

- Pull forward on the lever, located on the side of the seatback, to dump the seatback forward and slide the seat forward. This allows for easier access to the rear seat.
- The driver seat has a memory feature. After using the EZ Entry function, the seat back and adjuster will re-lock into the original position at which the seat was previously adjusted to.

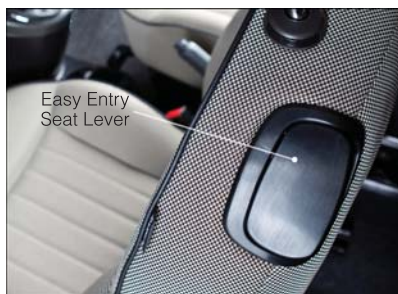

WARNING!

- Adjusting a seat while the vehicle is moving is dangerous. The sudden movement of the seat could cause you to lose control. The seat belt might not be properly adjusted, and you could be severely injured or killed. Only adjust a seat while the vehicle is parked.
- Actuating the recliner handle will allow the seatback to swing (dump) forward on manual recliner seats. Do not stand or lean in front of the seat while actuating the handle. The seatback may swing forward and hit you, causing injury. This dump feature allows access to the storage bin behind the seat. To avoid injury, place your hand on the seatback and actuate the handle, then position the seatback in the desired position.
- Do not ride with the seatback reclined so that the seat belt is no longer resting against your chest. In a collision, you could slide under the seat belt and be severely injured or killed. Use the recliner only when the vehicle is parked.

GETTING STARTED

REAR SEATS

Folding Rear Seatback

- To fold each rear seatback, push down on the button located on the upper out-board side of the seat and fold the seatback flat.

NOTE:

Be sure that the front seats are fully upright and positioned forward. This will allow the rear seatback to fold down easily.



TILT STEERING

- The tilt lever is located on the steering column, below the turn signal lever.
- Push down on the lever to unlock the steering column.
- With one hand firmly on the steering wheel, move the steering column up or down as desired.
- Pull upward on the lever to lock the column firmly in place.



WARNING!

Do not adjust the steering column while driving. Adjusting the steering column while driving or driving with the steering column unlocked could cause the driver to lose control of the vehicle. Be sure the steering column is locked before driving your vehicle. Failure to follow this warning may result in severe injury or death.

HEATED SEATS

Front Heated Seats

- The controls for the front heated seats are located on the center instrument panel area.
- Press the switch once to turn on the heated seat. Press the switch a second time to turn off the heated seat.



WARNING!

- Persons who are unable to feel pain to the skin because of advanced age, chronic illness, diabetes, spinal cord injury, medication, alcohol use, exhaustion or other physical conditions must exercise care when using the seat heater. It may cause burns even at low temperatures, especially if used for long periods of time.
- Do not place anything on the seat that insulates against heat, such as a blanket or cushion. This may cause the seat heater to overheat. Sitting in a seat that has been overheated could cause serious burns due to the increased surface temperature of the seat.

OPERATING YOUR VEHICLE

EXTENDING YOUR DRIVING RANGE PER CHARGE

- A little knowledge will go a long way to extend your driving range on the 500e. First and foremost understand that the drive system and cabin temperature management features use the most energy from the high voltage battery. Reducing energy draw from these features are the easiest and most effective way to extend driving range.
- Just like a conventional vehicle, 500e likes to keeps things smooth and steady for most efficient operation. When driving, avoid aggressive driving styles and high speeds for extended times. When practical, choose surface streets over the highway, work to maintain a steady speed to extend range.
- The 500e uses high voltage components to heat and cool the cabin, so a little awareness can go a long way to extend range. When using automatic climate control, consider setting temperatures a few degrees higher or lower during hot and cold days. If your 500e has been soaking in hot or cold temperatures for an extended period, it is recommended that the car be preconditioned via the mobile application while still plugged into a charging source. This will allow 500e to use external power to establish a comfortable cabin temperature before the drive, and allow the battery to maintain the temperature using significantly less energy.

Additional tips:

- keep tires properly inflated
- avoid carrying nonessential cargo
- be mindful of adding external accessories that may increase aerodynamic drag
- perform all scheduled maintenance at recommended intervals

OPERATING YOUR VEHICLE

Driver Behavior Gauge

- To help the driver extend the driving range of the high voltage battery your vehicle is equipped with a Driver Behavior Gauge. The Driver Behavior Gauge is located on the right side of the instrument cluster and displays three driving ranges:

Power

- The Driver Behavior Gauge will move into the Power range when under acceleration.

ECO

- The Driver Behavior Gauge will move into the ECO range when you are maximizing the driving range of the high voltage battery.

Charge


- The Driver Behavior Gauge will move into the Charge range when battery re-generation is active (either coasting or braking).



- | |
|------------|
| 1 — Power |
| 2 — ECO |
| 3 — Charge |

OPERATING YOUR VEHICLE

TURN SIGNAL/LIGHTS/HIGH BEAM LEVER

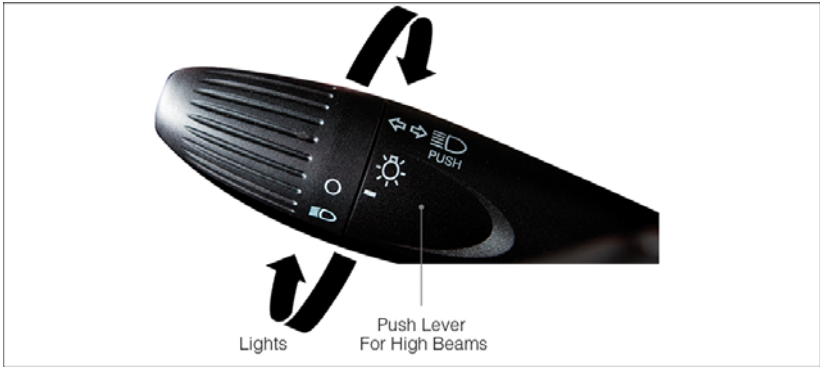

Turn Signal/Lane Change Assist

- Tap the lever up or down once and the turn signal (right or left) will flash briefly to indicate a lane change and automatically turn off.

Headlights/Parking Lights

- The ignition switch must be in the ON/RUN position for the headlights to operate.
- Rotate the end of the lever to the first detent for parking lights and headlight operation.

High Beams

- Push the lever forward to activate the high beams.
- A high beam symbol will illuminate in the cluster to indicate the high beams are on.

NOTE:

For safe driving, turn off the high beams when oncoming traffic is present to prevent headlight glare and as a courtesy to other motorists.

Flash To Pass

- Pull the lever toward you to activate the high beams. The high beams will remain on until the lever is released.

OPERATING YOUR VEHICLE

Headlight Delay (Follow Me Home)

- Within two minutes of the ignition switch being turned to the OFF/LOCK position or the ignition key being removed from the ignition, pull the turn signal lever toward the steering wheel.
- Each movement of the lever toward the steering wheel will increase the illumination period by 30 seconds, up to a maximum of 210 seconds.
- To deactivate, pull the multifunction lever toward the steering wheel and hold it for more than two seconds.

NOTE:

Activation of Follow Me Home is only enabled once per key cycle and steps must be repeated each time you want to activate it.


Fog Lights

- Push the fog light button, located on the climate controls, once to turn on the fog lights.
- Push the button a second time to turn the fog lights off.



OPERATING YOUR VEHICLE

WIPER/WASHER LEVER

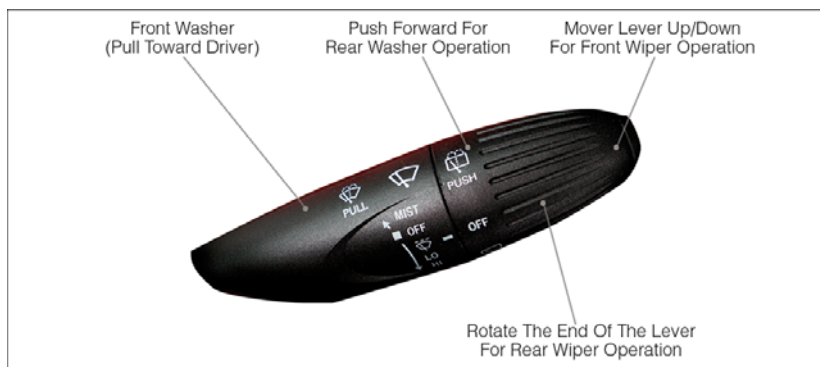

Front Wipers

Intermittent, Low and High Operation

- Move the lever downward to the first detent for intermittent wiper operation, the second detent for low wiper operation and to the third detent for high wiper operation.

Mist

- Move the lever upward and release when a single wipe is desired.

NOTE:

The mist feature does not activate the washer pump; no washer fluid will be sprayed on the windshield. The wash function must be activated to spray the windshield with washer fluid.

Washer Operation

- Pull the lever toward you and hold for as long as spray is desired.

Rear Wiper

Rear Wiper Operation

- Rotate the end of the lever to activate the rear wiper.

Rear Washer Operation

- Push the lever forward and hold for as long as spray is desired.

SPEED CONTROL

- The Speed Control switches are located on the steering wheel.

Cruise ON/OFF

- Push the ON/OFF button to activate the Speed Control.
- CRUISE READY will appear on the instrument cluster to indicate the Speed Control is on.
- Push the ON/OFF button a second time to turn the system off.

Set

- With the Speed Control on, push and release the SET – button to set a desired speed.

NOTE:


The set speed will be displayed on the cluster for approximately 2–3 seconds.

Accel/Decel

- Once a speed is set, pushing the RES + button once or the SET – button once will increase or decrease the set speed approximately 1.5 mph (2.4 km/h).
- Press and hold RES + button to accelerate or press and hold the SET – button to decelerate; release the button to save the new set speed.

Resume

- To resume a previously selected set speed in memory, push the RES + button and release.

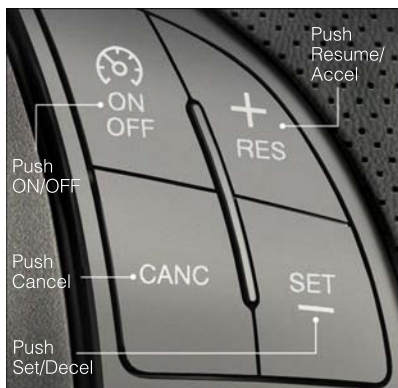

OPERATING YOUR VEHICLE

Cancel

- Push the CANCEL button, or apply the brakes to cancel the set speed and maintain the set speed memory.
- Push the ON/OFF button to turn the system off and erase the set speed memory.

WARNING!

- Leaving the Electronic Speed Control system on when not in use is dangerous. You could accidentally set the system or cause it to go faster than you want. You could lose control and have a collision. Always leave the Electronic Speed Control system off when you are not using it.
- Electronic Speed Control can be dangerous where the system cannot maintain a constant speed. Your vehicle could go too fast for the conditions, and you could lose control. A collision could be the result. Do not use Electronic Speed Control in heavy traffic or on roads that are winding, icy, snow-covered or slippery.

POWER WINDOWS

- The controls for the power windows are located on either side of the transmission push buttons.
- Power windows can be operated with the ignition in the ON/RUN position.
- Both windows have an Auto Down feature. Push the switch down past the detent and release to fully lower the window.
- Pull the switch upward to close the window.



OPERATING YOUR VEHICLE

AUTOMATIC TEMPERATURE CONTROLS (ATC)



Automatic Operation

- Push the AUTO button.
- Select the desired temperature by pushing the temperature control buttons.
- The system will maintain the set temperature automatically.

Air Recirculation

- Use recirculation for maximum A/C operation.
- For window defogging, turn the air recirculation button off.

Heated Mirrors

- The mirrors are heated to melt frost or ice. This feature is activated whenever you turn on the rear window defroster.

OPERATING YOUR VEHICLE

REAR PARK ASSIST

- If an object is detected behind the rear bumper while the vehicle is in REVERSE, a chime will sound. The chime rate will change depending on the distance of the object, getting faster as the object gets closer to the bumper. The chime will become continuous when the distance between the vehicle and the obstacle is less than 12 inches (30 cm).

POWER SUNROOF

- The power sunroof roof switch is located in the overhead console.

To Open

- Press and hold the power sunroof switch rearward for approximately two seconds and the sunroof will stop at the vented position. Press the switch a second time and hold for approximately one second and release, the sunroof will open fully, then stop automatically. This is called "Express Open". During Express Open operation, any movement of the sunroof switch will stop the sunroof.

To Close

- With the sunroof in the full open position, pull the power sunroof button and hold it for approximately one second, the sunroof will return to the completely close position. During Express Close operation, any movement of the sunroof switch will stop the sunroof.



Pinch Protection Feature

- This feature will detect an obstruction in the opening of the sunroof during Express Close operation. If an obstruction in the path of the sunroof is detected, the sunroof will automatically retract. Remove the obstruction if this occurs. Next, press the switch forward and release to Express Close.

NOTE:

If three consecutive sunroof close attempts result in Pinch Protect reversals, the fourth close attempt will be a Manual Close movement with Pinch Protect disabled.

OPERATING YOUR VEHICLE

Sun Shade

- For vehicles equipped with either a power sunroof or a fixed glass roof, there is a sun shade that can be open or closed. To open the sun shade press the tab and move the shade to a full open position.

WARNING!

- Do not let children play with the sunroof, or leave children unattended in the vehicle, and do not leave the key in or near the vehicle (or in a location accessible to children). Occupants, particularly unattended children, can become entrapped by the power sunroof while operating the power sunroof switch. Such entrapment may result in serious injury or death.
- In a collision, there is a greater risk of being thrown from a vehicle with an open sunroof. You could also be seriously injured or killed. Always fasten your seat belt properly and make sure all passengers are properly secured.
- Do not allow small children to operate the sunroof. Never allow your fingers, other body parts, or any object to project through the sunroof opening. Injury may result.

WIND BUFFETING

- Wind buffeting can be described as a helicopter-type percussion sound. If buffeting occurs with the windows down, or top down (convertible models), adjust one or both windows up or down slightly.

ELECTRONICS


YOUR VEHICLE'S SOUND SYSTEM



Steering Wheel
Audio Controls
(back of
steering wheel)

BLUE&ME™
Handsfree
Communications



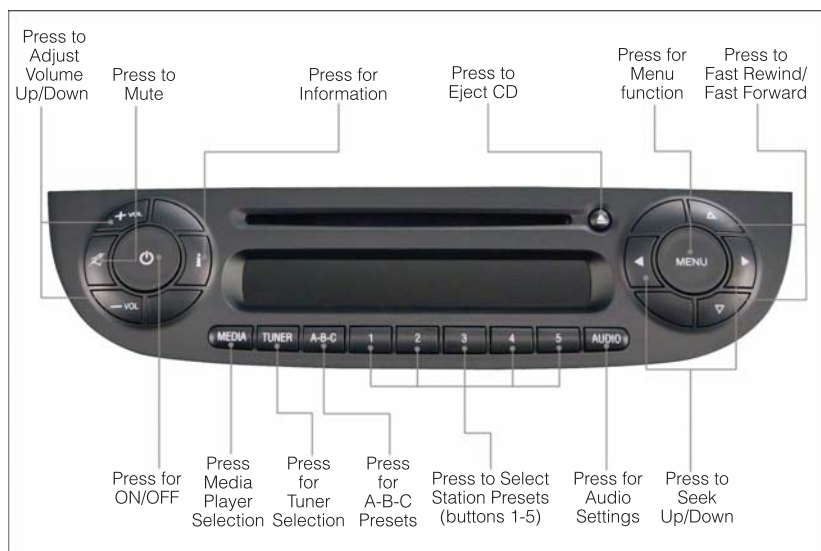

Seek Up/Down Buttons

- Press the right or left arrows to seek through radio stations in AM or FM bands. Seek through tracks in CD.
- Hold either button to bypass stations without stopping.

Tune Up/Down Buttons

- Press the up or down arrows to manually search through radio stations in AM or FM bands. Fast Forward or Fast Rewind through a CD track.

Audio Settings

- Press the AUDIO button, then press the up and down arrows to select BASS, TREBLE, BALANCE and FADE. To adjust a setting, use the right and left arrows.

TUNER

- Press the Tuner button to select between AM, FM, SAT (SiriusXM Satellite Radio) modes.

Info

- Press the Info button to view Song, Artist, Album, Genre, Playlist, Folder information (if available) in CD, Media Player and SiriusXM Satellite Radio (if so equipped). Also use the Info button to toggle RDS information in FM.

MENU

- Press the MENU button and one of the following options will appear on the Radio display. Use the up and down arrows to scroll through the options; use the left and right arrows to change a selection setting.
 - Speech Volume
 - Aux Audio Offset
 - Radio Off
 - Sat ID
 - SiriusXM Telephone Number
 - System Reset
 - Speed Volume
 - On Volume Limit

Clock Setting

- The time is set using the Electronic Vehicle Information Center (EVIC) Display.
- With the Date and Time shown in the EVIC display, press the SET ESC button to enter the menu mode.
- Press the plus or minus buttons until "Set Time" is displayed and press the SET ESC button again.
- Press the SET ESC button; "hours" will flash on the display.
- Press the plus or minus buttons to adjust the hours.
- When setting the hour is complete, briefly press the SET ESC button and "minutes" will flash in the display. Press the plus or minus buttons to adjust the minutes.
- When setting the time is complete, press and hold the SET ESC button.

NOTE:

The charging schedule is based on this date and time.

Station Presets

- To store a tuned station, find the station to store by either pressing the right and left arrow (Seek) buttons or by pressing up or down arrow (Manual Tune) buttons.
- Once the station is found, press and hold one of the PRESET buttons, until you hear a confirmation beep (Preset Saved will be shown in the radio display). A total of 15 FM, 10 AM and 15 SiriusXM Satellite Radio stations can be preset by pressing the A-B-C button.

A-B-C Button

- Press the A-B button to choose between the presets stored in the AM mode, A-B-C to choose between the presets stored in the FM and SAT modes. The mode (AM, FM, SAT), station preset (A, B, C) and preset button number (P 1-5) will be displayed in the middle of the radio display.

ELECTRONICS

BLUE&ME™ HANDS-FREE OPERATION

- FIAT's Windows Mobile™ based BLUE&ME™ Hands-Free Communication is a personal telematics system that incorporates communication and entertainment applications that are specifically designed for use in your car.
- The BLUE&ME™ Hands-Free Communication package installed in your car is equipped with integral hands-free functionality, message reader, and media player. BLUE&ME™ is designed to support the future installation of additional services.
- The BLUE&ME™ Hands-Free Communication package features integrated voice recognition, steering wheel controls and a multifunction electronic display that allows you to use your Bluetooth® enabled wireless technology enabled mobile phone without having to take your eyes off the road. You can even keep your phone in a pocket or a bag. You are not required to train the voice recognition system to recognize your voice. The system is "speaker independent" and performs equally well for different users.

WARNING!

Driving while distracted can result in loss of vehicle control, accident and injury. It is strongly recommended that you use extreme caution when using any device or feature that may take your focus off the road or your hands off the steering wheel. Your primary responsibility is the safe operation of your vehicle.

Front Steering Wheel Buttons

- The operations of the front BLUE&ME™ Steering Wheel buttons, located on the front left of the steering wheel, are as follows:



Button	Short press function (less than 1 second)	Long press function (more than 1 second)
PHONE/MENU	<p>Launch BLUE&ME™ Main Menu</p> <p>Dial the number displayed on the display that was accessed haptically from the phonebook or the recent calls list</p> <p>Accept an incoming phone call</p> <p>Switch between two ongoing phone conversations (call waiting)</p> <p>Dial the name/number on the display that was selected/entered by voice recognition</p>	–
MUTE/ESC	<p>Cancel voice recognition</p> <p>Cancel a voice announcement</p> <p>Interrupt message reading</p> <p>Exit BLUE&ME™ Main Menu</p> <p>Exit the sub-menu and return to the previous menu option</p> <p>Exit current menu option without storing settings</p> <p>Turn the microphone on/off during a phone conversation</p> <p>Mute the ring tone of an incoming call</p> <p>Media player Pause on/off</p>	–
VOICE RECOGNITION (VR)	<p>Activate voice recognition</p> <p>Interrupt voice announcement to provide a new voice command</p>	Repeat the last utterance in a voice interaction
PHONE HANG UP	<p>Reject an incoming call and end a phone call in progress</p> <p>End an active call and switch to a call waiting (on hold)</p>	–
PRESET UP/OK (center button on left side back of steering wheel)	<p>Confirm manually selected menu option</p> <p>Switch phone conversation from the hands-free phone to your mobile phone and vice versa</p> <p>Select displayed message</p>	–
SCAN UP/SCAN DOWN (left side back of steering wheel)	<p>Scroll BLUE&ME™ menu items</p> <p>Scroll through media player tracks</p> <p>Scroll inbox messages</p>	–

ELECTRONICS

Steering Wheel Audio Controls

- The right hand control on the rear of the steering wheel is a rocker type switch with a pushbutton in the center. Press the switch up for Volume +. Press the switch down for Volume -. The button in the center is the SRC button used to change audio sources (e.g. AM, FM, CD, Media Player).
- The left hand control on the rear of the steering wheel is also a rocker type switch with a pushbutton in the center. Press the top of the switch to Scan Up. Press the bottom of the switch to Scan Down. The button in the center is the PRESET UP/OK button.

BLUE&ME™ Hands-Free Communication

- To use the hands-free feature, you need a Bluetooth® wireless technology enabled mobile phone. This hands-free feature gives you the possibility of interacting vocally with your mobile phone while driving, even if your mobile device does not feature this capability. You can also interact with your mobile phone manually and visually using the steering wheel controls and the instrument panel EVIC display.
- To get started with BLUE&ME™ hands-free feature with voice recognition, you have to simply pair your Bluetooth® wireless technology enabled mobile phone with the system.

Pair Your Mobile Phone

- Press VR steering wheel button and "Settings" then, at the end of the BLUE&ME™ message say "Pairing".
- The system will show the phone pairing PIN number on the EVIC display. For the next two steps, consult your mobile phone owner's manual about Bluetooth® pairing procedures for your phone.
- On your mobile phone, search for devices equipped with Bluetooth® wireless technology (the setting on your mobile phone might be called Discover or New Device). In this list you will find BLUE&ME™ (name identifying the BLUE&ME™ system on your car): select it.
- When prompted by the mobile phone, enter the PIN number shown on the instrument panel display using your mobile phone keypad. If pairing is successful, the system will say "Connecting" and at the end the display will show as confirmation message, the ID of the paired mobile phone.
- It is essential to wait until you see this confirmation message on the display. Pressing PHONE/MENU button on the steering wheel or MUTE/ESC button before the message is displayed may cancel the pairing process. If the pairing process fails, an error message will be displayed: in this event repeat the pairing procedure.
- At first pairing, BLUE&ME™ will say "Welcome" immediately after connecting. This message will no longer be heard when your phone automatically connects to the BLUE&ME™ system on future ignition cycles.
- BLUE&ME™ will ask if you would like to copy your paired phone phonebook to BLUE&ME™. It is recommended to copy it. To start copying the phonebook say "Yes", otherwise say "No".

- For certain mobile phones the phonebook is not copied automatically, in this case you must transfer the phonebook contacts using your mobile phone keypad. If BLUE&ME™ asks you to do this, then perform this procedure following the instructions specific to your mobile phone and press PHONE/MENU button on the steering wheel when you have finished.

Making a Phone Call

- Assume that "John Smith" is one of the contacts stored in your phonebook.
- To call John Smith, proceed as follows:
- Press the VR steering wheel button and pronounce "Call John Smith".
- If the name is recognized, the system will display the recognized contact's information on the display screen.
- If there is just one phone number for John Smith in your phonebook, the system will ask if you would like to call John Smith. To start the call say "Yes", otherwise say "No".
- If John Smith has several phone numbers, the system will ask which phone number you would like to call (e.g.: "Call John Smith (at) Work or (at) Home?"). Answer with the type of required phone number (e.g.: "(at) Home").
- If John Smith has several phone numbers but the "location" (i.e.: the type of phone number like work, home, etc.) is missing, the system will display the selected contact and a list of related phone numbers on the instrument cluster display. The hands-free phone system will ask if you would like to call the phone number displayed. To respond with "Yes", pronounce "Yes", otherwise say "No". If this is the correct contact but the wrong number, say "Forward" or "Backward" to navigate to the phone number you'd like to call. To call the displayed phone number, pronounce "Call". You can also scroll through the phone number list manually by pressing the buttons on the back of the steering wheel until you find the required number. Then, press PRESET UP/OK button on the rear of the steering wheel to start the call.
- To end the phone call, press the PHONE HANG UP button on the steering wheel.

Media Player

- With the BLUE&ME™ media player you can play, via the car sound system, the digital audio files stored on a USB device by simply connecting it to the USB port located in the glove box of the car.
- The MEDIA PLAYER menu enables the following:
 - Display tracks stored on your USB stick/iPod®.
 - Play audio files stored on your USB stick/iPod®.

How To Connect The USB Stick/iPod® To BLUE&ME™

- To connect your USB stick/iPod® to BLUE&ME™, proceed as follows:
- Copy tracks on your USB stick/iPod® (BLUE&ME™ recognizes .wma, .mp3 and .wav, .aac formats for audio files and .wpl and .m3u for playlists).
- USB devices without USB wire: just connect the USB stick/iPod® (directly or by an extension lead) to the USB port on the car.

ELECTRONICS

- USB stick/iPod® with USB wire: use the wire to connect the USB stick/iPod® to the USB port on the car.
- Turn the ignition key to ON. BLUE&ME™ will start automatically to play your digital tracks selecting them from the library built at the moment the USB stick/iPod® is connected.
- If AUTOPLAY is set to "ON", BLUE&ME™ will start playback automatically.
- Refer to the iPod®/USB/MP3 CONTROL section in this manual and the BLUE&ME™ User's Manual on the DVD for more details.

WARNING!

Driving while distracted can result in loss of vehicle control, accident and injury. It is strongly recommended that you use extreme caution when using any device or feature that may take your focus off the road or your hands off the steering wheel. Your primary responsibility is the safe operation of your vehicle.

iPod®/USB/MP3 CONTROL

- The USB port located within the glove box, allows you to plug an iPod® or USB device into the vehicle's sound system.
- To hear audio from devices connected to this port press the MEDIA button on the radio faceplate.
- When connected to this feature:
 - The iPod® or USB device audio can be played on the vehicle's sound system.
 - The iPod® can be controlled using the radio buttons to Play, Browse, and List the iPod® or external devices contents. Refer to the BLUE&ME™ Manual on the DVD for details.
 - The iPod® battery charges when plugged into the USB port (if supported by the specific audio device).
 - Compatible iPod® devices may also be controllable using voice commands. Refer to the BLUE&ME™ Manual on the DVD for details.



NOTE:

The USB port supports certain Mini, Classic, Nano, Touch, and iPhone® devices. The USB port also supports playing music from compatible external USB Mass Storage Class memory devices. For supported audio file formats, refer to the USB Port section on the Owner's Manual on the DVD. Some iPod® software versions may not fully support the USB port features. Please visit Apple's website for iPod® software updates.

WARNING!

Do not plug in or remove the iPod® or external device while driving. Failure to follow this warning could result in a collision.

ELECTRONIC VEHICLE INFORMATION CENTER (EVIC)

- The EVIC features a driver interactive display that is located in the instrument cluster. Pressing the controls on the right side of the Instrument Cluster allows the driver to select vehicle information and Personal Settings. For additional information, refer to Programmable Features in this guide.
- Press the MENU ESC button to enter the menu mode.
- Press the + or – buttons to scroll through the menu settings.
- Once the menu setting is shown in the EVIC display press the MENU ESC button to access the setting and use the plus or minus buttons to change the current setting. Press the MENU ESC button a second time to save the setting and return to menu screen.

PROGRAMMABLE FEATURES**Electronic Vehicle Information Center (EVIC)**

- The EVIC can be used to program the following Personal Settings. Press and release the MENU ESC button until menu is displayed, then press the + or – buttons to scroll through the settings.
- Once the menu setting is shown in the EVIC display press the MENU ESC button to access the setting and use the + or – buttons to change the current setting. The menu includes the following functions:
 - Charging Schedule
 - Set Date
 - Set Time
 - Standard Units
 - Languages
 - Audio Display
 - Battery % Display
 - Auto Door Lock
 - Remote Unlock
 - Daytime Running Lights
 - Button Volume
 - Hill Start Assist
 - Stored Warning
 - Tutorial
 - Connectivity ID
 - Restore Factory Settings
 - Exit Menu

Selecting An Option Of The Main Menu Without Submenu:

- Briefly press the MENU ESC button to select the main menu option to set.
- Press the + or – button (by single presses) to select the new setting.
- Briefly press the MENU ESC button to store the new setting and go back to the main menu option previously selected.

ELECTRONICS

Selecting An Option Of The Main Menu With Submenu:

- Briefly press the MENU ESC button to display the first submenu option.
- Press the + or – button (by single presses) to scroll through all the submenu options.
- Briefly press the MENU ESC button to select the displayed submenu option and to open the relevant setup menu.
- Press the + or – button (by single presses) to select the new setting for this submenu option.
- Briefly press the MENU ESC button to store the new setting and go back to the previously selected submenu option.
- Press and hold the MENU ESC button to return to the main menu (short hold) or the main screen (longer hold).

TRIP BUTTON

- The Trip button is located on the end of the wiper lever to the right of the steering column. The trip button can be used to display and reset the following functions:
 - Instant Consumption (Kilowatts)
 - Trip A
 - Trip B
 - Tire Pressure
- Short press (less than 1 second) to display different functions.
- Long press (more than 1 second) to reset and start a new trip.



New Trip

- A new trip can be reset or restarted by:
 - "Manual" resetting by the user, by pressing the Trip button;
 - "Automatically" resetting, when the "Trip distance" reaches 999.9 miles or when the "Travel time" reaches 99.59 (99 hours and 59 minutes);

Start Of Trip Procedure

- With the ignition key on, press and hold the TRIP button for over one second to reset Trip A or Trip B.

Exit Trip


- The Trip function is over when all the values have been displayed or holding the MENU ESC button for longer than one second.
- Briefly press the MENU ESC button to go back to the menu screen or press and hold the MENU ESC (approximately one second) to go back to the main screen without storing settings.

POWER OUTLET

- There is a standard 12 Volt (13 Amp) power outlet, located in the floor console, for added convenience. This power outlet can power mobile phones, electronics and other low power devices.

NOTE:

- Do not exceed the maximum power of 160 Watts (13 Amps) at 12 Volts. If the 160 Watt (13 Amp) power rating is exceeded, the fuse protecting the system will need to be replaced.
- Power outlets are designed for accessory plugs only. Do not insert any other object in the power outlet as this will damage the outlet and blow the fuse. Improper use of the power outlet can cause damage not covered by your new vehicle warranty.

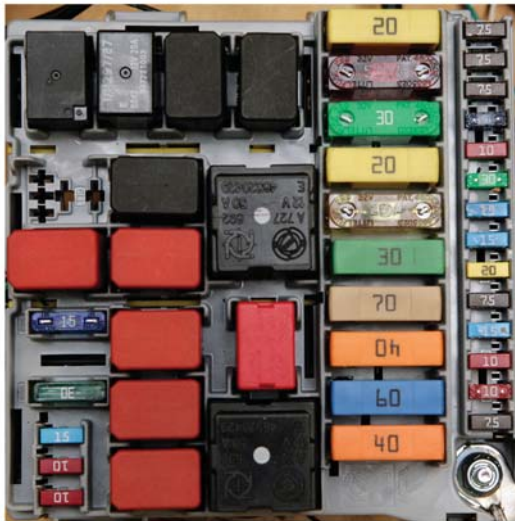

F15 Fuse 15 Amp Blue - Cigar Lighter/Power Outlet Front Console

TRAILER TOWING

- Trailer towing with this vehicle is not recommended.

RECREATIONAL TOWING (BEHIND MOTORHOME, ETC.)

Towing This Vehicle Behind Another Vehicle

Towing Condition	Wheels OFF the Ground	Single-Speed Transmission
Flat Tow	NONE	NOT ALLOWED
Dolly Tow	Front	OK
	Rear	NOT ALLOWED
On Trailer	ALL	OK

NOTE:

This vehicle must be towed on a flatbed or vehicle trailer with the front wheels **OFF** the ground.

WHAT TO DO IN EMERGENCIES

24-HOUR ROADSIDE ASSISTANCE

- If your FIAT 500e requires jump start assistance, tire service, lockout service or towing due to a defect covered under the Basic Limited Warranty, dial toll-free 1-888-242-6342. See your Warranty booklet for further details.
- Provide your name, vehicle identification number and license plate number.
- Provide your location, including telephone number, from which you are calling.
- Briefly describe the nature of the problem and answer a few simple questions.
- You will be given the name of the service provider and an estimated time of arrival. If you feel you are in an "unsafe situation", please let us know. With your consent, we will contact local police or safety authorities.

INSTRUMENT CLUSTER WARNING LIGHTS

- Service Propulsion System Warning Light

- The Service Propulsion System Warning Light will illuminate if there is a malfunction detected with the Propulsion System. If the light comes on or remains on while driving see your authorized studio.

- Electric Vehicle System Warning Light

- This indicator will illuminate when there is a malfunction in the Electric Vehicle System. If the EV malfunction light comes on while driving or charging see your authorized studio as soon as possible.

- Regenerative Brake System Warning Light

- If the light turns on and remains on while driving, it suggests that there is a potential problem with the Regenerative Brake System (RBS) and the need for system service. See your authorized studio as soon as possible.

- Power Steering System Warning

- This light is used to manage the electrical warning of the EPS (Power Steering System). When the ignition is turned to the ON/RUN position, the warning light will illuminate momentarily. If the warning light stays on, cycle the ignition to the OFF position and back to ON/RUN. If the warning light stays on, contact your authorized Fiat Studio.

If the warning light switches on while driving you may not have steering assistance. Although it will still be possible to steer the car, the effort needed to operate the steering wheel could be increased: contact an authorized Fiat Studio as soon as possible.

Refer to "Power Steering" in "Starting and Operating" for further information.

- Electronic Stability Control (ESC) OFF Indicator Light

- This light indicates the ESC system has been turned off by the driver.

WHAT TO DO IN EMERGENCIES

ESC - Electronic Stability Control (ESC) Activation / Malfunction Indicator Light

- The “ESC Activation/Malfunction Indicator Light” in the instrument cluster will come on for four seconds when the ignition switch is turned to the ON/RUN position. If the “ESC Activation/Malfunction Indicator Light” comes on continuously with the engine running, a malfunction has been detected in the ESC system. If this light remains on, see your authorized studio as soon as possible to have the problem diagnosed and corrected.

NOTE:

- The “ESC Off Indicator Light” and the “ESC Activation/Malfunction Indicator Light” come on momentarily each time the ignition switch is turned to ON/RUN.
- Each time the ignition is turned to ON/RUN, the ESC system will be ON even if it was turned off previously.
- ESC Activation/Malfunction Light can blink during a ESC or TC intervention.

(!) - Tire Pressure Monitoring System (TPMS) Light

- Each tire, should be checked monthly, when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tire inflation pressure label. (If your vehicle has tires of a different size than the size indicated on the vehicle placard or tire inflation pressure label, you should determine the proper tire inflation pressure for those tires.)
- As an added safety feature, your vehicle has been equipped with a Tire Pressure Monitoring System (TPMS) that illuminates a low tire pressure telltale when one or more of your tires is significantly under-inflated. Accordingly, when the low tire pressure telltale illuminates, you should stop and check your tires as soon as possible, and inflate them to the proper pressure. Driving on a significantly under-inflated tire causes the tire to overheat and can lead to tire failure. Under-inflation also reduces fuel efficiency and tire tread life, and may affect the vehicle's handling and stopping ability.
- **IF THE LIGHT STARTS FLASHING INDICATING A LOW TIRE PRESSURE, ADJUST THE AIR PRESSURE IN THE LOW TIRE TO THE AIR PRESSURE SHOWN ON THE VEHICLE PLACARD OR TIRE INFLATION PRESSURE LABEL LOCATED ON THE DRIVER'S DOOR. NOTE: AFTER INFLATION, THE VEHICLE MAY NEED TO BE DRIVEN FOR 20 MINUTES BEFORE THE FLASHING LIGHT WILL TURN OFF.**
- Please note that the TPMS is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even if under-inflation has not reached the level to trigger illumination of the TPMS low tire pressure telltale.
- Your vehicle has also been equipped with a TPMS malfunction indicator to indicate when the system is not operating properly. The TPMS malfunction indicator is combined with the low tire pressure telltale. When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue each time the vehicle is restarted as long as the malfunction exists.

WHAT TO DO IN EMERGENCIES

- When the malfunction indicator is illuminated, the system may not be able to detect or signal low tire pressure as intended. TPMS malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tires or wheels on the vehicle that prevent the TPMS from functioning properly. Always check the TPMS malfunction telltale after replacing one or more tires or wheels on your vehicle, to ensure that the replacement or alternate tires and wheels allow the TPMS to continue to function properly.

NOTE:

Tire pressures change by approximately 1 psi (7 kPa) per 12° F (7° C) of air temperature change. Keep this in mind when checking tire pressure inside a garage, especially in the Winter. Example: If garage temperature is 68°F (20°C) and the outside temperature is 32°F (0°C), then the cold tire inflation pressure should be increased by 3 psi (21 kPa), which equals 1 psi (7 kPa) for every 12°F (7°C) for this outside temperature condition.

CAUTION!

The TPMS has been optimized for the original equipment tires and wheels. TPMS pressures and warning have been established for the tire size equipped on your vehicle. Undesirable system operation or sensor damage may result when using replacement equipment that is not of the same size, type, and/or style. Aftermarket wheels can cause sensor damage. Do not use tire sealant from a can, or balance beads if your vehicle is equipped with a TPMS, as damage to the sensors may result.

BRAKE - Brake Warning Light

- The Brake Warning light illuminates when there is either a system malfunction or the parking brake is applied. If the light is on and the parking brake is not applied, it indicates a possible brake hydraulic malfunction, brake booster problem or an Anti-Lock Brake System problem.
- Please have your vehicle serviced immediately.

WARNING!

Driving a vehicle with the red brake light on is dangerous. Part of the brake system may have failed. It will take longer to stop the vehicle. You could have a collision. Have the vehicle checked immediately.

- 12 Volt Charging System Light

- This light shows the status of the 12 Volt electrical charging system. If the charging system light remains on, it means that the vehicle is experiencing a problem with the charging system.
- We recommend you do not continue driving if the charging system light is on. Have the vehicle serviced immediately.

WHAT TO DO IN EMERGENCIES

- Anti-Lock Brake (ABS) Light

- This light monitors the Anti-Lock Brake System (ABS).
- If the light is not on during starting, stays on, or turns on while driving, we recommend you drive to the nearest authorized studio immediately and have the vehicle serviced immediately.

- Air Bag Warning Light


- If the light is not on during starting, stays on, or turns on while driving, have the vehicle serviced by an authorized studio immediately.

TIREFIT KIT

- Your vehicle may be equipped with a TIREFIT kit. The TIREFIT kit is located under the front driver's seat.
- Small punctures up to 1/4 in (6 mm) in the tire tread can be sealed with TIREFIT. Foreign objects (e.g., screws or nails) should not be removed from the tire. TIREFIT can be used in outside temperatures down to approximately -4°F (-20°C).
- This kit will provide a temporary tire seal, allowing you to drive your vehicle up to 100 miles (160 km) with a maximum speed of 55 mph (88 km/h).


TIREFIT Storage

- The TIREFIT kit is located in the rear cargo area.

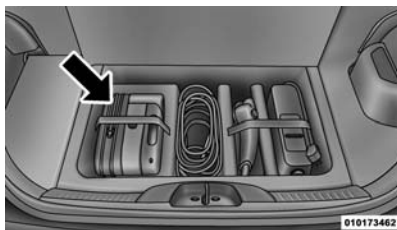

TIREFIT Kit Components and Operation

1. Sealant Bottle
2. Deflation Button
3. Pressure Gauge
4. Power Button
5. Mode Select Knob
6. Sealant Hose (Clear)
7. Air Pump Hose (Black)
8. Power Plug

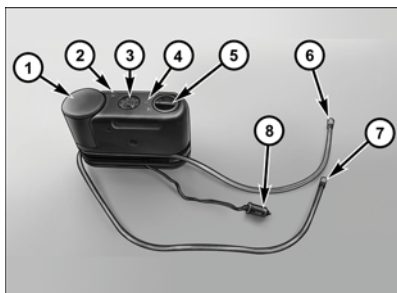

WHAT TO DO IN EMERGENCIES

Using The Mode Select Knob and Hoses

- Your TIREFIT kit is equipped with the following symbols to indicate the air or sealant mode.



Selecting Air Mode

- Turn the Mode Select Knob (5) to this position for air pump operation only. Use the Black Air Pump Hose (7) when selecting this mode.



Selecting Sealant Mode

- Turn the Mode Select Knob (5) to this position to inject the TIREFIT Sealant and to inflate the tire. Use the Sealant Hose (clear hose) (6) when selecting this mode.



Using The Power Button

- Push and release the Power Button (4) once to turn On the TIREFIT kit. Push and release the Power Button (4) again to turn Off the TIREFIT kit.



Using The Deflation Button

- Press the Deflation Button (2) to reduce the air pressure in the tire if it becomes over-inflated.

TIREFIT Usage Precautions

- Replace the TIREFIT Sealant Bottle (1) and Sealant Hose (6) prior to the expiration date (printed on the bottle label) to assure optimum operation of the system. Refer to "Sealing a Tire with TIREFIT" section (F) "Sealant Bottle and Hose Replacement".
- The Sealant Bottle (1) and Sealant Hose (6) are a one tire application use. After each use, always replace these components immediately at an authorized studio.
- When the TIREFIT sealant is in a liquid form, clean water, and a damp cloth will remove the material from the vehicle or tire and wheel components. Once the sealant dries, it can easily be peeled off and properly discarded.
- For optimum performance, make sure the valve stem on the wheel is free of debris before connecting the TIREFIT kit.
- You can use the TIREFIT air pump to inflate bicycle tires. The kit also comes with two needles, located in the Accessory Storage Compartment (on the bottom of the air pump) for inflating sport balls, rafts, or similar inflatable items. However, use only the Air Pump Hose (7) and make sure the Mode Select Knob (5) is in the Air Mode when inflating such items to avoid injecting sealant into them. The TIREFIT Sealant is only intended to seal punctures less than 1/4 in (6 mm) diameter in the tread of your vehicle.
- Do not lift or carry the TIREFIT kit by the hoses.

WHAT TO DO IN EMERGENCIES

Sealing A Tire With TIREFIT

(A) Whenever You Stop To Use TIREFIT:

1. Pull over to a safe location and turn on the vehicle's Hazard Warning flashers.
2. Verify that the valve stem (on the wheel with the deflated tire) is in a position that is near to the ground. This will allow the TIREFIT Hoses (6) and (7) to reach the valve stem and keep the TIREFIT kit flat on the ground. This will provide the best positioning of the kit when injecting the sealant into the deflated tire and running the air pump. Move the vehicle as necessary to place the valve stem in this position before proceeding.
3. Place the transmission in PARK (auto transmission) or in Gear (manual transmission) and cycle the ignition to the OFF position.
4. Set the parking brake.

(B) Setting Up To Use TIREFIT:

1. Turn the Mode Select Knob (5) to the Sealant Mode position.
2. Uncoil the Sealant Hose (6) and then remove the cap from the fitting at the end of the hose.
3. Place the TIREFIT kit flat on the ground next to the deflated tire.
4. Remove the cap from the valve stem and then screw the fitting at the end of the Sealant Hose (6) onto the valve stem.
5. Uncoil the Power Plug (8) and insert the plug into the vehicle's 12 Volt power outlet.
6. Do not remove foreign objects (e.g., screws or nails) from the tire.

(C) Injecting TIREFIT Sealant Into The Deflated Tire:

- Always start the engine before turning ON the TIREFIT kit.
- After pressing the Power Button (4), the sealant (white fluid) will flow from the Sealant Bottle (1) through the Sealant Hose (6) and into the tire.

NOTE:

Sealant may leak out through the puncture in the tire.

- **If the sealant (white fluid) does not flow** within 0 – 10 seconds through the Sealant Hose (6):
 1. Press the Power Button (4) to turn Off the TIREFIT kit. Disconnect the Sealant Hose (6) from the valve stem. Make sure the valve stem is free of debris. Reconnect the Sealant Hose (6) to the valve stem. Check that the Mode Select Knob (5) is in the Sealant Mode position and not Air Mode. Press the Power Button (4) to turn On the TIREFIT kit.
 2. Connect the Power Plug (8) to a different 12 Volt power outlet in your vehicle or another vehicle, if available. Make sure the engine is running before turning ON the TIREFIT kit.
 3. The Sealant Bottle (1) may be empty due to previous use. Call for assistance.

WHAT TO DO IN EMERGENCIES

NOTE:

If the Mode Select Knob (5) is on Air Mode and the pump is operating, air will dispense from the Air Pump Hose (7) only, not the Sealant Hose (6).

- **If the sealant (white fluid) does flow** through the Sealant Hose (6):
 1. Continue to operate the pump until sealant is no longer flowing through hose (typically takes 30 - 70 seconds). As the sealant flows through the Sealant Hose (6), the Pressure Gauge (3) can read as high as 70 psi (5 kPa). The Pressure Gauge (3) will decrease quickly from approximately 70 psi (5 kPa) to the actual tire pressure when the Sealant Bottle (1) is empty.
 2. The pump will start to inject air into the tire immediately after the Sealant Bottle (1) is empty. Continue to operate the pump and inflate the tire to the pressure indicated on the tire pressure label on the driver-side latch pillar (recommended pressure). Check the tire pressure by looking at the Pressure Gauge (3).
- **If the tire does not inflate to at least 26 psi (1.8 kPa) pressure within 15 minutes:**
- The tire is too badly damaged. Do not attempt to drive the vehicle further. Call for assistance.

NOTE:

If the tire becomes over-inflated, press the Deflation Button to reduce the tire pressure to the recommended inflation pressure before continuing.

- **If the tire does not inflate to at least 26 psi (1.8 kPa) pressure within 15 minutes:**
 1. Press the Power Button (4) to turn off the TIREFIT kit.
 2. Remove the Speed Limit sticker from the top of the Sealant Bottle (1) and place the sticker on the instrument panel.
 3. Immediately disconnect the Sealant Hose (6) from the valve stem, reinstall the cap on the fitting at the end of the hose, and place the TIREFIT kit in the vehicle storage location. Quickly proceed to (D) "Drive Vehicle".

(D) Drive Vehicle:

- Immediately after injecting sealant and inflating the tire, drive the vehicle 5 miles (8 km) or 10 minutes to ensure distribution of the TIREFIT Sealant within the tire. Do not exceed 55 mph (88 km/h).

(E) After Driving:

- Pull over to a safe location. Refer to "Whenever You Stop to Use TIREFIT" before continuing.
 1. Turn the Mode Select Knob (5) to the Air Mode position.
 2. Uncoil the Air Pump Hose (7) (black in color) and screw the fitting at the end of hose (7) onto the valve stem.
 3. Uncoil the power plug and insert the plug into the vehicles 12 Volt power outlet.
 4. Check the pressure in the tire by reading the Pressure Gauge (3).
- **If tire pressure is less than 19 psi (1.3 kPa), the tire is too badly damaged. Do not attempt to drive the vehicle further. Call for assistance.**

WHAT TO DO IN EMERGENCIES

If the tire pressure is 19 psi (1.3 kPa) or higher:

1. Press the Power Button (4) to turn on TIREFIT and inflate the tire to the pressure indicated on the tire and loading information label on the driver-side door opening.
2. Disconnect the TIREFIT kit from the valve stem, reinstall the cap on the valve stem and unplug from 12 Volt outlet.
3. Place the TIREFIT kit in its proper storage area in the vehicle.
4. Have the tire inspected and repaired or replaced at the earliest opportunity at an authorized studio or tire service center.
5. Replace the Sealant Bottle (1) and Sealant Hose (6) assembly at your authorized studio as soon as possible. Refer to "(F) Sealant Bottle and Hose Replacement."

NOTE:

- If the tire becomes over-inflated, press the Deflation Button to reduce the tire pressure to the recommended inflation pressure before continuing.
- When having the tire serviced, advise the authorized studio or service center that the tire has been sealed using the TIREFIT service kit.

(F) Sealant Bottle And Hose Replacement:

1. Uncoil the Sealant Hose (6) (clear in color).
2. Locate the round Sealant Bottle release button in the recessed area under the sealant bottle.
3. Press the Sealant Bottle release button. The Sealant Bottle (1) will pop up. Remove the bottle and dispose of it accordingly.
4. Clean any remaining sealant from the TIREFIT housing.
5. Position the new Sealant Bottle (1) in the housing so that the Sealant Hose (6) aligns with the hose slot in the front of the housing. Press the bottle into the housing. An audible click will be heard indicating the bottle is locked into place.
6. Verify that the cap is installed on the fitting at the end of the Sealant Hose (6) and return the hose to its storage area (located on the bottom of the air pump).
7. Return the TIREFIT kit to its storage location in the vehicle.

CAUTION!

- The metal end fitting from Power Plug (8) may get hot after use, so it should be handled carefully.
- Failure to reinstall the cap on the fitting at the end of the Sealant Hose (6) can result in sealant contacting your skin, clothing, and the vehicle's interior. It can also result in sealant contacting internal TIREFIT kit components which may cause permanent damage to the kit.

WHAT TO DO IN EMERGENCIES

WARNING!

- Do not attempt to seal a tire on the side of the vehicle closest to traffic. Pull far enough off the road to avoid the danger of being hit when using the TIREFIT kit.
- Do not use TIREFIT or drive the vehicle under the following circumstances:
 - If the puncture in the tire tread is approximately 1/4 in. (6 mm) or larger.
 - If the tire has any sidewall damage.
 - If the tire has any damage from driving with extremely low tire pressure.
 - If the tire has any damage from driving on a flat tire.
 - If the wheel has any damage.
 - If you are unsure of the condition of the tire or the wheel.
- Keep TIREFIT away from open flames or heat source.
- A loose TIREFIT kit thrown forward in a collision or hard stop could endanger the occupants of the vehicle. Always stow the TIREFIT kit in the place provided. Failure to follow these warnings can result in injuries that are serious or fatal to you, your passengers, and others around you.
- Take care not to allow the contents of TIREFIT to come in contact with hair, eyes, or clothing. TIREFIT is harmful if inhaled, swallowed, or absorbed through the skin. It causes skin, eye, and respiratory irritation. Flush immediately with plenty of water if there is any contact with eyes or skin. Change clothing as soon as possible, if there is any contact with clothing.
- TIREFIT Sealant solution contains latex. In case of an allergic reaction or rash, consult a physician immediately. Keep TIREFIT out of reach of children. If swallowed, rinse mouth immediately with plenty of water and drink plenty of water. Do not induce vomiting! Consult a physician immediately.
- TIREFIT is not a permanent flat tire repair. Have the tire inspected and repaired or replaced after using TIREFIT. Do not exceed 55 mph (88 km/h) until the tire is repaired or replaced. Failure to follow this warning can result in injuries that are serious or fatal to you, your passengers, and others around you.

WHAT TO DO IN EMERGENCIES

JUMP-STARTING PROCEDURE — 12 VOLT BATTERY

- If your vehicle has a discharged 12 Volt battery, it can be jump-started using a set of jumper cables and a battery in another vehicle or by using a portable battery booster pack. Jump-starting can be dangerous if done improperly so please follow the procedures in this section carefully.

NOTE:

When using a portable battery booster pack, follow the manufacturer's operating instructions and precautions.

Preparations For Jump-Start

- The battery in your vehicle is located in the underhood compartment under the beauty cover.
1. Set the parking brake, place the transmission into PARK and turn the ignition to OFF/LOCK.
 2. Turn off the heater, radio, and all unnecessary electrical accessories.
 3. If using another vehicle to jump-start the battery, park the vehicle within the jumper cables reach, set the parking brake and make sure the ignition is OFF.

Jump-Starting Procedure

1. Connect the positive (+) end of the jumper cable to the positive (+) post of the discharged vehicle.
 2. Connect the opposite end of the positive (+) jumper cable to the positive (+) post of the booster battery.
 3. Connect the negative end (-) of the jumper cable to the negative (-) post of the booster battery.
 4. Connect the opposite end of the negative (-) jumper cable to a good ground (exposed metal part of the discharged vehicle) away from the battery and the high voltage cables.
 5. Start the engine in the vehicle that has the booster battery, let the engine idle a few minutes, and then start the the vehicle with the discharged battery.
- Once the vehicle has started, remove the jumper cables in the reverse sequence:
 1. Disconnect the negative (-) jumper cable from the ground (-) of the vehicle with the discharged battery.
 2. Disconnect the negative end (-) of the jumper cable from the negative (-) post of the booster battery.

WHAT TO DO IN EMERGENCIES

3. Disconnect the opposite end of the positive (+) jumper cable from the positive (+) post of the booster battery.
 4. Disconnect the positive (+) end of the jumper cable from the positive (+) post of the discharged vehicle.
- If frequent jump-starting is required to start your vehicle, you should have the battery and charging system inspected at your authorized studio.

CAUTION!

- Accessories that can be plugged into the vehicle power outlets draw power from the vehicle's battery, even when not in use (i.e., cellular phones, etc.). Eventually, if plugged in long enough, the vehicle's battery will discharge sufficiently to degrade battery life and/or prevent the engine from starting.
- Do not use a portable battery booster pack or any other booster source with a system voltage greater than 12 Volts or damage to the battery, starter motor, alternator or electrical system may occur.
- Failure to follow these procedures could result in damage to the charging system of the booster vehicle or the discharged vehicle.

WARNING!

- Do not attempt jump-starting if the battery is frozen. It could rupture or explode and cause personal injury.
- Take care to avoid the radiator cooling fan whenever the hood is raised. It can start anytime the ignition switch is on. You can be injured by moving fan blades.
- Remove any metal jewelry such as watch bands or bracelets that might make an inadvertent electrical contact. You could be seriously injured.
- Batteries contain sulfuric acid that can burn your skin or eyes and generate hydrogen gas which is flammable and explosive. Keep open flames or sparks away from the battery.
- Do not allow vehicles to touch each other as this could establish a ground connection and personal injury could result.
- Failure to follow this procedure could result in personal injury or property damage due to battery explosion.
- Do not connect the cable to the negative post (-) of the discharged battery. The resulting electrical spark could cause the battery to explode and could result in personal injury.


WHAT TO DO IN EMERGENCIES

MANUAL PARK RELEASE

WARNING!

Always secure your vehicle by fully applying the parking brake, before activating the Manual Park Release. Activating the Manual Park Release will allow your vehicle to roll away if it is not secured by the parking brake or other means. Activating the Manual Park Release on an unsecured vehicle could lead to serious injury or death for those in or around the vehicle.

- In order to move the vehicle in cases where the transmission will not shift out of PARK (such as a dead battery), a Manual Park Release is available. If a dead 12 volt battery is the cause of the condition refer to “Jump Start Procedure — 12 Volt Battery” before performing the Manual Park Release.
- To perform the Manual Park Release follow these steps:
 1. To prevent the vehicle from rolling unintentionally, firmly apply the parking brake.
 2. If possible, raise the front driver's side of the vehicle to provide access to the transmission.
 3. Working from underneath the vehicle, remove the black rubber plug from the front of the Park module (a black canister mounted on the front of the transmission).
 4. Using a T25 driver bit, rotate the Manual Park Release shaft (located just behind the rubber plug) clockwise, at least 20 turns, to release the Park mechanism. The vehicle is now out of PARK and can be moved.
 5. Reinstall the rubber plug.
 6. Release the parking brake only when a driver is in the vehicle, or the vehicle is secured by other means. The Manual Park Release will be reset automatically once the vehicle is restarted.

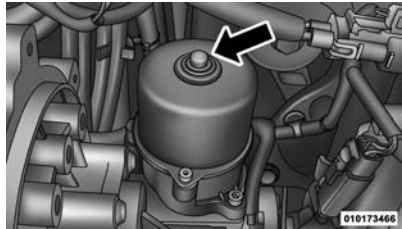

WHAT TO DO IN EMERGENCIES

TOWING A DISABLED VEHICLE

- This section describes procedures for towing a disabled vehicle using a commercial wrecker service.

Towing Condition	Wheels OFF The Ground	Single-Speed Transmission
Flat Tow	NONE	NOT ALLOWED
Wheel Lift	Rear	NOT ALLOWED
	Front	OK
Flatbed	ALL	OK

- This vehicle must be towed on a flatbed truck or vehicle trailer with the front wheels OFF the ground.
- If you must use the accessories (wipers, defrosters, etc.) while being towed, the ignition must be in the ON/RUN position, not the ACC position.
- If the ignition key is unavailable, or the battery is discharged, see "Manual Park Release" in "What To Do In Emergencies" for instructions on shifting the transmission out of PARK for towing.

CAUTION!

DO NOT use sling-type equipment when towing. When securing the vehicle to a flat-bed truck, do not attach to front or rear suspension components. Damage to your vehicle may result from improper towing.

WHAT TO DO IN EMERGENCIES

ENHANCED ACCIDENT RESPONSE SYSTEM

- In the event of an impact causing air bag deployment, if the communication network and power remains intact, depending on the nature of the event, the ORC will determine whether to have the Enhanced Accident Response System perform the following functions:
 - Disable the high voltage battery.
 - Place the transmission into PARK.
 - Flash hazard lights as long as the 12 Volt battery has power or until the ignition key is turned off.
 - Turn on the interior lights, which remain on as long as the 12 Volt battery has power or until the ignition key is removed.
 - Unlock the doors automatically.
- In order to move your vehicle to the side of the road the transmission must be in NEUTRAL and the 12 Volt system must be functional. To place the transmission into NEUTRAL you must turn the ignition OFF and then back to the RUN position (cycle the ignition) then press the NEUTRAL button.

NOTE:

The high voltage battery will remain disabled after an Enhanced Accident Response Event and must be reset by your authorized studio.

FREEING A STUCK VEHICLE

- If your vehicle becomes stuck in mud, sand or snow, it can often be moved using a rocking motion. Turn the steering wheel right and left to clear the area around the front wheels. Then shift back and forth between DRIVE and REVERSE while gently pressing the accelerator. Use the least amount of accelerator pedal pressure that will maintain the rocking motion, without spinning the wheels.

NOTE:

Press the "ESC Off" switch, to place the Electronic Stability Control (ESC) system in "Partial Off" mode, before rocking the vehicle. Refer to "Electronic Brake Control" in "Starting And Operating" for further information. Once the vehicle has been freed, press the "ESC Off" switch again to restore "ESC On" mode.

CAUTION!

- When "rocking" a stuck vehicle by shifting between DRIVE and REVERSE, do not spin the wheels faster than 15 mph (24 km/h), or drivetrain damage may result.
- Spinning the wheels too fast may lead to transmission overheating and failure. It can also damage the tires. Do not spin the wheels above 30 mph (48 km/h) while in gear.

WHAT TO DO IN EMERGENCIES

WARNING!

Fast spinning tires can be dangerous. Forces generated by excessive wheel speeds may cause damage, or even failure, of the axle and tires. A tire could explode and injure someone. Do not spin your vehicle's wheels faster than 30 mph (48 km/h) or for longer than 30 seconds continuously without stopping when you are stuck and do not let anyone near a spinning wheel, no matter what the speed.

EVENT DATA RECORDER (EDR)

- This vehicle is equipped with an Event Data Recorder (EDR). The main purpose of an EDR is to record, in certain crash or near crash-like situations, such as an air bag deployment or hitting a road obstacle, data that assists in understanding how a vehicle's systems performed. The EDR is designed to record data related to vehicle dynamics and safety systems for a short period of time, typically 30 seconds or less. The EDR in this vehicle is designed to record such data as:
 - How various systems in your vehicle were operating.
 - Whether or not the driver and passenger safety belts were buckled/fastened.
 - How far (if at all) the driver was depressing the accelerator and/or brake pedal.
 - How fast the vehicle was traveling.
- These data can help provide a better understanding of the circumstances in which crashes and injuries occur.

NOTE:

EDR data are recorded by your vehicle only if a non-trivial crash situation occurs; no data are recorded by the EDR under normal driving conditions and no personal data (e.g. name, gender, age, and crash location) are recorded. However, other parties, such as law enforcement, could combine the EDR data with the type of personally identifying data routinely acquired during a crash investigation.

- To read data recorded by an EDR, special equipment is required, and access to the vehicle or the EDR is needed. In addition to the vehicle manufacturer, other parties such as law enforcement, that have the special equipment, can read the information if they have access to the vehicle or the EDR.

MAINTAINING YOUR VEHICLE

OPENING THE HOOD

- Pull the release lever located below the instrument panel and in front of the driver's door.
- Raise the hood and locate the safety latch in the middle of the hood opening.
- Move the safety latch while lifting the hood at the same time.
- Insert the support rod into the slot on the hood.
- To close the hood, remove the support rod and place it in the retaining clip, then lower the hood slowly.



WARNING!

Be sure the hood is fully latched before driving your vehicle. If the hood is not fully latched, it could open when the vehicle is in motion and block your vision. Failure to follow this warning could result in serious injury or death.

UNDERHOOD COMPARTMENT



MAINTAINING YOUR VEHICLE

FLUIDS AND CAPACITIES

Systems	U.S.	Metric
Brake Master Cylinder		
MOPAR® DOT 3, SAE J1703 should be used. If DOT 3, SAE J1703 brake fluid is not available, then DOT 4 is acceptable. Use only recommended brake fluids or equivalent.		
Refrigerant		
MOPAR® R134a		
Compressor Lubricant		
MOPAR® POE Oil or Equivalent meeting the requirements of Chrysler Material Standard MS-12727		
Single-Speed Transmission		
Castrol BOT 533	0.8 Quarts	750 ml
Power Electronics Cooling System	3.6 Quarts	3.5 Liters
MOPAR® Antifreeze/Engine Coolant 10 Year/150,000 Mile Formula or equivalent		
Battery Thermal Management Cooling System	7.0 Quarts	6.7 Liters
MOPAR® Antifreeze/Engine Coolant 10 Year/150,000 Mile Formula or equivalent		

CAUTION!

- Mixing of coolant (antifreeze) other than specified Organic Additive Technology (OAT) coolant (antifreeze), may result in cooling system damage and may decrease corrosion protection. Organic Additive Technology (OAT) coolant is different and should not be mixed with Hybrid Organic Additive Technology (HOAT) coolant (antifreeze). If a non-OAT coolant (antifreeze) is introduced into the cooling system in an emergency, it should be replaced with the specified coolant (antifreeze) as soon as possible.
- Do not use water alone or alcohol-based coolant (antifreeze) products. Do not use additional rust inhibitors or antirust products, as they may not be compatible with the radiator coolant and may plug the radiator.
- This vehicle has not been designed for use with propylene glycol-based coolant (antifreeze). Use of propylene glycol-based coolant (antifreeze) is not recommended.

MAINTAINING YOUR VEHICLE

MAINTENANCE SCHEDULE

Once A Month Or Before A Trip:

- Check windshield washer fluid level
- Check the tire inflation pressures and look for unusual wear or damage
- Check the fluid levels of the coolant reservoirs and brake master cylinder
- Check function of all interior and exterior lights

Required Maintenance Intervals.

Refer to the maintenance schedules on the following page for the required maintenance intervals.

At Every Service Interval:
<ul style="list-style-type: none">• Rotate the tires. Rotate at the first sign of irregular wear. The front and rear tires are different sizes and cannot be used in place of each other; refer to "Tire Rotation Recommendations" for further information.
<ul style="list-style-type: none">• Inspect brake pads, shoes, rotors, drums, and hoses.
<ul style="list-style-type: none">• Inspect battery cooling system protection and hoses.
<ul style="list-style-type: none">• Check and adjust hand brake.

MAINTAINING YOUR VEHICLE

Maintenance Chart

Refer to the Maintenance Schedules on the following pages for the required maintenance intervals.

Mileage or time passed (whichever comes first)	20,000	30,000	40,000	50,000	60,000	70,000	80,000	90,000	100,000	110,000	120,000	130,000	140,000	150,000
	Or Years:	3	4	5	6	7	8	9	10	11	12	13	14	15
Or Kilometers:	32,000	48,000	64,000	80,000	96,000	112,000	128,000	144,000	160,000	176,000	192,000	208,000	224,000	240,000
Additional Inspections														
Inspect the CV joints.		X			X			X			X			X
Inspect front suspension, tie rod ends and boot seals, and replace if necessary.	X		X		X		X		X		X		X	
Inspect the brake linings, parking brake function.	X		X		X		X		X		X		X	
Additional Maintenance														
Replace cabin air filter.	X		X		X		X		X		X		X	
Clean and lube sun roof tracks.			X		X		X		X		X		X	
Flush and replace the Power Electronics and Battery Thermal Loop Systems at 10 years or 150,000 miles (240,000 km) whichever comes first.									X					X

WARNING!

- You can be badly injured working on or around an electric motor vehicle. Do only service work for which you have the knowledge and the right equipment. If you have any doubt about your ability to perform a service job, take your vehicle to a competent mechanic.
- Failure to properly inspect and maintain your vehicle could result in a component malfunction and effect vehicle handling and performance. This could cause an accident.

FUSES

Interior Fuses

- The interior fuse panel is part of the Body Control Module (BCM) and is located on the driver's side under the instrument panel.

Cavity	Vehicle Fuse Number	Mini Fuse	Description
1	F12	7.5 Amp Brown	Right Low Beam
2	F32	5 Amp Tan	Front and Rear Ceiling Lights Trunk and Door Courtesy Lights
3	F53	5 Amp Tan	Instrument Panel Node
4	F38	20 Amp Yellow	Central Door Locking
5	F36	10 Amp Red	Diagnostic Socket, Car Radio, Climate Control System, Tire Pressure Monitor, TCU and CTM
6	F43	20 Amp Yellow	Bi-Directional Washer
7	F48	20 Amp Yellow	Passenger Power Window
8	F13	7.5 Amp Brown	Left Low Beam
9	F50	7.5 Amp Brown	Airbag
10	F51	5 Amp Tan	Car Radio Switch, Climate Control System, Stop Light, Exterior Mirrors, Sunroof Switch, GPS (option) and CTM
11	F37	5 Amp Tan	Stop Light Switch, Instrument Panel Node
12	F49	5 Amp Tan	Exterior Mirror, GPS, Electric Mirror, Parking Sensor, Sunroof Switch
13	F31	5 Amp Tan	Ignition, Climate Control, RDU and EVCU
14	F47	20 Amp Yellow	Driver Power Window

MAINTAINING YOUR VEHICLE

Power Distribution Center #1

- The Power Distribution Center #1 is located on the right side of the underhood compartment. To access the fuses, remove locking screw and slide cover off.
- The ID number of the electrical component corresponding to each fuse can be found on the back of the cover.

Cavity	Maxi Fuse	Mini Fuse	Description
F01	60 Amp Blue		Body Control Module (BCM)
F02	20 Amp Yellow		HiFi Amplifier
F03	20 Amp Yellow		Ignition Switch
F04	40 Amp Orange		Brake System Module Pump
F05	70 Amp Tan		Electric Power Steering (EPS)
F06	60 Amp Blue		Radiator Fan
F07	40 Amp Orange		Regen Brake Module
F08	40 Amp Orange		HVAC
F09		5 Amp Tan	Air Electric Heater Charge Indicator
F10		10 Amp Red	Horn
F11		10 Amp Red	Electronic Vehicle Control Unit (EVCU)
F14		5 Amp Tan	High beam (Shutter)
F15		15 Amp Blue	Cigar Lighter
F16		10 Amp Red	Humidity Sensor VPAM AC Compressor
F18		5 Amp Tan	Electronic Vehicle Control Unit (EVCU)
F19		10 Amp Red	HVAC
F20		15 Amp Blue	Heated Seats – If Equipped
F23		25 Amp Clear	Anti-Lock Brake Valves
F24		7.5 Amp Brown	EPS YAW Sensor
F30		15 Amp Blue	Fog Lamps
F81	30 Amp Green		Electronic Shifter (ESM)
F82	30 Amp Green		Sunroof
F84		25 Amp Clear	Regen Brake Module
F85	30 Amp Green		Rear Window Heater
F87		5 Amp Tan	Electronic Shifter (ESM)
F90		5 Amp Tan	Heated Mirrors

MAINTAINING YOUR VEHICLE

Power Distribution Center (PDC) #2

- The Power Distribution Center #2 is located next to the battery in the underhood compartment. To access the fuses, pull the release tabs and remove the cover.

Cavity	Maxi Fuse	Mini Fuse	Description
FPT9		15 Amp Blue	Battery Pack Control Module (BPCM) Power Inverter Module (PIM)
FPT13		10 Amp Red	EAC (AC Compressor) On Board Charging Module (OBCM)
FPT16		5 Amp Tan	Intelligent Battery Sensor (IBS)
FPT17		10 Amp Red	EAC (AC Compressor) Radiator Fan
FPT20		10 Amp Red	Electronic Vehicle Control Unit (EVCU)

Cavity	Cartridge Fuse	Description
FPT3	20 Amp Clear	Batt Coolant Pump
FPT5	20 Amp Yellow	Inverter Coolant Pump

TIRE PRESSURES

- Check the inflation pressure of each tire, including the spare tire, at least monthly and inflate to the recommended pressure for your vehicle.
- The tire pressures recommended for your vehicle are found on the "Tire and Loading Information" label located on the driver's side door opening.

NOTE:

Refer to the Owner's Manual on the DVD for more information regarding tire warnings and instructions.



MAINTAINING YOUR VEHICLE

WARNING!


- Overloading of your tires is dangerous. Overloading can cause tire failure, affect vehicle handling, and increase your stopping distance. Use tires of the recommended load capacity for your vehicle. Never overload them.
- Improperly inflated tires are dangerous and can cause collisions. Under-inflation is the leading cause of tire failure and may result in severe cracking, component separation, or "blow out". Over-inflation reduces a tire's ability to cushion shock. Objects on the road and chuck holes can cause damage that results in tire failure. Unequal tire pressures can cause steering problems. You could lose control of your vehicle. Over-inflated or under-inflated tires can affect vehicle handling and can fail suddenly, resulting in loss of vehicle control.

TIRE ROTATION RECOMMENDATIONS

NOTE:

The front and rear tires are different sizes and cannot be used in place of each other. Rotate the tires "side-to-side" as shown in the diagram.

- The tires on the front and rear of your vehicle operate at different loads and perform different steering, driving, and braking functions. For these reasons, they wear at unequal rates.
- These effects can be reduced by timely rotation of tires. The benefits of rotation are especially worthwhile with aggressive tread designs such as those on all season type tires. Rotation will increase tread life, help to maintain mud, snow and wet traction levels, and contribute to a smooth, quiet ride.
- Refer to the "Maintenance Schedule" for the proper maintenance intervals. The reasons for any rapid or unusual wear should be corrected prior to rotation being performed.



8110620

MAINTAINING YOUR VEHICLE

WHEEL AND WHEEL TRIM CARE

All wheels and wheel trim, especially aluminum and chrome plated wheels, should be cleaned regularly using mild (neutral Ph) soap and water to maintain their luster and to prevent corrosion. Wash wheels with the same soap solution recommended for the body of the vehicle.

Your wheels are susceptible to deterioration caused by salt, sodium chloride, magnesium chloride, calcium chloride, etc., and other road chemicals used to melt ice or control dust on dirt roads. Use a soft cloth or sponge and mild soap to wipe away promptly. Do not use harsh chemicals or a stiff brush. They can damage the wheel's protective coating that helps keep them from corroding and tarnishing.

NOTE:

Many aftermarket wheel cleaners contain strong acids or strong alkaline additives that can harm the wheel surface.

CAUTION!

Avoid products or automatic car washes that use acidic solutions or strong alkaline additives or harsh brushes. These products and automatic car washes may damage the wheel's protective finish. Such damage is not covered by the New Vehicle Limited Warranty. Only car wash soap, MOPAR Wheel Cleaner or equivalent is recommended.

When cleaning extremely dirty wheels including excessive brake dust, care must be taken in the selection of tire and wheel cleaning chemicals and equipment to prevent damage to the wheels. Mopar Wheel Treatment or Mopar Chrome Cleaner or their equivalent is recommended or select a non-abrasive, non-acidic cleaner for aluminum or chrome wheels. Do not use any products on Dark Vapor or Black Satin Chrome Wheels. They will permanently damage this finish and such damage is not covered by the New Vehicle Limited Warranty.

CAUTION!

Do not use scouring pads, steel wool, a bristle brush, metal polishes or oven cleaner. These products may damage the wheel's protective finish. Such damage is not covered by the New Vehicle Limited Warranty. Only car wash soap, MOPAR Wheel Cleaner or equivalent is recommended.

NOTE:

If you intend parking or storing your vehicle for an extended period after cleaning the wheels with wheel cleaner, drive your vehicle for a few minutes before doing so. Driving the vehicle and applying the brakes when stopping will reduce the risk of brake rotor corrosion.

MAINTAINING YOUR VEHICLE

Dark Vapor Or Black Satin Chrome Wheels

CAUTION!

If your vehicle is equipped with Dark Vapor or Black Satin Chrome wheels DO NOT USE wheel cleaners, abrasives or polishing compounds. They will permanently damage this finish and such damage is not covered by the New Vehicle Limited Warranty. USE ONLY MILD SOAP AND WATER WITH A SOFT CLOTH. Used on a regular basis; this is all that is required to maintain this finish.

EXTERIOR BULBS

LIGHT BULBS – Exterior	Bulb Number
High Beam Headlight	H1 R2
Low Beam Headlight	H1 R2
Front Park/Daytime	W21/5W
Front Turn Signals	WY21W
Side Turn Signals	W5W
Brake Lights	P21W/5W
Backup Lights	W16W
Interior Cargo Light	C5W
Fog Lights	H11
Center High Mount Stop Light (CHMSL)	W5W

FIAT CUSTOMER CENTER

P.O. Box 21-8004

Auburn Hills, MI 48321-8004

Phone: 1-888-242-6342

ASSISTANCE FOR THE HEARING IMPAIRED

- To assist customers who have hearing difficulties, the manufacturer has installed special TDD (Telecommunication Devices for the Deaf) equipment at its customer center. Any hearing or speech impaired customer, who has access to a TDD or a conventional teletypewriter (TTY) in the United States, can communicate with the manufacturer by dialing 1-800-380-CHRY. Canadian residents with hearing difficulties that require assistance can use the special needs relay service offered by Bell Canada. For TTY teletypewriter users, dial 711 and for Voice callers, dial 1-800-855-0511 to connect with a Bell Relay Service operator.

WARNING!

Engine exhaust, some of its constituents, and certain vehicle components contain, or emit, chemicals known to the State of California to cause cancer and birth defects, or other reproductive harm. In addition, certain fluids contained in vehicles and certain products of component wear contain, or emit, chemicals known to the State of California to cause cancer and birth defects, or other reproductive harm.

PUBLICATIONS ORDERING

- **If you are the first registered retail owner of your vehicle**, you may obtain one free printed copy of the Owner's Manual, Warranty Booklet or Radio Manuals on your DVD by calling 1-888-242-6342 (U.S.) or 1-800-387-1143 (Canada) or by contacting your studio.
- Replacement English User Guide kits or DVDs may be purchased by visiting www.techauthority.com or by calling 1-800-890-4038 (U.S.) or 1-800-387-1143 (Canada). Visa, Master Card, American Express and Discover orders are accepted. If you prefer mailing your order, please call the above numbers for an order form.

NOTE:

A street address is required when ordering manuals (no P.O. Boxes).

CUSTOMER ASSISTANCE

REPORTING SAFETY DEFECTS IN THE UNITED STATES

- If you believe that your vehicle has a defect that could cause a collision or cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying the manufacturer.
- If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your authorized studio and the manufacturer.
- To contact NHTSA, you may either call the Auto Safety Hotline toll free at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.safercar.gov>; or write to: Administrator, NHTSA, 1200 New Jersey Avenue, SE., West Building, Washington, D.C. 20590. You can also obtain other information about motor vehicle safety from <http://www.safercar.gov>.

In Canada

- If you believe that your vehicle has a safety defect, you should contact the Customer Service Department immediately. Canadian customers who wish to report a safety defect to the Canadian government should contact Transport Canada, Motor Vehicle Defect Investigations and Recalls at 1-800-333-0510 or go to <http://www.tc.gc.ca/eng/roadsafety/safedrivers-childsafety-index-53.htm>
- French Canadian customers who wish to report a safety defect to the Canadian government should contact Transport Canada, Motor Vehicle Defect Investigations and Recalls at 1-800-333-0510 or go to <http://www.tc.gc.ca/securiteroutiere/>

AUTHENTIC ACCESSORIES BY MOPAR®

- The following highlights just some of the many Authentic FIAT Accessories by Mopar® featuring a fit, finish, and functionality specifically for your 500e.
- In choosing Authentic Accessories you gain far more than expressive style, premium protection, or extreme entertainment, you also benefit from enhancing your vehicle with accessories that have been thoroughly tested and factory-approved.
- For the full line of Authentic FIAT Accessories by Mopar®, visit your local FIAT studio or online at mopar.com

EXTERIOR:

- Chrome Hood Spear
- Chrome Mirror Cover
- Vehicle Cover
- Side Window Air Deflectors
- Front End Cover
- Body Side Molding
- Wheel Pocket Inserts
- 16 inch Black Painted Wheels
- 16 inch Silver Painted Wheels
- Level 1 Portable Charger
- Level 2 Charging Station

INTERIOR:

- Door Sill Guards
- Roadside Safety Kit
- Key Covers
- Premium Carpet Floor Mats
- Slush Mats
- Cargo Organizer

ELECTRONICS:

- GPS Tracking System(s)
- Rear Park Distance Sensors
- Wi-Fi
- Sound System Upgrades
- Interior/Ambient Lighting

CARRIERS:

- Roof Rack
- Snowboard/Ski Carrier
- Bike Carrier
- Luggage Carrier
- Canoe Carrier
- Hitch-mount Bike Carrier

FAQ (How To?)

FREQUENTLY ASKED QUESTIONS

GETTING STARTED

- How do I charge my vehicle? 16
- How do I install my LATCH Equipped Child Seat? 22
- How do I fold down my rear seat? 26

ELECTRONICS

- What Sound System do I have? 40
- How do I set the clock on my radio? 41
- How do I set the presets on my radio? 41
- How do I connect my portable media player/iPod/MP3? 46
- How do I pair my cell phone via Bluetooth® with the BLUE&ME™ Hands-Free Communication System? 44

WHAT TO DO IN EMERGENCIES

- What do I do if my TPMS warning light is blinking?. 52
- How do I Jump-Start my vehicle? 60

MAINTAINING YOUR VEHICLE

- Where is my underhood fuse block located? 71
- Where is my interior fuse block located? 71
- What should my tire pressure be set at? 73

Arming Theft System (Security Alarm)19	Lights	
Automatic Temperature Control (ATC)35	Turn Signal30
Belts, Seat20	Maintenance Schedule69
Bulb Replacement76	Mirrors	
Charging16	Heated35
Child Restraint22	MOPAR® Accessories79
Clock Setting41	Placard, Tire and Loading Information73
Cruise Control (Speed Control)33	Programmable Electronic Features47
Customer Assistance77	Reclining Front Seats24
Defects, Reporting78	Recreational Towing50
Disarming, Theft System19	Replacement Bulbs76
Driver Cockpit6	Reporting Safety Defects78
Electronic Speed Control		Rotation, Tires74
(Cruise Control)33	Schedule, Maintenance69
Electronic Vehicle Information Center		Seat Belts20
(EVIC)47	Seats	
Emergency, In Case of		Adjustment24
Brake Warning Light53	Heated27
Towing63	Setting the Clock41
Enhanced Accident Response Feature64	Signals, Turn30
Event Data Recorder65	Speed Control	
Extending Driving Range28	Cancel34
Exterior Lights76	Speed Control (Cruise Control)33
Flash-To-Pass30	Store Radio Presets41
Freeing A Stuck Vehicle64	Stuck, Freeing64
Front Heated Seats27	Theft System Arming19
Fuse71	Theft System Disarming19
Fuses71	TIREFIT54
Heated Mirrors35	Tires	
Heated Seats27	Air Pressure73
Hood Release66	Pressure Warning Light52
Instrument Cluster Warning Lights51	Rotation74
Lane Change Assist30	Towing	
LATCH (Lower Anchors and Tether for		Disabled Vehicle63
Children)22	Recreational50
Level 1 Charging13	Towing Vehicle Behind a Motorhome50
Level 2 Charging13	Turn Signals30
		Washer	
		Rear32
		Wheel and Wheel Trim Care75
		Wind Buffeting37
		Wiper, Rear32

NOTES

NOTES

This guide has been prepared to help you get quickly acquainted with your new FIAT and to provide a convenient reference source for common questions. However, it is not a substitute for your Owner's Manual.


For complete operational instructions, maintenance procedures and important safety messages, please consult your Owner's Manual, Navigation/Uconnect® Manuals and other Warning Labels in your vehicle.

Not all features shown in this guide may apply to your vehicle. For additional information on accessories to help personalize your vehicle, visit www.mopar.com (U.S.), www.mopar.ca (Canada) or your local FIAT studio.

Driving and Alcohol: Drunken driving is one of the most frequent causes of collisions. Your driving ability can be seriously impaired with blood alcohol levels far below the legal minimum. If you are drinking, don't drive. Ride with a designated non-drinking driver, call a cab, a friend, or use public transportation.

WARNING

Driving after drinking can lead to a collision. Your perceptions are less sharp, your reflexes are slower, and your judgment is impaired when you have been drinking. Never drink and then drive.



Download a free Vehicle Information App

by visiting your application store, Keyword (My FIAT), or scanning the Microsoft Tag. To put Microsoft Tags to work for you, use your mobile phone's browser or App store to download a Microsoft Tag reader, like the free one at www.gettag.mobi. Then follow the directions to scan the code.

Download a FREE electronic copy

of the Owner's Manual or Warranty Booklet by visiting the Owner's tab at:
www.fiatusa.com (U.S.)